



retail cata

3 retail catalog 20

etail **catalog** reta


alog 2023 retailo

3 retail catalog 20

atalog retail cata

2023 catalog ret

atalog **2023**




calo catalog 202



IN-STORE DISPLAYS

Catching your customers attention and quickly expressing the features and functions of AutoPot is an essential part of driving sales. With our new illustrated point of sale fixtures you get a massive head start in introducing the range.

These sturdy displays are available to our all stockists on request. Contact your rep now for further details

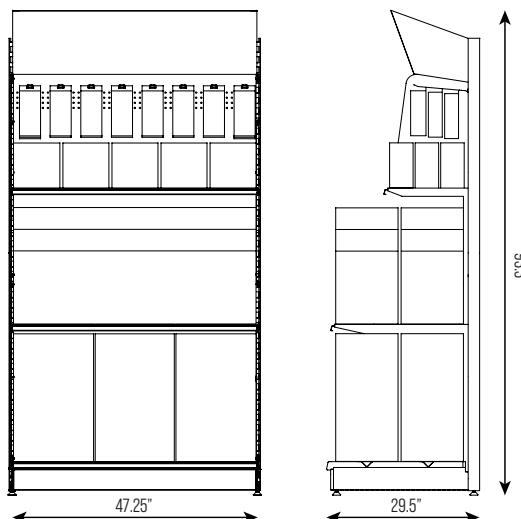

*AutoPot In-Store Displays can be adjusted to accommodate a wide range of products
- including our new, fully illustrated retail-boxed kits and systems - see below*



Tray2Grow System - for grow bags, micro herbs, pots, trays, and planters



*easy2grow System
incl. 12.4 gal reservoir*



AQUAbox Spyder - for raised bed gardening



*4Pot System incl.
12.4 gal reservoir*



*easy2Go Kit - garden
tray & pots not incl.*



*AQUAbox Straight - for
row crop gardening*

SALES DRIVING

Fully illustrated retail packaging showing products in action allows your customers to browse, appreciate, and approach you with confidence - vastly improving transactions.

SUSTAINABLE

We've introduced sustainably sourced cardboard, organic inks, and complete biodegradability to our retail packaging - the only responsible way forward.

FEATURE PACKED

For first-timers a watering system can seem daunting. All our packaging now features quick set-up guides and QR links to assembly videos - making AutoPot easy to grasp.



CONTENTS

| | |
|--|-------------------------|
| In-Store Displays | 2 |
| AQUAvalve5 | 4 - 5 |
| Growers Tips | 6 - 13 |
| Watering Systems | 14 - 39 |
| 1Pot Systems | 14 - 17 |
| easy2grow Systems | 18 - 21 |
| XL Systems | 22 - 25 |
| XL GeoPot Systems | 26 - 29 |
| XXL9 & XXL13 | 30 - 33 |
| Tray Systems & Fabric Pots | 34 - 37 |
| Tray2Grow | 38 - 39 |
| Kits & Accessories | 40 - 48 |
| Pot Divider & Strawberry Topper | 40 |
| Propagation Lids & Systems | 41 |
| easy2GO & CocoMat | 42 |
| easy2Propagate | 43 |
| PlantSkirt | 44 |
| AQUAbox Straight & Spyder | 45 |
| AQUAplates | 46 |
| AirDome & AirBase | 46 - 47 |
| Reservoirs | 48 - 51 & 54 |
| FlexiTank | 48 - 49 |
| FlexiTank Pro | 50 - 51 |
| Plastic Reservoirs | 54 |
| Modules & Module Packs | 52 |
| Pots & Trays | 53 |
| System Fittings (Incl. AQUAvalve Spares & Pipe) | 54-56 |
| 3/8" Fittings | 54 |
| 1/2" Fittings | 55 |
| 1/4" Fittings | 56 |
| Root Control | 57 |
| Garden Trays | 57 |
| AutoPot Growers & Store Resources | 58 - 59 |






THE PATENTED, POWER-FREE WATER CONTROL DEVICE

AT THE HEART OF EVERY AUTOPOT WATERING SYSTEM

GROW ANYWHERE WITH LOW OVERHEADS & ZERO WASTE

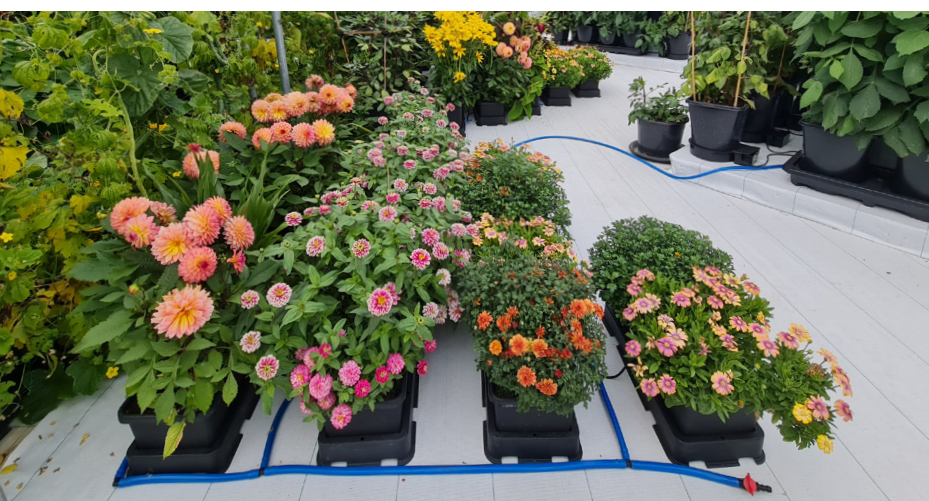

POWER-FREE

AQUAvalve5 is supplied with every AutoPot Watering System. Once connected to the water supply, the AQUAvalve5 will control the flow of water to the plants by simple gravity pressure from a reservoir or tank of any size. No pumps, mains water pressure, electricity or timers are ever required.

A FASTER FLOW

The needs of growers are ever-evolving, served by an increasingly diverse range of nutrients. With a 1/4" inlet, AQUAvalve5 rises to the challenge of delivering the widest range of nutrients in a faster flow for a quicker fill, maximizing system efficiency. Maintenance is reduced and the risk of blockages minimized.

PLANT CONTROLLED

AQUAvalve5 is an exceptionally responsive means of feeding. It opens to supply water to a 1" depth and then closes. Once the plants have used that supply the AQUAvalve5 reopens to repeat the cycle. No need to second guess plant requirements, compensate for conditions or recalibrate unnecessary pumps or computers.

E: INFO@AUTOPOT-USA.COM

 AUTOPOT-USA.COM

 [@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)

AQUAvalve⁵™


SUITABLE FOR USE WITH MINERAL OR ORGANIC LIQUID FERTILISERS

PLANT CONTROLLED - THE ULTIMATE IN RESPONSIVE IRRIGATION

GRAVITY-FED - REQUIRES NO PUMPS, TIMERS, COMPUTERS, OR RUNNING WATER




ANATOMY

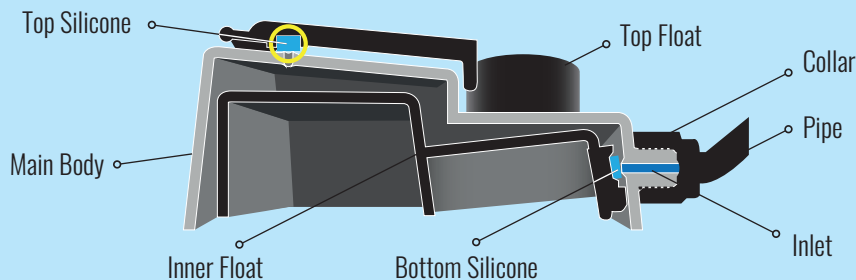


OPERATION


FOR AQUAVALVE CARE AND ADVICE SEE PAGE 13

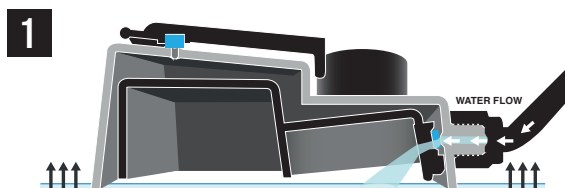


Once the AQUAvalve is positioned in a tray and connected to the water supply and the tap turned on, water will begin to flow into the tray through the AQUAvalve nozzle. The Inner Float will rise a little but the Top Float will remain in position, keeping the hole sealed on the Main Body and preventing the Inner Float from rising further.

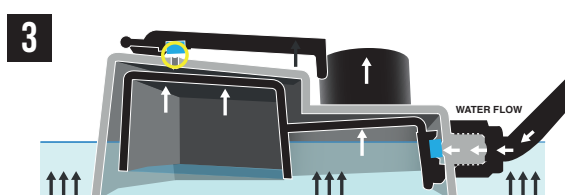


Once the water reaches 1" (half way on the AQUAvalve collar) the Upper Float will lift allowing the trapped air inside the Main Body to escape and simultaneously the Inner Float will rise and cut off the incoming water.

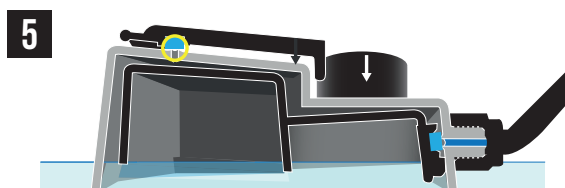


The sealing of the Main Body ensures that there is an air tight seal which in turn creates a vacuum inside the Main Body, this prevents the Inner Float from dropping and preventing any further nutrient solution from entering.

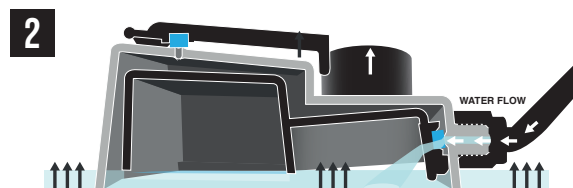

Trapped air inside the Main Body is unable to escape as the silicone in the Upper Float is creating a seal on the Main Body, water continues to enter into the tray as the Inner Float is unable to shut off due to the trapped air.

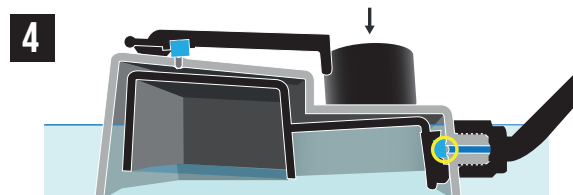

As the plants consume the nutrient solution the Top Float begins to drop back down re-sealing the hole on the Main Body creating an air tight seal.

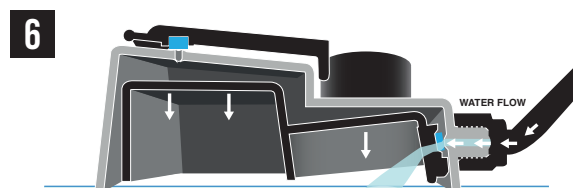

Once the nutrient solution drops below the Main Body of the AQUAvalve the surface tension of the water around the AQUAvalve Main Body will break, this can take up to an hour. The vacuum in the Main Body is then released and the Inner Float drops to a position where the inlet can reopen and the filling process begins again.

STEP 1: ROOT CONTROL

All AutoPot Watering Systems and Modules are supplied with root control. Depending on the system or module, root control may include some combination of PotSock and Root Control Disc (RCD). These are used in the following configurations:

1POT: RCD in tray (gold face up)

XL GeoPot: PotSock on base of pot (gold face up)

EASY2GROW: RCD in pot & PotSock Square on base of pot (both gold face up)

1POT XL: RCD in pot (gold face down)

NB: If growing aggressive plants we suggest using a RCD in the pot (gold face down) & PotSock on the base of the pot (gold face up)



STEP 2: SUBSTRATE CHOICE

A vast range of substrate options are viable with AutoPot. The following represent good examples of substrates that provide the requisite air retention and capillary action. Use quality substrates from reputable brands and ensure the mix is absorbent, light and fluffy. Ensure Clay Pebbles are pH stable or that they have been fully stabilised for at least 48hrs prior to use.



STEP 3: ADDING SUBSTRATE

For good drainage we recommend an AirBase (p.47) in each pot. Alternatively a 1" base layer of pH stable clay pebbles, pea gravel, or Growstones may be used.

FIRST ADD A BASE FOR DRAINAGE



If using AirDomes place the AirDome on the Root Control Disc and fit the AirBase on top / pour in clay pebbles, gravel, or Growstones to the height of the AirDome.

ADD SUBSTRATE UNTIL 1-2" / 2.5-5CM FROM TOP OF THE POT




Place your choice of substrates into the pot. Fill until substrate is 1-2" / 2.5-5cm below the top.

STEP 4: PLANT CHOICE

Always ensure an established plant is used when potting up. Don't place small seedlings directly into the pots. As a general rule:
easy2grow 2.2gal/8.5l - **Min. plant height 6"/15cm**
1Pot 3.9gal/15l - **Min. plant height 9"/22.5cm**
XL/GeoPot 6.6gal/25l - **Min. plant height 12"/30cm**

ONLY POT UP ESTABLISHED PLANTS



Pot up and with the pot outside the tray, water each pot through. When you see water draining from the bottom of the pot, stop. Allow the pot to drain for 15 mins.

HAND WATER POTS



OUTSIDE OF TRAYS AND ALLOW TO DRAIN
Before putting pots into trays clean the bottom and sides of each pot to help ensure the valve remains clean and free of substrate.

STEP 5: SYSTEM ACTIVATION

At this point the system **SHOULD NOT** be turned on, allow the plants to establish first. As a guide allow:
5-7 days for easy2grow 2.2gal/8.5l
7-12 days for 1Pot 3.9gal/15l
10-14 days for XL/GeoPot 6.6gal/25l

DO NOT SWITCH THE WATERING SYSTEM ON INITIALLY



During the rooting phase the roots will take up the initial "through-watering" and extend to seek out further moisture. Do not water again until day 5-10 of the rooting phase.



ALLOW PLANTS TIME TO ESTABLISH IN AUTOPOT POTS

Once you're happy the plants have rooted, turn the system on. Feeling the weight of the pots will give you an idea. If heavy plenty of moisture remains to be absorbed by developing roots, if light switch on.

STEP 6: AIRDOME ACTIVATION

DO NOT SWITCH ON AIRDOMES FOR 2-3 WEEKS



If using AirDomes do not activate them straight away, allow 2-3 weeks for the plants to establish before air is blown into the root zone. Always ensure that warm air is blown into the root zone, temperatures between 64°F - 70°F are perfect. Never blow cold or hot air into the root zone.

ONLY BLOW WARM AIR - NEVER HOT OR COLD



If using air domes: place air pumps away from cold floor surfaces and, if the night temperatures in your grow space drop, use a timer to turn off the pump at night.

STEP 7: NUTRIENT CHOICES & FLUSHING

AutoPot Watering Systems can be used with organic or mineral nutrients. As with all watering systems, care must be taken when using nutrients, especially in the case of organics. For full details of nutrient use and suitability see Nutrient Guides on pages 8-9. Do not attempt feeding without first consulting these guides.

Flushing is NOT necessary with food crops. With other crops flushing FROM ABOVE is NOT necessary, simply supply plain water from the reservoir to the modules for the last 10-14 days. DO NOT pour water through the top of the pots. Salt build up occurs in the top 1"/2.5cm of the substrate, where it has no detrimental effect on plant growth. Pouring water through the pot at the flushing stage may damage roots due to the toxicity of the salt build up at the top of the substrate.

SUBSTRATE INFO - PAGE 7

NUTRIENT USE INFO - PAGES 8-9

PROPAGATION INFO - PAGES 10-11

RESERVOIRS & WATER INFO - PAGE 12

SYSTEM MAINTENANCE INFO - PAGE 13

ESSENTIALS

AutoPot Watering Systems are extremely versatile and can be used with the growing medium / substrate of your choice. In growing trials we have cultivated plants in a vast range of substrates from coral to denim and even pumice stone! Whatever substrate you decide to use make sure the mix is absorbent, light, fluffy and free draining. An ideal substrate for use with AutoPot is a 50% mix of perlite or clay pebbles with either soil or coco. The following guidelines and examples may provide a good basis for substrate success.

- For good drainage we recommend an AirBase (p. 47) in the base of each pot. Alternatively a 1" layer of pH stable clay pebbles, pea gravel, Growstones may be used.
- Whether they are used at the bottom of the pot as additional drainage or as part of a mix, clay pebbles **MUST** be pH stable. Be aware that certain brands are **NOT** pH stable and will increase the pH of the water in the tray; this will negatively affect plant growth. To stabilise pebbles soak them in pH 5.0 water for 48hrs, then pour off water. **DO NOT RINSE.**
- Pay close attention to manufacturers instructions where preparation of media is concerned.
- Always use a good quality soil or coco from a reputable brand. Look for coco that has been buffered and stabilised. If unsure, pot up and pour approx 10ltrs of pH 5.6 water and ¼ strength feed through each pot - this will instantly stabilize the coco. Allow to drain thoroughly before use.
- Peat-based composts will compress if used alone, reducing the oxygen content in the root zone. Mix in perlite/clay pebbles/gravel to lighten the compost and improve aeration.

Consider that, though rich, peat can compress to virtual solidity. On the other hand Perlite will never compress. Try to create a mix that balances richness with aeration.

SUBSTRATE EXAMPLES & KEY QUALITIES

COCO / CLAY PEBBLES



Coco represents a natural, free-draining substrate that can be enhanced with beneficial bacteria and fungi to strengthen the root-zone and accelerate plant growth. The porosity and texture of the pebbles aids water retention, drainage and root-zone oxygenation.

COCO / PERLITE



Irregular, porous and rough surface textures such as those found on perlite granules provide aeration, superb water retention and also excellent drainage. Combined with the natural benefits and microbial enhancements available to coco, such mixes can give great results.

COCO / GROWSTONES



Growstones are made from recycled glass and are engineered to provide high porosity, improved aeration and better drainage of the root zone, while retaining water well. Growstones are alkaline and must be pH stabilized before use. Coco adds an active element to the mix by supporting bio-activity and, it is claimed, by delivering nutrients in synch with the plants requirements.

ROCKWOOL / CLAY PEBBLES



As it is derived from rocks Rockwool is inert and doesn't withhold or repel nutrients selectively in the way that some plant-based substrates can. Therefore it will deliver your nutrient solution in its purest form. However it will require buffering or stabilizing in advance of use. Pebbles provide drainage and water retention.

SOIL / CLAY PEBBLES



Soil is an excellent medium for supporting bio-activity and soil-based substrates are available to a vast number of specifications. A complimentary medium is essential in order to provide drainage, aeration, and prevent compression in the root zone. Clay pebbles are an ideal choice.

SOIL / PERLITE



Combining any one of the huge range of soil-based grow media with perlite can produce a wonderfully diverse, active, and airy mix. Water is retained perfectly whilst still free to drain and the risk of compacting is minimized.

MINERAL NUTRIENTS

If mineral feeding is selected, the liquid or soluble mineral nutrient is simply added to the water in the reservoir in a controlled manner and fed via the pipework to the AQUAvalves in the module trays. From there the plants take up the water/nutrient solution as and when they require it. Feed according to nutrient producers' guidelines.

ORGANIC NUTRIENTS

We recommend the following techniques when using organics with AutoPot Watering Systems - see below for Reservoir Feeding and opposite for Pot Feeding. The arrival of AQUAvalve5 has revolutionized the way in which organics can be fed through AutoPot Watering Systems. For the first time, we can recommend almost constant feeding of liquid organic nutrients, additives, and boosters in solution via the reservoir and pipework. It should be noted that this applies only to systems equipped with AQUAvalve5 and 3/8" pipe and fittings. Earlier model AQUAvalves with 1/4" pipe and fittings cannot feed liquid organics in solution via the reservoir and pipework on a constant basis. The wider apertures of fittings and pipework on AQUAvalve5 equipped systems produce vastly increased flow rates that practically eliminate potential blockages.


ORGANICS - RESERVOIR FEEDING

Supply of liquid organic feeds from the reservoir via pipework. **Only applicable to AQUAvalve5 equipped systems with 3/8" pipework and fittings.**


Uses: Employed by organic growers who wish to simplify and automate to the greatest possible degree. Ideal for confined spaces, large numbers of modules and max. automation.

Requirements: Watering system fitted with flush taps at ends of pipework runs. Reservoir to supply liquid organic feed in solution for the duration of the grow. Liquid organic feed.

Step 1. Setting Up




Fill reservoir with water and liquid organic nutrient. Follow nutrient producer's directions when adding feed.




A water pump should be used in the reservoir to keep the solution moving. It should not be necessary to run the pump constantly. 15mins every 2hrs is ideal.

Step 2. Once the reservoir has emptied



A Switch the reservoir off.



B Disconnect the reservoir.




C Clean the reservoir inside. Clean the water pump and inline filter. Reconnect.




D Refill with plain water only.


Step 3. Flush the pipework



A Switch the reservoir on.



B Place the flush taps at the ends of pipework runs into a container / safe drainage.




C Open flush taps for 30-60 secs. Allow plain water to flow out until it runs clear




D Close flush taps. Feed plants on plain water from reservoir for 24 hours.

Step 4. 24hrs after flushing



A Top up the reservoir with water as necessary.



B Add liquid organic feed again to correct dosage. Repeat.

Those wishing to grow organically with soil-based nutrients can also do so with AutoPot Watering Systems by Pot Feeding

ORGANICS - POT FEEDING

Use organic time release tabs, organic soils and/or bacteria in the pots. Use the reservoir and pipework to supply water only during the useful lifespan of the soil-based nutrients. Then, if required, for latter stages of growth hand feed organic feeds/teas directly into the trays or employ Reservoir Feeding (see Reservoir Feeding opposite) via the reservoir and pipework. Organic soils, bacteria and/or soil-based time-release tabs may become depleted after 5-7 weeks. The lifespan of soil or soil-based nutrients will depend on the type of plants being grown and the size of the pot being used. Regardless, an organic liquid supplement may become necessary during the latter stages of growth.

Uses: Employed by those wishing to maximize control, customization and/or use a variety of feed types including organic time release tabs/organic soils and/or bacteria in the pots with teas or organic feeds in latter stages.

Requirements: Watering system and reservoir. Reservoir supplies only plain water for the duration of the grow unless switching to Reservoir Feeding for latter growth stages.

Organic time release tabs/organic soils and/or bacteria in the pots.

Organic teas/boosters/feeds if Hand Feeding latter growth stages.

If Reservoir Feeding in latter growth stages see **Reservoir Feeding Requirements** (opposite).

ORGANICS - POT FEEDING TECHNIQUE

Step 1. Potting Up and Setting Up

- When potting up use organic soils and/or add bacteria and/or organic time release tabs of your choice to the substrate. Reservoir supplies your plants with water only.





Step 2. If useful lifespan of soil-based nutrients has elapsed

- Either Reservoir Feed. See Reservoir Feeding section (overleaf) for details.
- Or Hand Feed (see below) directly into module trays


Step 3. Hand Feed organics directly into the trays - Once every 5-7 days

- Switch Reservoir off and allow module trays to run dry - approx 12hrs




Step 4. 12hrs after switching off Reservoir

- Prepare the organic solution of your choice




Step 5.

- Using a small watering can or jug, pour the solution in a controlled manner next to the AQUAvalve, NOT ON THE AQUAvalve

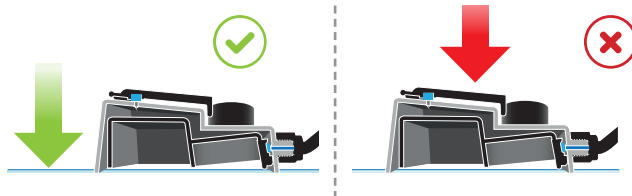


- Fill the tray to the point where the pipe enters the tray and stop
- DO NOT pour the solution into the top of the pot as you will potentially risk flooding the tray and growing area

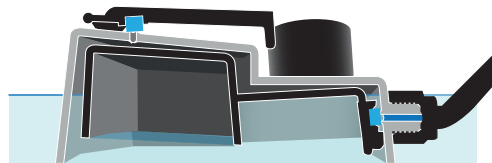

- Leave the solution to be consumed by the plants in each tray and then repeat the process after 30 minutes

Step 6. 24hrs after feeding/once trays have run dry

- Switch Reservoir on to restore supply of water.
- Repeat process every 5-7 days as required



PREPARATION

CocoMats are an excellent means of irrigating and feeding young plants during propagation. Made of coco fibre and natural latex, the CocoMat controls watering by holding and gradually wicking the water to the plants via capillary action. CocoMats can be cut to fit any size of garden tray. Prepare your CocoMat, place into your tray, followed by a root control sheet and sit small pots, seed trays, plugs, cubes, or root balls on top.

To prepare your CocoMat place it in pH 4.5 water and keep fully submerged to soak for 24-48hrs. During this 24-48hrs the pH of the water may fluctuate as the CocoMat stabilizes. There is no need to compensate for fluctuation in the pH levels. Rinse before use. A root control sheet will be required on top of the CocoMat. To prepare, submerge the root control sheet in water for 30mins. This is merely in order to wet the sheet. It is not necessary to check the water pH during this soak.

SET UP - USING EASY2PROPAGATE WITHOUT AQUAVALVE

Growers can use CocoMat in easy2Propagate with or without AQUAvalve. If not using AQUAvalve simply place the prepared CocoMat in the easy2Propagate tray. Place the prepared root control sheet on top of the CocoMat – gold face up.

Place small pots or seed trays on the surface of the root control sheet. Ensure pots/seed trays are flat based and that they allow the growing media to make contact with the surface of the root control sheet. If using plugs, cubes or root balls ensure that they are in full contact with the root control sheet.

Water through each pot, seed cell, cube, plug, or root ball once from the top. This helps ensure capillary action starts between the surface of the root control sheet and the growing media on the root control sheet. Pour water into the tray until the CocoMat is 2/3 submerged. Quarter strength nutrient solution may be added if required.

To ensure that your plants receive full levels of light remove protective film from easy2Propagate Lid. Place easy2Propagate Lid onto tray ensuring all corners are fitted snugly.

SET UP - USING EASY2PROPAGATE WITH AQUAVALVE


Cut a section out of one corner of the CocoMat using heavy duty scissors, this is to allow a space for the AQUAvalve and AQUAvalve cover to sit on the garden tray. Allow sufficient space for both to fit comfortably - 8" x 5" is ideal. Cutting is easier after the CocoMat has been soaked. Cut an identically sized, identically placed section out of the root control sheet to allow placement of the AQUAvalve and AQUAvalve cover. Place the CocoMat in the easy2Propagate tray. Place the root control sheet on top of the CocoMat gold face up.

Now place small pots or seed trays on the surface of the root control sheet. ensure that pots / seed trays are flat based and that they allow the growing media to make contact with the surface of the root control sheet. Similarly, always ensure that plugs, cubes or root balls are in full contact with the root control sheet.

Water through each pot, seed cell, cube, plug, or root ball once from the top. This will help ensure that capillary action starts between the surface of the root control sheet and the growing media in contact with the root control sheet.

SET UP - THE AQUAVALVE

1




Remove threaded collar from AQUAvalve.

Push one end of the ready-assembled 3/8" Elbow Bar through the collar and attach to AQUAvalve nozzle.

Then replace the AQUAvalve collar.

2




Place the AQUAvalve cover over the AQUAvalve.

The AQUAvalve and cover should be placed directly onto the tray.


Ensure the circular spirit level indicates the tray is level, adjust if required.

3



Cut 3/8" pipe to appropriate length if required. Connect to 3/8" Elbow Bar.

4



Position the 3/8" Elbow Bar so that it routes out of the piping port in the easy2Propagate lid.

Ensure:

- The pipe does not trap
- The lid fits snugly
- AQUAvalve and Cover still sit flat on the tray.

5



Connect to your system using 1/2" or 3/8" fittings.

6




To connect the FlexiTank push 1/2-3/8" Click Fit Adapter and Filter onto the 3/8" pipe.

Then push the Click-Fit Adapter and Filter onto the FlexiTank tap.

OPERATION


There are four vents in the easy2Propagate lid. Initially these should be kept shut to maintain warmth and humidity levels. Later the vents can gradually be opened as small seedlings/cuttings establish a root system and need "hardening off". See illustration below for further details.

Close vents to generate temperature and humidity

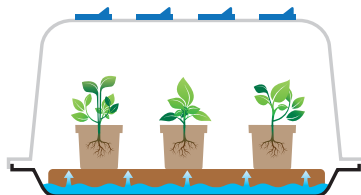


If your area is not sufficiently warm use heat pads under the tray or propagation lights above it to warm the water and create humidity.

When to begin opening the vents

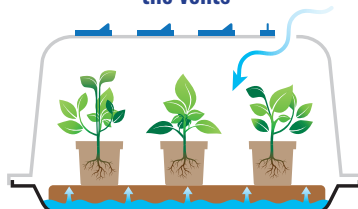

Once the seedlings or cuttings have rooted you can begin to gradually open the vents.

Hardening off

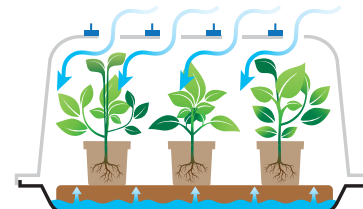

Once the vents are fully opened leave for several days prior to removing the lid.

SEE PAGES 36-37 FOR EASY2PROPAGATE

SEE PAGE 41 FOR 4POT PRO - A COMPLETE SYSTEM INCLUDING PROPAGATION DOMES

ADVICE

Nutrients - Suitable mineral fertilizers, whether liquid or powdered, can be used if required. Do not attempt to use organic fertilizers when using CocoMats. The CocoMats are designed to deliver nutrients at exactly the gradual rate required by plants at this stage of development. This gradual rate of nutrient uptake is far slower than the rate at which organic nutrients decompose. Organic nutrients will simply fall apart before they reach the plants.

Remember that young plants need less food than established ones. Do not connect your easy2Propagate to an AutoPot growing system that is also feeding established plants.

Water - All water supplied to the propagator, whether enriched with nutrients or not, should have a pH of 5.5-5.6. This pH level best compliments the composition of the CocoMat. The desirable Ec/ppm of the water being supplied will be dependent on the stage of the young plants growth and the substrate used.

Substrates & Pots - Plants or seedlings in pots, seed trays, plugs or cubes can be propagated on CocoMats in an easy2Propagate. If pots or seed trays are chosen they may contain a wide range of substrates or blends - rockwool, soil, coco, perlite, and vermiculite represent just a few examples. If a potted substrate or blend is selected it must contain some ingredient that supports capillary action.

If using raised terracotta or bonsai pots, a small length of capillary matting (not included) can be cut and pushed inside the hole at the bottom of the raised pot. The capillary matting will act as a wick.

Orchids will thrive when using the easy2Propagate but will need to be in net pots or similar, please note that suitable water, such as rain water will need to be used if irrigating Orchids along with a suitable liquid mineral feed.

Temperature - During germination/rooting of cuttings we recommend a target temperature of 70-80°F / 25-30°C with minimum 80% humidity. Once rooted reduce temperature and humidity by 10/15%.

A suitable heat mat can be used under the easy2Propagate tray to help maintain warmth to delicate young plants, if required.

Connection - Multiple easy2Propagate units can be simultaneously fed from a single reservoir. Each propagator can be added as an extension from the main feeding line in a matter of minutes. easy2Propagate incorporates AutoPot AQUAvalve technology so each propagator functions entirely independently of the others, there is no recirculation of water or nutrients, no plumbing is required for waste as the units utilize every drop. Growth in each propagator can commence or cease without impacting other propagators in the system.

Such propagation systems are often created with the use of Danish trolleys and a header reservoir/tank. The Danish trolleys can be used to incorporate lights and/or heat mats and will help maximize growing space. If Danish trolleys are not an option then multiple propagators may still function in a system. Whatever the arrangement, ensure the reservoir is positioned above the highest propagator.

After plants have been potted up and have grown larger the easy2Propagate can continue to be utilized without the dome in order to provide ultra-low maintenance feeding.

TYPES OF RESERVOIR

- AutoPot Watering Systems are supplied with reservoirs specifically selected on the basis of their capacity to serve the number of pots in that system.
- Should you wish to use an alternative reservoir it is simple to do so thanks to our range of click-fit adapters and filters but it is important to ensure you have sufficient capacity.
- AutoPot offer three types of reservoir; Rigid Plastic Reservoirs, Flexi Tanks and FlexiTank Pro. Rigid Plastic Reservoirs are supplied with smaller systems. Flexi Tanks come as standard with any system of six pots or more (1Pot XL/XL GeoPot) and with any system of eight pots or more (1Pot/easy2grow). FlexiTank Pro is an optional upgrade / separate.
- The guidance below applies to all three types of AutoPot reservoirs. It also applies as a general guide to use of non-AutoPot reservoirs where combined with AutoPot Watering Systems, although we cannot take responsibility for any issues arising from the use of non-AutoPot reservoirs or the use of guidance below in relation to non-AutoPot reservoirs.

SET UP

- Get your reservoir correctly positioned before filling. Never attempt to drag or otherwise reposition a reservoir when in use, regardless of the fill level.
- Gravity pressure is necessary in order for the system to function therefore always raise your reservoir to a minimum of 6" above the highest AQUAvalve5.
- Always use a filter with your reservoir, check filters once a week and clean if necessary - especially if using organics / if in a poor water area.
- Do not place an air stone in the reservoir as this can raise pH levels of the nutrient solution. A water pump may be used to agitate the solution but is not necessary.

OPERATION

- Gravity pressure is necessary in order for the system to function - therefore always raise your tank to a minimum of 6" above the highest AQUAvalve5.
- AQUAvalve5 has revolutionized the way in which organics can be fed through AutoPot Watering Systems. For the first time, we can recommend almost constant feeding of liquid organic nutrients, additives, and boosters in solution via the reservoir and pipework. It should be noted that this applies only to systems equipped with AQUAvalve5 and 3/8" pipe and fittings. Earlier model AQUAvalves with 1/4" pipe and fittings cannot feed liquid organics in solution via the reservoir and pipework on a constant basis. The wider apertures of fittings and pipework on AQUAvalve5 equipped systems produce vastly increased flow rates that practically eliminate potential blockages.
- Re-fill the reservoir when there is approximately a 1/3 of the solution left - NEVER ALLOW THE RESERVOIR TO RUN EMPTY.
- When refilling the reservoir turn the tap off. Refill then leave for 30-60 minutes. Then turn the tap back on. This procedure prevents any sediment being pulled through the pipes whilst refilling.
- Use your reservoir to flush your pots at the end of your growing season. Simply supply pH stable plain water from the reservoir to the modules for the last 10-14 days. DO NOT pour water through the top of the pots. Salt build up occurs in the top 1"/2.5cm of the substrate, where it has no detrimental effect on the plants growth. Pouring water through the pot at the flushing stage may damage roots due to the toxicity of the salt build up at the top of the substrate.

WATER & TEMPERATURE

- Generally the reservoir is best positioned outside the growing area.
- Aim for a water temperatures of between 64°F and 70°F in the reservoir
- Aim for a pH of 5.8 if growing with soil or 5.5-5.6 if with coco.
- Always use a filter with your reservoir, check filters once a week and clean if necessary - especially if using organics / if in a poor water area.
- If you are in a hard water area it may be necessary to flush your pipework more than once a week. Hard water reacts more with nutrients creating sediments that can build up.
- We always recommend the use of Water Monitoring devices. Such devices allow you to monitor temperature, pH, and conductivity. They help you read the warning signs before your plants are affected by fluctuations, they can illuminate the causes of changes in growth and, ultimately, they can ensure you get the most from your plants.
- If your water temperatures exceed 21°C / 70° F oxygen content in the water starts to rapidly decrease. This may have an adverse effect on plant health.
- If using organics, additives, or boosters clean the reservoir every time it is almost empty. To do this, disconnect, empty and discard any remaining nutrient, clean the tank out, and refill with pH stable plain water. Reconnect and run with this pH stable plain water for 12/24hrs before adding feed again.

ALL AUTOPOT MODULES & WATERING SYSTEMS

- The entire AutoPot range is now supplied as standard with the improved, large-bore AQUAvalve5 and with 3/8", 3/8"-1/2", and 1/2" pipework and fittings.
- The original AQUAvalve5, the 1/4" pipework and 1/4" fittings previously supplied with AutoPot Watering Systems are still available as spares, as are 1/2"-1/4" fittings.
- Newly sold Tray Systems, AQUAbox Straight, AQUAbox Spyder, and 12.4 gal reservoirs are drilled out to accept 3/8" pipe and fittings.



FILTERS

- Always use a filter with your reservoir, check filters once a week and clean if necessary - especially if using organics / if in a poor water area.
- Wash filter material in mild soap and lukewarm water or in dilute hydrogen peroxide
- Once disassembled the filter bodies can be washed in mild soap and lukewarm water, in dilute hydrogen peroxide, or in a dishwasher
- Depending on the condition of your filter replace every 5 yrs. Golf Filters feature a replaceable material available separately from AutoPot.



If elevating your FlexiTank on a stand, connect your inline filter so it is further down the 1/2" piping and not next to the tank. Installing the inline filter too close to the FlexiTank will pull at the material and may create leaks.




AQUAVALVE

Ensuring that the AQUAvalve floods and drains correctly

- Ensure the two silicones are in place. Hold the AQUAvalve at eye level so that you can see the silicone fitted to the top float resting on the hole below it. The silicone must create a tight seal when touching the hole. If it looks like it is not sitting parallel on the hole below, simply lift the top float and apply pressure to one side of the silicone, drop the float and hold at eye level again. Repeat the procedure if necessary.
- Ensure the AQUAvalve is secured to the tray. If using AutoPot trays position the half-moon on the bottom of the AQUAvalve over the T-section in the tray, push down firmly on the main body only. If using in a garden tray place an AQUAvalve Cover over the AQUAvalve.

Cleaning

- AQUAvalve is easily disassembled. Held vertically the top float will slide all the way across. The bottom float unclips from its pivot position.
- Ensure that silicones are removed from the AQUAvalve before cleaning and are only replaced when the AQUAvalve is completely dry.
- AQUAvalves can be scrubbed using a toothbrush or even placed in the dishwasher.
- Blowing through the AQUAvalve nozzle or use of a pipe cleaner or paperclip will help remove any build up that has occurred.
- When disassembling the system dip the still-connected AQUAvalve and pipe in hot water to ease separation. Once loosened remove the pipework by pulling it directly away from the nozzle. Avoid twisting/wiggling the end of the pipe away from the nozzle.
- Do not under any circumstances use a drill to clear the AQUAvalve nozzle. This will potentially damage the AQUAvalve beyond repair.



FITTINGS

- Utilize the flush taps at the ends of the pipework to help keep the system clean and free of sediment. To do so open each tap into a bucket or similar for 30 secs-1 min. Do this once a week if using mineral nutrient. Ideally undertake once you have re-filled your reservoir and allowed it to settle for an hour. A full reservoir provides you with the maximum pressure to flush.
- AutoPot only supply and only recommend official AutoPot-branded fittings for use with AutoPot Watering Systems.



PIPEWORK

- Dip the end of your pipe in hot water before connecting to fittings. This will soften the pipe and allow you to connect fittings with ease.
- When disassembling the system dip the still-connected fitting and pipe in hot water to ease separation.
- If using mineral additives or organics in a larger system you may wish to use a line cleaner such as D-Block, Drip Clean or Keep It Clean. With regular plain water flushing this should not be absolutely necessary but remains an option if desired.




GEOPOTS

- GeoPots are incredibly durable and can be reused repeatedly. They can also be washed if desired.
- Powdery green or white discoloration can occur on the outside of the pot but is entirely natural. It is merely salt or mineral build up.
- Empty after using and let the pot dry. After a few days remaining debris will easily brush off. At this point the pot is ready for reuse.
- If desired, growers can then also wash the bags in peroxide to sterilize - either in a washing machine or dipped in a tub.
- Allow to dry naturally. Do not put GeoPots in a tumble dryer.



PLASTIC POTS

- Always clean the side and bottom of each pot before you place in the tray, this will remove any soil particles and ensure your system is clean. In turn ensuring your AQUAvalve5 is kept clean and free of growing media - especially if growing with Perlite.
- The 3.9 gal pots used in the 1Pot module and the 2.2 gal pots used in the easy2grow module are interchangeable and can be used in either tray.
- Don't place trays on cold concrete floors, water in the tray will be chilled from below and will effect plant growth. Consider placing polystyrene, cardboard under each tray to ensure the water temperature in the tray is not affected. Always ensure trays are level.

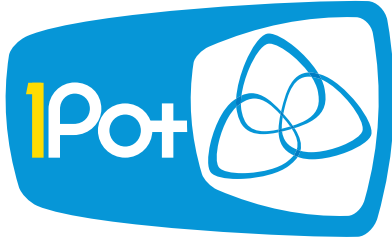

INCREDIBLE YIELDS FOR HOUSEHOLD GARDENERS AND COMMERCIAL GROWERS

FOR ALL STAGES OF ADULT GROWTH - 3.9 GAL POT AS STANDARD, ALSO FITS 2.2 GAL

SIMPLE, EFFICIENT, LOW MAINTENANCE FEEDING AND WATERING OF PLANTS



EFFICIENCY

As with all AutoPot Watering Systems, the 1Pot module operates power-free without wasting a drop of water or fertilizer. The benefits of this efficiency are twofold. Your overheads are decimated at a stroke and, without reliance on utilities, any space becomes a viable proposition for growing.

E: INFO@AUTOPOT-USA.COM

VERSATILITY


The 1Pot Module can be used for a wide range of plant types and sizes. Flowering plants and shrubs thrive and produce an abundance of blooms and foliage. Modules are supplied with 3.9 gal pots but the tray also perfectly accommodates our 2.2 gal pot, allowing you to alternate between crops with ease.

 **AUTOPOT-USA.COM**

LONGEVITY

If your plants require a large individual footprint, typically achieve greater-than-average height, or grow over a longer period then the 1Pot Module represents an excellent option. AutoPot modules require no plumbing for recirculation or waste water so they can be added or removed from a layout at will.

 **[@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)**

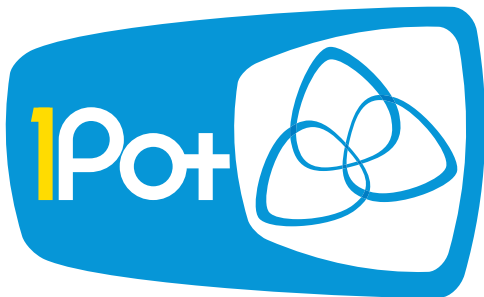

ALL SYSTEMS COMPLETE WITH PIPEWORK AND FITTINGS

FOR FLOORSPACE REQUIREMENTS SEE PAGES 16-17

MSRP - MANUFACTURERS SUGGESTED RETAIL PRICE



ASK US ABOUT UPGRADING TO A FLEXITANK PRO!



1POT SYSTEM - APWS101

with 12.4 gal reservoir

MSRP \$92.49



2POT SYSTEM - APWS102

with 12.4 gal reservoir

MSRP \$151.99



4POT SYSTEM - APWS001

with 12.4 gal reservoir

MSRP \$264.29



6POT SYSTEM - APWS103

with 12.4 gal reservoir

MSRP \$363.59



8POT SYSTEM - APWS002

with 25 gal FlexiTank

MSRP \$479.99



9POT SYSTEM - APWS109

with 25 gal FlexiTank

MSRP \$551.99



12POT SYSTEM - APWS003

with 60 gal FlexiTank

MSRP \$717.99



16POT SYSTEM - APWS16P

with 60 gal FlexiTank

MSRP \$929.99



24POT SYSTEM - APWS104

with 105 gal FlexiTank

MSRP \$1,420.99



36POT SYSTEM - APWS136

with 105 gal FlexiTank

MSRP \$2,020.99



48POT SYSTEM - APWS105

with 105 gal FlexiTank

MSRP \$2,688.99



60POT SYSTEM - APWS106

with 105 gal FlexiTank


MSRP \$3,203.99



80POT SYSTEM - APWS107

with 200 gal FlexiTank


MSRP \$3,951.99

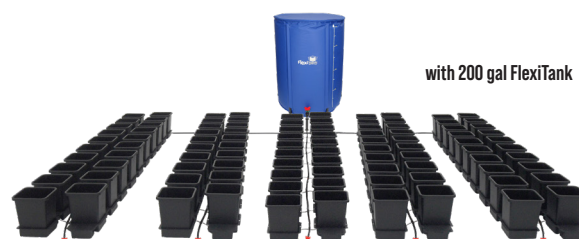

100POT SYSTEM - APWS108


with 200 gal FlexiTank

MSRP \$4,545.99

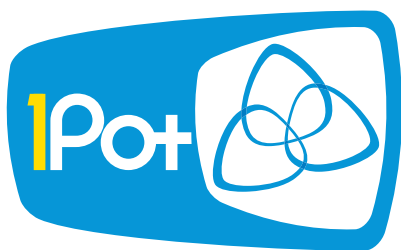


SYSTEM SPECIFICATIONS

- AQUAvalve5
- 3/8" Top Hat (TH) Grommet
- 3/8" pipe
- 3/8" Inline Tap
- 1/2" Click Fit Filter
- 3/8" Golf Filter
- 1/2" pipe
- 1/2" Inline Tap

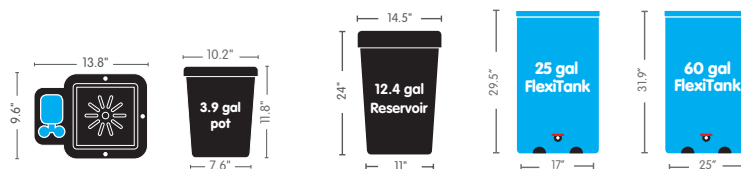

- 1/2" Cross Connector
- 1/2-3/8" Cross Connector
- 3/8" Cross Connector
- 1/2" Tee Connector
- 1/2-3/8" Tee Connector
- 3/8" Tee Connector

1POT SYSTEM - APWS101




CONTENTS

- 1x 12.4 gal reservoir & lid
- 2x 3/8" TH grommet
- 1x 3/8" golf filter
- 1x 1Pot tray & lid
- 1x 3.9 gal pot
- 1x 3/8" inline tap
- 1x AQUAvalve5
- 5 ft of 3/8" pipe
- 1x root control disc
- 1x instruction sheet

FLOORSACE REQUIREMENTS: 2' 7" x 2' 7" EX. RES.

2POT SYSTEM - APWS102




CONTENTS

- 1x 12.4 gal reservoir & lid
- 3x 3/8" TH grommet
- 1x 3/8" golf filter
- 2x 1Pot tray & lid
- 2x 3.9 gal pot
- 1x 3/8" cross connector
- 2x 3/8" inline tap
- 2x AQUAvalve5
- 6.6 ft of 3/8" pipe
- 2x root control disc
- 1x instruction sheet

FLOORSACE REQUIREMENTS: 3.3 FT x 3.3 FT EX. RES.

4POT SYSTEM - APWS001

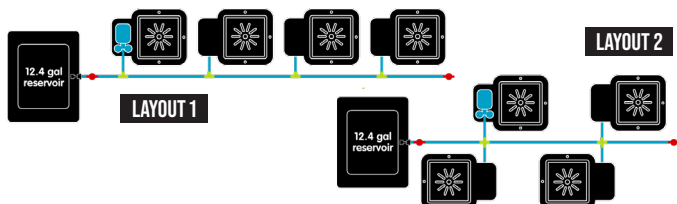


CONTENTS

- 1x 12.4 gal reservoir & lid
- 4x 1Pot tray & lid
- 5x 3/8" TH grommet
- 1x 3/8" golf filter
- 4x 3.9 gal pot
- 2x 3/8" inline tap
- 4x AQUAvalve5
- 2x 3/8" cross connector
- 4x 3/8" tee connector
- 13 ft of 3/8" pipe
- 4x root control disc

FLOORSACE REQUIREMENTS: 4' x 4' EX. RES.

6POT SYSTEM - APWS103

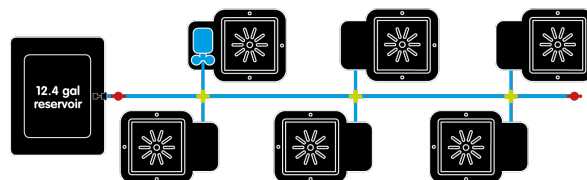


CONTENTS

- 1x 12.4 gal reservoir & lid
- 6x 1Pot tray & lid
- 7x 3/8" TH grommet
- 1x 3/8" golf filter
- 6x 3.9 gal pot
- 2x 3/8" inline tap
- 6x AQUAvalve5
- 3x 3/8" cross connector
- 20 ft of 3/8" pipe
- 6x root control disc
- 1x instruction sheet

FLOORSACE REQUIREMENTS: 6' 6" x 4' EX. RES.

8POT SYSTEM - APWS002

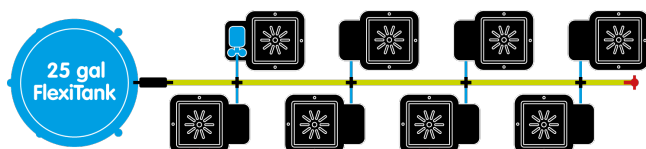


CONTENTS

- 1x 25 gal FlexiTank
- 8x 1Pot tray & lid
- 1x 1/2" click-fit filter
- 8x 3/8" TH grommet
- 8x 3.9 gal pot
- 1x 1/2" inline tap
- 8x AQUAvalve5
- 4x 1/2-3/8" cross connector
- 13 ft of 3/8" pipe
- 13 ft of 1/2" pipe
- 8x root control disc
- 1x instruction sheet

FLOORSACE REQUIREMENTS: 10' x 3' 3" EX. RES.

9POT SYSTEM - APWS109

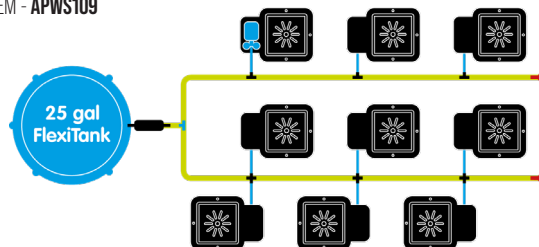


CONTENTS

- 1x 25 gal FlexiTank
- 9x 1Pot tray & lid
- 1x 1/2" click-fit filter
- 9x 3/8" TH grommet
- 9x 3.9 gal pot
- 1x 1/2" inline tap
- 9x AQUAvalve5
- 3x 1/2-3/8" cross connector
- 3x 1/2-3/8" tee connector
- 15 ft of 3/8" pipe
- 20 ft of 1/2" pipe
- 9x root control disc
- 1x 1/2" tee
- 1x instruction sheet

FLOORSACE REQUIREMENTS: 6.5 FT x 6.5 FT EX. RES.

12POT SYSTEM - APWS003

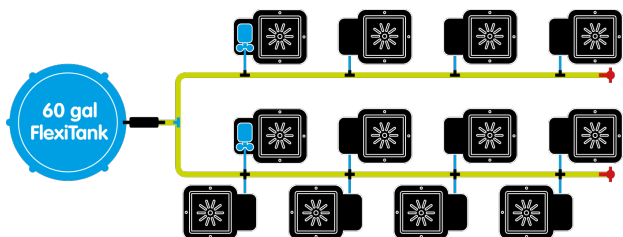


CONTENTS

- 1x 60 gal FlexiTank
- 12x 1Pot tray & lid
- 1x 1/2" click-fit filter
- 12x 3/8" TH grommet
- 12x 3.9 gal pot
- 2x 1/2" inline tap
- 12x AQUAvalve5
- 4x 1/2-3/8" cross connector
- 4x 1/2-3/8" tee connector
- 1x 1/2" tee connector
- 20 ft of 3/8" pipe
- 26 ft of 1/2" pipe
- 12x root ctrl disc
- 1x instruction sheet

FLOORSACE REQUIREMENTS: 6' 6" x 6' 6" FT EX. RES.


16POT SYSTEM - APWS16P

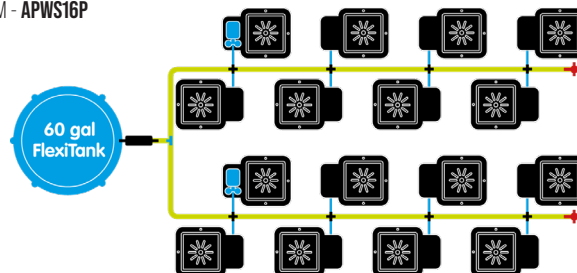


CONTENTS

- 1x 60 gal FlexiTank
- 16x 1Pot tray & lid
- 1x 1/2" click-fit filter
- 16x 3/8" TH grommet
- 16x 3.9 gal pot
- 2x 1/2" inline tap
- 16x AQUAvalve5
- 1x 1/2" tee connector
- 8x 1/2-3/8" cross connector
- 26 ft of 3/8" pipe
- 26 ft of 1/2" pipe
- 16x root control disc
- 1x instruction sheet


FLOORSACE REQUIREMENTS: 8' 2" x 8' 2" EX. RES.

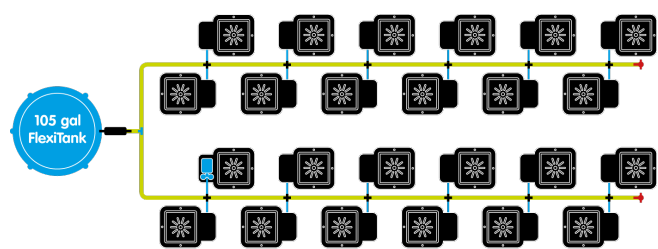**CONTENTS**


| | | |
|--------------------------|------------------------------|-----------------------|
| 1x 105 gal FlexiTank | 24x 3/8" TH grommet | 24x AQUAvalve5 |
| 24x 1Pot tray & lid | 1x 1/2" tee connector | 24x root control disc |
| 1x 1/2" click-fit filter | 12x 1/2-3/8" cross connector | 39 ft of 3/8" pipe |
| 2x 1/2" inline tap | 24x 3.9 gal pot | 32 ft of 1/2" pipe |
| | | 1x instruction sheet |

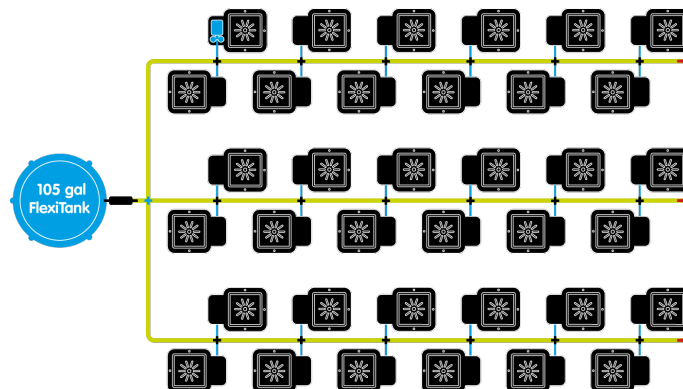FLOORSACE REQUIREMENTS: 6' 6" x 10' EX. RES.**CONTENTS**


| | | |
|--------------------------|------------------------------|-----------------------|
| 1x 105 gal FlexiTank | 36x 3/8" TH grommet | 36x AQUAvalve5 |
| 36x 1Pot tray & lid | 1x 1/2" cross connector | 36x root control disc |
| 1x 1/2" click-fit filter | 18x 1/2-3/8" cross connector | 59 ft of 3/8" pipe |
| 3x 1/2" inline tap | 36x 3.9 gal pot | 49 ft of 1/2" pipe |
| | | 1x instruction sheet |

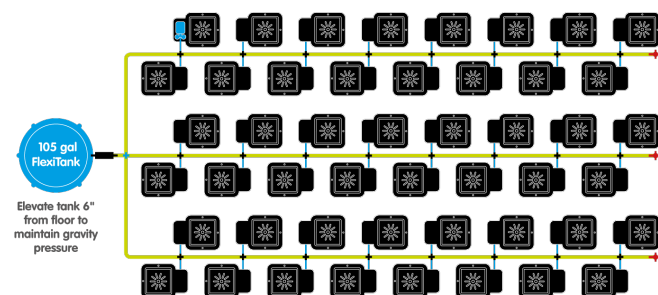FLOORSACE REQUIREMENTS: 11' 5" x 11' 5" EX. RES.**CONTENTS**


| | | |
|--------------------------|------------------------------|-----------------------|
| 1x 105 gal FlexiTank | 48x 3/8" TH grommet | 48x AQUAvalve5 |
| 48x 1Pot tray & lid | 1x 1/2" cross connector | 48x root control disc |
| 1x 1/2" click-fit filter | 24x 1/2-3/8" cross connector | 78 ft of 3/8" pipe |
| 3x 1/2" inline tap | 48x 3.9 gal pot | 75 ft of 1/2" pipe |
| | | 1x instruction sheet |

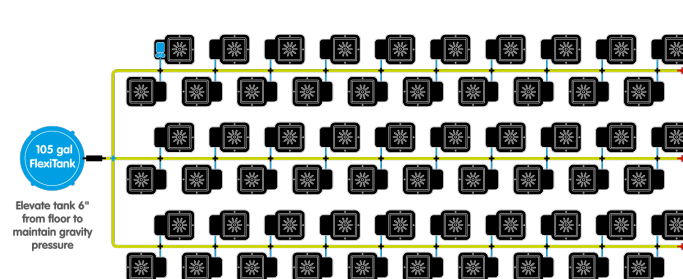FLOORSACE REQUIREMENTS: 13' 1" x 13' 1" EX. RES.**CONTENTS**

| | | |
|--------------------------|------------------------------|-----------------------|
| 1x 105 gal FlexiTank | 60x 3/8" TH grommet | 60x AQUAvalve5 |
| 60x 1Pot tray & lid | 1x 1/2" cross connector | 60x root control disc |
| 1x 1/2" click-fit filter | 30x 1/2-3/8" cross connector | 98 ft of 3/8" pipe |
| 3x 1/2" inline tap | 60x 3.9 gal pot | 82 ft of 1/2" pipe |
| | | 1x instruction sheet |

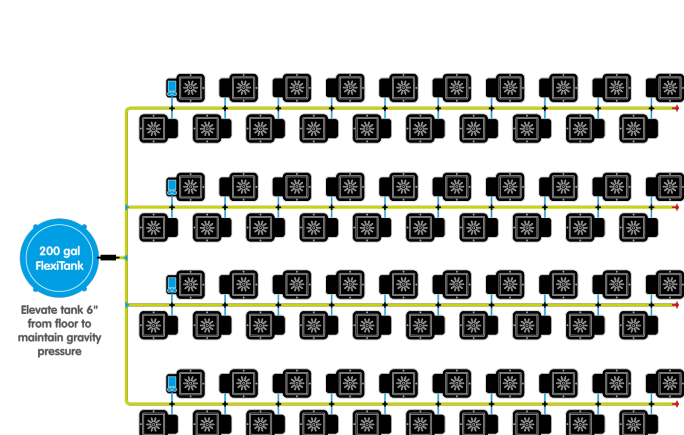FLOORSACE REQUIREMENTS: 18' x 18' EX. RES.**CONTENTS**

| | | |
|--------------------------|------------------------------|-----------------------|
| 1x 200 gal FlexiTank | 80x 3/8" TH grommet | 80x AQUAvalve5 |
| 80x 1Pot tray & lid | 3x 1/2" tee connector | 80x root control disc |
| 1x 1/2" click-fit filter | 40x 1/2-3/8" cross connector | 131 ft of 3/8" pipe |
| 4x 1/2" inline tap | 80x 3.9 gal pot | 98 ft of 1/2" pipe |
| | | 1x instruction sheet |

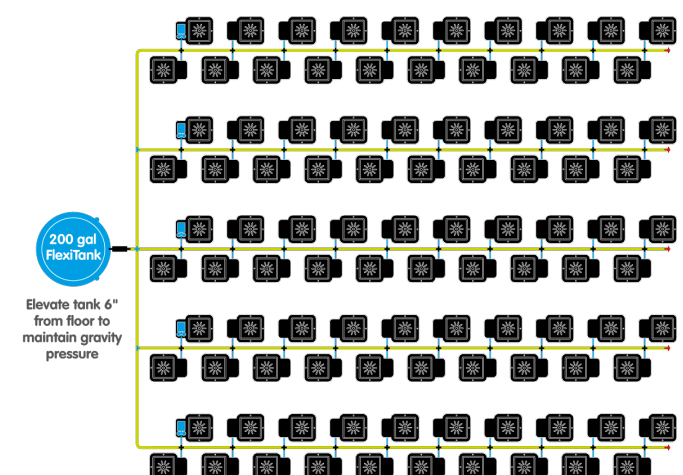FLOORSACE REQUIREMENTS: 19' 8" x 16' 4" EX. RES.**CONTENTS**

| | | |
|--------------------------|------------------------------|------------------------|
| 1x 200 gal FlexiTank | 2x 1/2" tee connector | 100x 3.9 gal pot |
| 100x 1Pot tray & lid | 100x 3/8" TH grommet | 100x AQUAvalve5 |
| 1x 1/2" click-fit filter | 1x 1/2" cross connector | 100x root control disc |
| 5x 1/2" inline tap | 50x 1/2-3/8" cross connector | 164 ft of 3/8" pipe |
| | | 131 ft of 1/2" pipe |

FLOORSACE REQUIREMENTS: 19' 8" x 18' EX. RES.



IDEAL FOR SHORT, BUSHY VARIETIES OR TALL-GROWING VINE PLANTS

PERFECT FOR LARGER PLANTS DURING INITIAL STAGES OF ADULT GROWTH

AVAILABLE WITH 2.2 GAL OR 3.9 GAL POTS - ALTERNATE YOUR CROPS AT WILL



MAXIMUM OUTPUT

easy2grow's phenomenally space-efficient two-pot module has been helping growers get the absolute maximum out of their available spaces for years. The systems are ideally suited to either short, bushy varieties like herbs or strawberries, or tall growing vine plants.

EARLY STAGES

With larger plants the systems can provide a perfect solution for initial stages of adult growth. The pots provide ample space in which young plants can thrive whilst AutoPot AQUAvalve technology ensures they are fed and watered exactly as and when required.

SCALABILITY

easy2grow is supplied with 2.2 gal pots as standard but is also available with 3.9 gal pots. A potentially infinite number of modules can be added to a system as and when required. These qualities make easy2grow ideal for alternating crops and for phased expansion.

E: INFO@AUTOPOT-USA.COM

 AUTOPOT-USA.COM

 [@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)



ALL SYSTEMS COMPLETE WITH PIPEWORK AND FITTINGS

FOR FLOORSPACE REQUIREMENTS SEE PAGES 20-21

MSRP - MANUFACTURERS SUGGESTED RETAIL PRICE



ASK US ABOUT UPGRADING TO A FLEXITANK PRO!



with 12.4 gal reservoir

EASY2GROW KIT - APWS111 MSRP \$140.99

WITH 3.9GAL POTS - APWS111L MSRP \$147.99



with 12.4 gal reservoir

EASY2GROW 4 - APWS112 MSRP \$231.99

WITH 3.9GAL POTS - APWS112L MSRP \$244.99



with 13 gal FlexiTank

EASY2GROW 6 - APWS113 MSRP \$316.99

WITH 3.9GAL POTS - APWS113L MSRP \$336.99



with 25 gal FlexiTank

EASY2GROW 12 - APWS114 MSRP \$596.99

WITH 3.9GAL POTS - APWS114L MSRP \$659.99



with 60 gal FlexiTank

EASY2GROW 16 - APWS115 MSRP \$787.99

WITH 3.9GAL POTS - APWS115L MSRP \$883.99



with 60 gal FlexiTank

EASY2GROW 20 - APWS116 MSRP \$930.99

WITH 3.9GAL POTS - APWS116L MSRP \$1,065.99



with 60 gal FlexiTank

EASY2GROW 24 - APWS117 MSRP \$1,101.99

WITH 3.9GAL POTS - APWS117L MSRP \$1,116.99



with 105 gal FlexiTank

EASY2GROW 40 - APWS118 MSRP \$1,908.99

WITH 3.9GAL POTS - APWS118L MSRP \$2,070.99



with 105 gal FlexiTank

EASY2GROW 48 - APWS119 MSRP \$2,293.99

WITH 3.9GAL POTS - APWS119L MSRP \$2,450.99



with 105 gal FlexiTank

EASY2GROW 60 - APWS120 MSRP \$2,588.99


WITH 3.9GAL POTS - APWS120L MSRP \$2,726.99



with 200 gal FlexiTank

EASY2GROW 80 - APWS121 MSRP \$3,015.99

WITH 3.9GAL POTS - APWS121L MSRP \$4,064.99

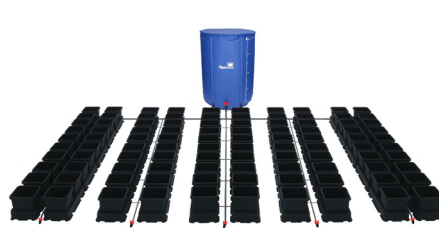

with 200 gal FlexiTank

EASY2GROW 100 - APWS122 MSRP \$4,673.99

WITH 3.9GAL POTS - APWS122L MSRP \$4,923.99




@AUTOPOTUSA




AUTOPOT-USA.COM




@AUTOPOTUSA



SYSTEM SPECIFICATIONS



EASY2GROW KIT - APWS111 (2.2 GAL) or APWS111L (3.9 GAL)*




CONTENTS

- 1x 3/8" inline tap
- 1x 12.4 gal reservoir & lid
- 1x 3/8" top hat grommet
- 1x 3/8" golf filter
- 1x 2Pot tray & lid
- 2x 2.2/3.9" gal pot
- 1x AQUAvalve5
- 5 ft of 3/8" pipe
- 2x root control disc
- 2x PotSock Square

FLOORSACE REQUIREMENTS: 2' 7" x 2' 7" EX. RES.

EASY2GROW 4 (4 POTS) - APWS112 (2.2 GAL) or APWS112L (3.9 GAL)*




CONTENTS

- 2x 3/8" inline tap
- 1x 12.4 gal reservoir & lid
- 1x 3/8" top hat grommet
- 1x 3/8" golf filter
- 2x 2Pot tray & lid
- 4x 2.2/3.9" gal pot
- 2x 3/8" tee connector
- 2x AQUAvalve5
- 10 ft of 3/8" pipe
- 4x root control disc
- 4x PotSock Square

FLOORSACE REQUIREMENTS: 3' 3" x 3' 3" EX. RES.

EASY2GROW 6 (6 POTS) - APWS113 (2.2 GAL) or APWS113L (3.9 GAL)*

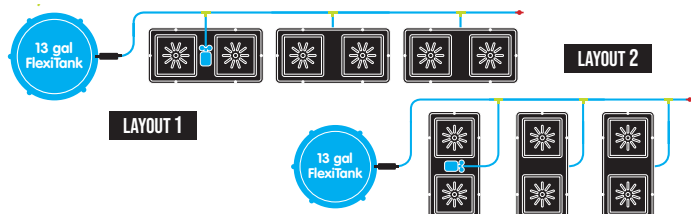


CONTENTS

- 1x 13 gal FlexiTank
- 6x 2.2/3.9" gal pot
- 3x 3/8" tee connector
- 6x root control disc
- 3x 2Pot tray & lid
- 1x 3/8" inline tap
- 13 ft of 3/8" pipe
- 1x 1/2-3/8" adapter/filter
- 3x AQUAvalve5
- 6x PotSock Square

FLOORSACE REQUIREMENTS: 4' x 4' EX. RES.

EASY2GROW 12 (12 POTS) - APWS114 (2.2 GAL) or APWS114L (3.9 GAL)*

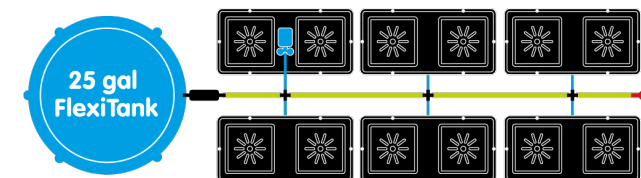


CONTENTS

- 1x 25 gal FlexiTank
- 12x 2.2/3.9" gal pot
- 3x 1/2-3/8" cross connector
- 12x PotSock Square
- 6x 2Pot tray & lid
- 1x 1/2" inline tap
- 10 ft of 3/8" pipe
- 1x 1/2" click-fit filter
- 6x AQUAvalve5
- 10 ft of 1/2" pipe
- 12x root control disc

FLOORSACE REQUIREMENTS: 3' 3" x 6' 6" EX. RES.

EASY2GROW 16 (16 POTS) - APWS115 (2.2 GAL) or APWS115L (3.9 GAL)*

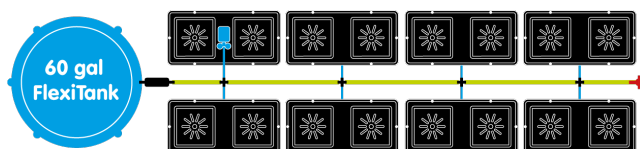


CONTENTS

- 1x 60 gal FlexiTank
- 16x 2.2/3.9" gal pot
- 4x 1/2-3/8" cross connector
- 16x PotSock Square
- 8x 2Pot tray & lid
- 1x 1/2" inline tap
- 13 ft of 3/8" pipe
- 16x root control disc
- 1x 1/2" click-fit filter
- 8x AQUAvalve5
- 13 ft of 1/2" pipe

FLOORSACE REQUIREMENTS: 8' 2" x 3' 3" EX. RES.

EASY2GROW 20 (20 POTS) - APWS116 (2.2 GAL) or APWS116L (3.9 GAL)*

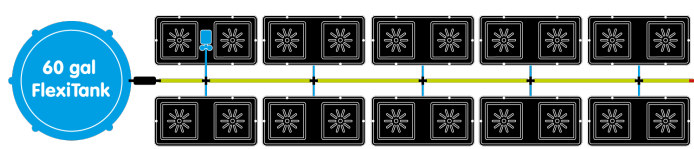


CONTENTS

- 1x 60 gal FlexiTank
- 20x 2.2/3.9" gal pot
- 5x 1/2-3/8" cross connector
- 20x PotSock Square
- 10x 2Pot tray & lid
- 1x 1/2" inline tap
- 20 ft of 3/8" pipe
- 20x root control disc
- 1x 1/2" click-fit filter
- 10x AQUAvalve5
- 20 ft of 1/2" pipe

FLOORSACE REQUIREMENTS: 11' 5" x 3' 3" EX. RES.

EASY2GROW 24 (24 POTS) - APWS117 (2.2 GAL) or APWS117L (3.9 GAL)*

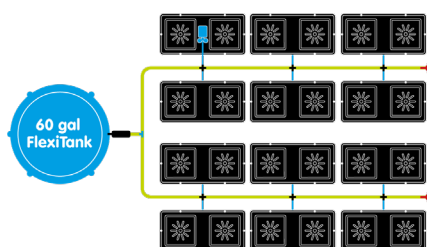


CONTENTS

- 1x 60 gal FlexiTank
- 24x 2.2/3.9" gal pot
- 1x 1/2" tee connector
- 26 ft of 1/2" pipe
- 12x 2Pot tray & lid
- 2x 1/2" inline tap
- 6x 1/2-3/8" cross connector
- 24x root control disc
- 1x 1/2" click-fit filter
- 12x AQUAvalve5
- 20 ft of 3/8" pipe
- 24x PotSock Square

FLOORSACE REQUIREMENTS: 8' 2" x 6' 6" EX. RES.

EASY2GROW 40 (40 POTS) - APWS118 (2.2 GAL) or APWS118L (3.9 GAL)*

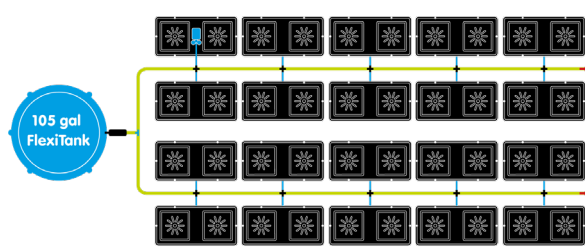

CONTENTS


- 1x 105 gal FlexiTank
- 40x 2.2/3.9" gal pot
- 1x 1/2" tee connector
- 32 ft of 1/2" pipe
- 20x 2Pot tray & lid
- 2x 1/2" inline tap
- 10x 1/2-3/8" cross connector
- 40x PotSock Square
- 1x 1/2" click-fit filter
- 20x AQUAvalve5
- 32 ft of 3/8" pipe
- 40x root control disc

FLOORSACE REQUIREMENTS: 8' 2" x 10' EX. RES.

E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM


@AUTOPOT_USA

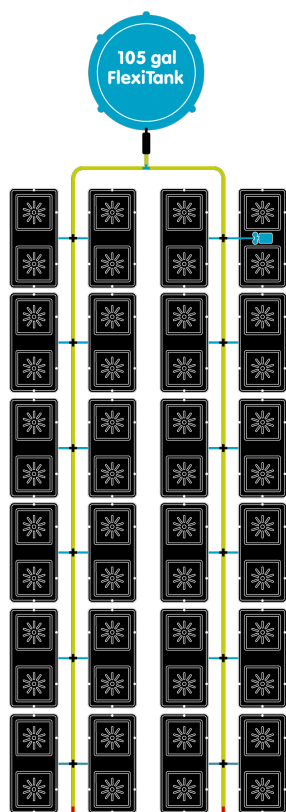**CONTENTS**

1x 105 gal FlexiTank
 24x 2Pot tray & lid
 1x 1/2" click-fit filter
 48x 2.2 gal pot
 2x 1/2" inline tap
 1x 1/2" tee connector
 24x AQUAvalve5
 12x 1/2-3/8" cross connector
 39 ft of 3/8" pipe
 39 ft of 1/2" pipe
 48x root control disc
 48x PotSock Square
 1x instruction sheet




FLOORSPACE REQUIREMENTS:
 16' 4" x 8' 2" EX. RES.

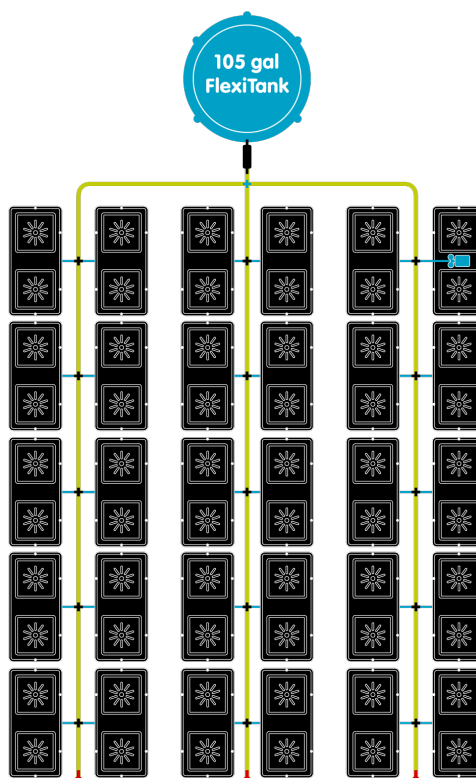**CONTENTS**

1x 105 gal FlexiTank
 30x 2Pot tray & lid
 1x 1/2" click-fit filter
 60x 2.2 gal pot
 3x 1/2" inline tap
 1x 1/2" cross connector
 30x AQUAvalve5
 15x 1/2-3/8" cross connector
 49 ft of 3/8" pipe
 49 ft of 1/2" pipe
 60x root control disc
 60x PotSock Square
 1x instruction sheet




FLOORSPACE REQUIREMENTS:
 11' 5" x 11' 5" EX. RES.

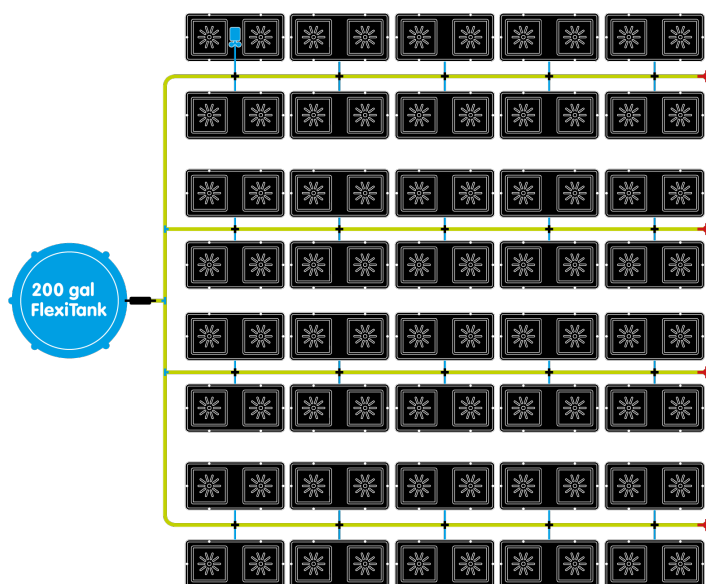**CONTENTS**

| | | |
|--------------------------|------------------------------|-----------------------|
| 1x 200 gal FlexiTank | 40x AQUAvalve5 | 80x PotSock Square |
| 40x 2Pot tray & lid | 3x 1/2" tee connector | 80x root control disc |
| 1x 1/2" click-fit filter | 20x 1/2-3/8" cross connector | 1x instruction sheet |
| 80x 2.2 gal pot | 75 ft of 3/8" pipe | |
| 4x 1/2" inline tap | 75 ft of 1/2" pipe | |




FLOORSPACE REQUIREMENTS: 13' x 16' 4" EX. RES.

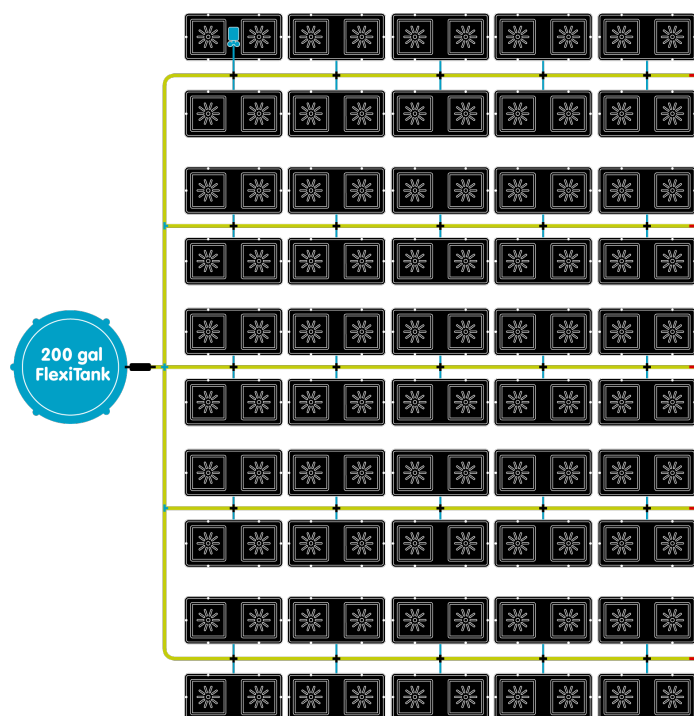**CONTENTS**

| | | |
|--------------------------|------------------------------|------------------------|
| 1x 200 gal FlexiTank | 50x AQUAvalve5 | 82 ft of 1/2" pipe |
| 50x 2Pot tray & lid | 2x 1/2" tee connector | 100x PotSock Square |
| 1x 1/2" click-fit filter | 1x 1/2" cross connector | 100x root control disc |
| 100x 2.2 gal pot | 25x 1/2-3/8" cross connector | 1x instruction sheet |
| 5x 1/2" inline tap | 82 ft of 3/8" pipe | |




FLOORSPACE REQUIREMENTS: 18' x 11' 5" EX. RES.

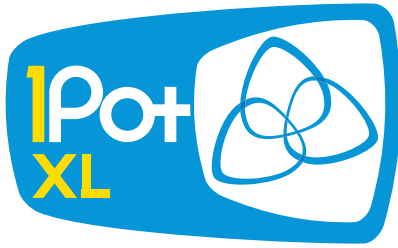

DEVELOPED BY AUTOPOT TO MEET THE DEMANDS OF THE AMBITIOUS GARDENER

FEATURING AN IMMENSE 6.6 GALLON GROWING CAPACITY

FOR GROWERS LOOKING TO CULTIVATE BIG PLANTS & ACHIEVE EVEN BIGGER YIELDS

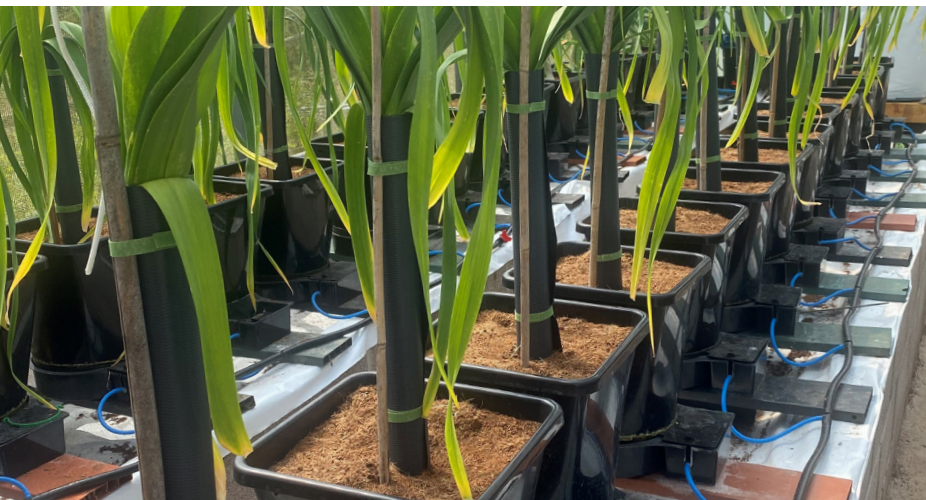

FLEXIBLE BY DESIGN

The round base and modular design means each 1Pot XL module can be rotated, repositioned or removed without difficulty or detrimental effects on the system. Such adjustability maximizes the efficiency of lighting arrangements at every stage of growth.

IMMENSE POT SIZE

A 6.6 gal pot means plants grow efficiently, continuously and vigorously. Plant development in the 1Pot XL module is unhindered by the need to transfer to a larger pot, such is the module's exceptional capacity.


PLANT HEALTH

Each module is fed by its own AQUAvalve, responding to the plant's needs and ensuring each plant can develop at its own rate - essential for the stock, specimen and mother plants with which commercial and hobby growers populate their greenhouses.

E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM

[@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)

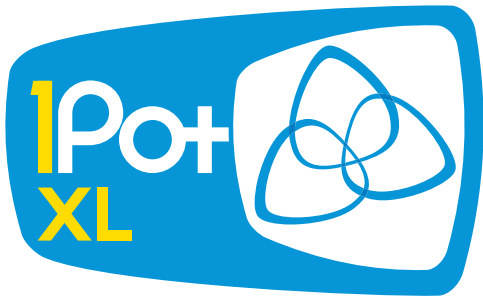

ALL SYSTEMS COMPLETE WITH PIPEWORK AND FITTINGS

FOR FLOORSPACE REQUIREMENTS SEE PAGES 24-25

MSRP - MANUFACTURERS SUGGESTED RETAIL PRICE



ASK US ABOUT UPGRADING TO A FLEXITANK PRO!



1POT XL SYSTEM - APWS156

with 12.4 gal reservoir

MSRP \$105.69



2POT XL SYSTEM - APWS157

with 12.4 gal reservoir

MSRP \$165.39



4POT XL SYSTEM - APWS158

with 12.4 gal reservoir

MSRP \$303.99



6POT XL SYSTEM - APWS159

with 25 gal FlexiTank

MSRP \$462.99



8POT XL SYSTEM - APWS161

with 25 gal FlexiTank

MSRP \$591.99



9POT XL SYSTEM - APWS182

with 25 gal FlexiTank

MSRP \$670.99



12POT XL SYSTEM - APWS162

with 60 gal FlexiTank

MSRP \$876.99



16POT XL SYSTEM - APWS169

with 60 gal FlexiTank

MSRP \$1,177.99



24POT XL SYSTEM - APWS163

with 105 gal FlexiTank

MSRP \$1,686.99



36POT XL SYSTEM - APWS164

with 105 gal FlexiTank

MSRP \$2,432.99



48POT XL SYSTEM - APWS165

with 105 gal FlexiTank

MSRP \$3,140.99



60POT XL SYSTEM - APWS166

with 105 gal FlexiTank

MSRP \$3,602.99



80POT XL SYSTEM - APWS167

MSRP \$4,747.99


with 200 gal FlexiTank



100POT XL SYSTEM - APWS168

MSRP \$5,804.99

with 200 gal FlexiTank

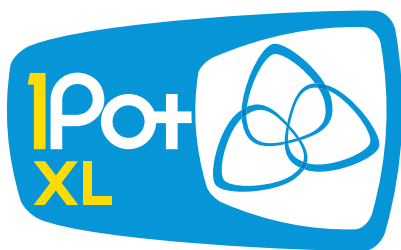


SYSTEM SPECIFICATIONS



- AQUAvalve5
- 3/8" Top Hat (TH) Grommet
- 3/8" pipe
- 3/8" Inline Tap
- 1/2" Click Fit Filter
- 3/8" Golf Filter
- 1/2" pipe
- 1/2" Inline Tap

- 1/2" Cross Connector
- 1/2-3/8" Cross Connector
- 3/8" Cross Connector
- 1/2" Tee Connector
- 1/2-3/8" Tee Connector
- 3/8" Tee Connector

1POTXL SYSTEM - APWS156




CONTENTS

- 1x 12.4 gal reservoir & lid
- 2x 3/8" TH grommet
- 1x 3/8" golf filter
- 1x 1Pot XL tray & lid
- 1x 6.6 gal pot
- 1x 3/8" inline tap
- 1x AQUAvalve5
- 5 ft of 3/8" pipe
- 1x XL root control disc
- 1x instruction sheet

FLOORSPEC REQUIREMENTS: 2' 7" x 2' 7" EX. RES.

2POTXL SYSTEM - APWS157




CONTENTS

- 1x 12.4 gal reservoir & lid
- 3x 3/8" TH grommet
- 1x 3/8" golf filter
- 2x 1Pot XL tray & lid
- 2x 6.6 gal pot
- 2x 3/8" inline tap
- 2x AQUAvalve5
- 1x 3/8" cross connector
- 6.6 ft of 3/8" pipe
- 2x XL root control disc
- 1x instruction sheet

FLOORSPEC REQUIREMENTS: 3' 3" x 3' 3" EX. RES.

4POTXL SYSTEM - APWS158

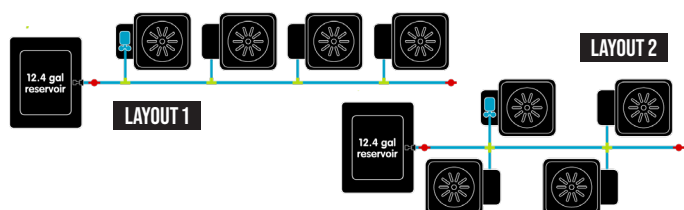


CONTENTS

- 1x 12.4 gal reservoir & lid
- 4x 1Pot XL tray & lid
- 5x 3/8" TH grommet
- 1x 3/8" golf filter
- 4x 6.6 gal pot
- 2x 3/8" inline tap
- 4x AQUAvalve5
- 2x 3/8" cross connector
- 4x 3/8" tee connector
- 13 ft of 3/8" pipe
- 4x XL root control disc
- 1x instruction sheet

FLOORSPEC REQUIREMENTS: 4' x 4' EX. RES.

6POTXL SYSTEM - APWS159

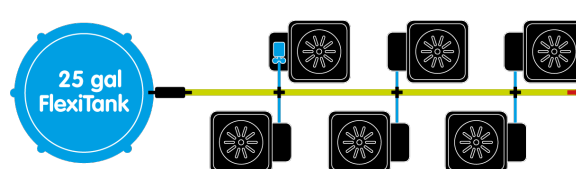


CONTENTS

- 1x 25 gal FlexiTank
- 6x 1Pot XL tray & lid
- 1x 1/2" click-fit filter
- 6x 3/8" TH grommet
- 6x 6.6 gal pot
- 1x 1/2" inline tap
- 6x AQUAvalve5
- 3x 1/2-3/8" cross connector
- 10 ft of 3/8" pipe
- 10 ft of 1/2" pipe
- 6x XL root control disc
- 1x instruction sheet

FLOORSPEC REQUIREMENTS: 5' x 6' 6" EX. RES.

8POTXL SYSTEM - APWS161




CONTENTS

- 1x 25 gal FlexiTank
- 8x 1Pot XL tray & lid
- 1x 1/2" click-fit filter
- 8x 3/8" TH grommet
- 8x 6.6 gal pot
- 1x 1/2" inline tap
- 8x AQUAvalve5
- 4x 1/2-3/8" cross connector
- 13 ft of 3/8" pipe
- 8x XL root control disc
- 1x instruction sheet

FLOORSPEC REQUIREMENTS: 5' x 10' EX. RES.

9POTXL SYSTEM - APWS182

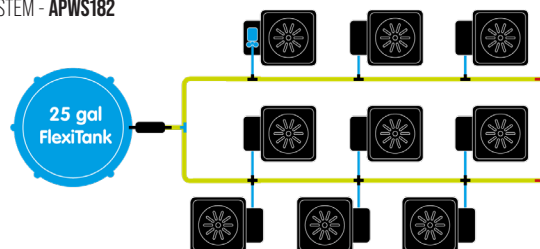


CONTENTS

- 1x 25 gal FlexiTank
- 9x 1Pot XL tray & lid
- 1x 1/2" click-fit filter
- 9x 6.6 gal pot
- 9x 3/8" TH grommet
- 2x 1/2" inline tap
- 9x AQUAvalve5
- 3x 1/2-3/8" cross connector
- 15 ft of 3/8" pipe
- 20 ft of 1/2" pipe
- 9x XL root control disc
- 1x instruction sheet

FLOORSPEC REQUIREMENTS: 6' 6" x 6' 6" EX. RES.

12POTXL SYSTEM - APWS162

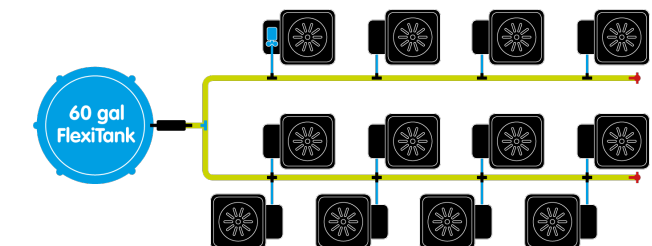


CONTENTS

- 1x 60 gal FlexiTank
- 12x 1Pot XL tray & lid
- 1x 1/2" click-fit filter
- 12x 6.6 gal pot
- 12x 3/8" TH grommet
- 2x 1/2" inline tap
- 12x AQUAvalve5
- 1x 1/2" tee connector
- 4x 1/2-3/8" cross connector
- 4x 1/2-3/8" tee connector
- 20 ft of 3/8" pipe
- 26 ft of 1/2" pipe
- 12x XL root control disc
- 1x instruction sheet

FLOORSPEC REQUIREMENTS: 6' 6" x 10' EX. RES.

16POTXL SYSTEM - APWS169

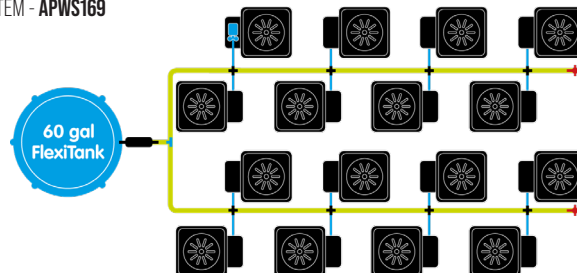

CONTENTS


- 1x 60 gal FlexiTank
- 16x 1Pot XL tray & lid
- 1x 1/2" click-fit filter
- 16x 3/8" TH grommet
- 16x 6.6 gal pot
- 2x 1/2" inline tap
- 16x AQUAvalve5
- 1x 1/2" tee connector
- 8x 1/2-3/8" cross connector
- 26 ft of 3/8" pipe
- 26 ft of 1/2" pipe
- 16x XL root control disc
- 1x instruction sheet

FLOORSPEC REQUIREMENTS: 8' 2" x 11' 6" EX. RES.


E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM


@AUTOPOT_USA

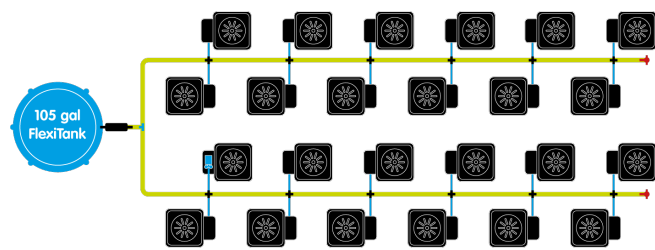**CONTENTS**


| | | |
|--------------------------|------------------------------|--------------------------|
| 1x 105 gal FlexiTank | 24x 3/8" TH grommet | 24x AQUAvalve5 |
| 24x 1Pot XL tray & lid | 1x 1/2" tee connector | 24x XL root control disc |
| 1x 1/2" click-fit filter | 12x 1/2-3/8" cross connector | 39 ft of 3/8" pipe |
| 2x 1/2" inline tap | 24x 6.6 gal pot | 32 ft of 1/2" pipe |
| | | 1x instruction sheet |

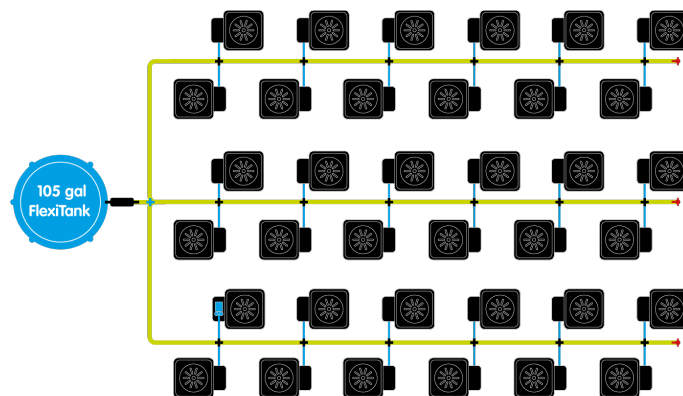FLOORSACE REQUIREMENTS: 11' 5" x 11' 5" EX. RES.**CONTENTS**


| | | |
|--------------------------|------------------------------|--------------------------|
| 1x 105 gal FlexiTank | 36x 3/8" TH grommet | 36x AQUAvalve5 |
| 36x 1Pot XL tray & lid | 1x 1/2" cross connector | 36x XL root control disc |
| 1x 1/2" click-fit filter | 18x 1/2-3/8" cross connector | 59 ft of 3/8" pipe |
| 3x 1/2" inline tap | 36x 6.6 gal pot | 49 ft of 1/2" pipe |
| | | 1x instruction sheet |

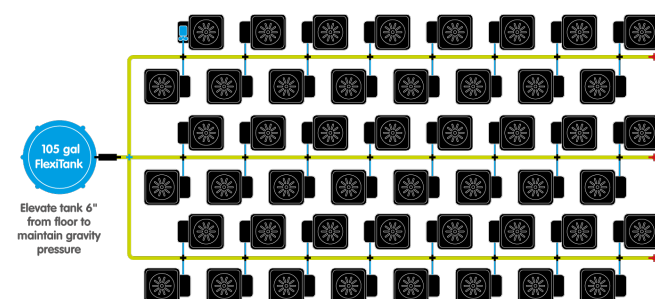FLOORSACE REQUIREMENTS: 11' 5" x 16' 5" EX. RES**CONTENTS**


| | | |
|--------------------------|------------------------------|--------------------------|
| 1x 105 gal FlexiTank | 48x 3/8" TH grommet | 48x AQUAvalve5 |
| 48x 1Pot XL tray & lid | 1x 1/2" cross connector | 48x XL root control disc |
| 1x 1/2" click-fit filter | 24x 1/2-3/8" cross connector | 78 ft of 3/8" pipe |
| 3x 1/2" inline tap | 48x 6.6 gal pot | 75 ft of 1/2" pipe |
| | | 1x instruction sheet |

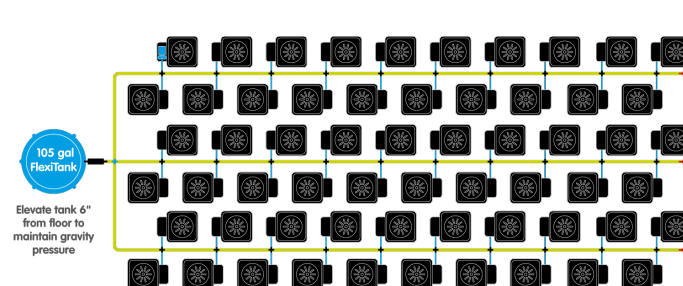FLOORSACE REQUIREMENTS: 16' 5" x 16' 5" EX. RES.**CONTENTS**

| | | |
|--------------------------|------------------------------|--------------------------|
| 1x 105 gal FlexiTank | 60x 3/8" TH grommet | 60x AQUAvalve5 |
| 60x 1Pot XL tray & lid | 1x 1/2" cross connector | 60x XL root control disc |
| 1x 1/2" click-fit filter | 30x 1/2-3/8" cross connector | 98 ft of 3/8" pipe |
| 3x 1/2" inline tap | 60x 6.6 gal pot | 82 ft of 1/2" pipe |
| | | 1x instruction sheet |

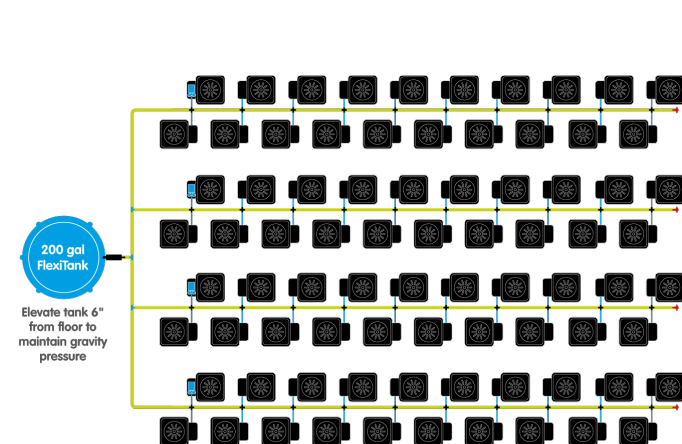FLOORSACE REQUIREMENTS: 23' 1" x 14' 9" EX. RES.**CONTENTS**

| | | |
|--------------------------|------------------------------|--------------------------|
| 1x 200 gal FlexiTank | 80x 3/8" TH grommet | 80x AQUAvalve5 |
| 80x 1Pot XL tray & lid | 3x 1/2" tee connector | 80x XL root control disc |
| 1x 1/2" click-fit filter | 40x 1/2-3/8" cross connector | 131 ft of 3/8" pipe |
| 4x 1/2" inline tap | 80x 6.6 gal pot | 98 ft of 1/2" pipe |
| | | 1x instruction sheet |

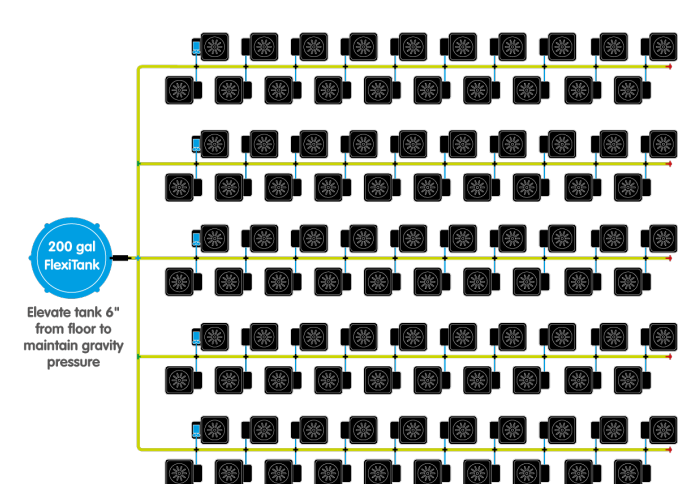FLOORSACE REQUIREMENTS: 21' 4" x 19' 8" EX. RES.**CONTENTS**

| | | |
|--------------------------|------------------------------|---------------------------|
| 1x 200 gal FlexiTank | 100x 3/8" TH grommet | 100x 6.6 gal pot |
| 100x 1Pot XL tray & lid | 2x 1/2" tee connector | 100x AQUAvalve5 |
| 1x 1/2" click-fit filter | 1x 1/2" cross connector | 100x XL root control disc |
| 5x 1/2" inline tap | 50x 1/2-3/8" cross connector | 164 ft of 3/8" pipe |
| | | 131 ft of 1/2" pipe |
| | | 1x instruction sheet |

FLOORSACE REQUIREMENTS: 21' 4" x 21' 4" EX. RES



GROW IN FABRIC WITH AUTOPOT & THE INNOVATIVE, MARKET-LEADING GEOPOT

GET BIGGER, STRONGER, FASTER GROWING PLANTS

FOR AIR-PRUNING, ZERO ROOT-CIRCLING & INCREASED OXYGENATION OF ROOT ZONE



G-LITE BY GEOPOT

AutoPot XL GeoPot modules take the immense capacity and versatility of the 1Pot XL tray and incorporate the innovative, market-leading fabric GeoPot. These 3 gal or 5 gal meavy metal free pots with handles are guaranteed against off-gassing or leaching and provide a uniquely rigid base to help keep plants upright.

E: INFO@AUTOPOT-USA.COM

BIGGER, STRONGER PLANTS, FAST

GeoPot's porous fabric sides mean air-pruning and zero root circling - giving you bigger plants from smaller pots. Increased secondary feeder roots vastly improve nutrient & water uptake. Increased oxygen exchange in the substrate helps to supercharge plant growth.

 **AUTOPOT-USA.COM**

EASY TO SHIP, SELL & STORE

XL GeoPot packs down 50% smaller and 50% lighter. This equates to huge reductions in shipping costs. The systems require less warehouse and shelf space and are easy for growers to transport and store. GeoPots are incredibly durable and can be reused repeatedly for years.

 **[@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)**



ALL SYSTEMS COMPLETE WITH PIPEWORK AND FITTINGS

FOR FLOORSPACE REQUIREMENTS SEE PAGES 28-29

MSRP - MANUFACTURERS SUGGESTED RETAIL PRICE

ASK US ABOUT UPGRADING TO A FLEXITANK PRO!



with 12.4 gal
reservoir

GEOPOT 1 (3 GAL) - GEOPOT1-3 MSRP \$102.99
WITH 5 GAL POTS - GEOPOT1-5 MSRP \$103.99



with 12.4 gal
reservoir

GEOPOT 2 (3 GAL) - GEOPOT2-3 MSRP \$166.99
WITH 5 GAL POTS - GEOPOT2-5 MSRP \$168.99



with 12.4 gal
reservoir

GEOPOT 4 (3 GAL) - GEOPOT4-3 MSRP \$291.99
WITH 5 GAL POTS - GEOPOT4-5 MSRP \$294.99




with 25 gal
FlexiTank

GEOPOT 6 (3 GAL) - GEOPOT6-3 MSRP \$448.99
WITH 5 GAL POTS - GEOPOT6-5 MSRP \$453.99



with 105 gal
FlexiTank

GEOPOT 8 (3 GAL) - GEOPOT8-3 MSRP \$570.99
WITH 5 GAL POTS - GEOPOT8-5 MSRP \$576.99



with 105 gal
FlexiTank

GEOPOT 9 (3 GAL) - GEOPOT9-3 MSRP \$648.99
WITH 5 GAL POTS - GEOPOT9-5 MSRP \$656.99



with 105 gal
FlexiTank

GEOPOT 12 (3 GAL) - GEOPOT12-3 MSRP \$855.99
WITH 5 GAL POTS - GEOPOT12-5 MSRP \$864.99



with 105 gal
FlexiTank

GEOPOT 16 (3 GAL) - GEOPOT16-3 MSRP \$1,090.99
WITH 5 GAL POTS - GEOPOT16-5 MSRP \$1,102.99




with 105 gal FlexiTank

GEOPOT 24 (3 GAL) - GEOPOT24-3 MSRP \$1,607.99
WITH 5 GAL POTS - GEOPOT24-5 MSRP \$1,626.99




with 105 gal FlexiTank

GEOPOT 36 (3 GAL) - GEOPOT36-3 MSRP \$2,349.99
WITH 5 GAL POTS - GEOPOT36-5 MSRP \$2,377.99



with 105 gal FlexiTank

GEOPOT 48 (3 GAL) - GEOPOT48-3 MSRP \$3,078.99
WITH 5 GAL POTS - GEOPOT48-5 MSRP \$3,116.99




with 105 gal FlexiTank

GEOPOT 60 (3 GAL) - GEOPOT60-3 MSRP \$3,809.99
WITH 5 GAL POTS - GEOPOT60-5 MSRP \$3,857.99




with 200 gal FlexiTank

GEOPOT 80 (3 GAL) - GEOPOT80-3 MSRP \$5,075.99
WITH 5 GAL POTS - GEOPOT80-5 MSRP \$5,139.99

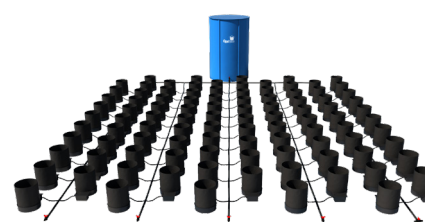

with 200 gal FlexiTank

GEOPOT 100 (3 GAL) - GEOPOT100-3 MSRP \$6,253.99
WITH 5 GAL POTS - GEOPOT100-5 MSRP \$6,333.99




SYSTEM SPECIFICATIONS




- AQUAvalve5
- 3/8" Top Hat Grommet
- 3/8" pipe
- 3/8" Inline Tap
- 1/2" Click Fit Filter
- 3/8" Golf Filter
- 1/2" pipe
- 1/2" Inline Tap

- 1/2" Cross Connector
- 1/2"-3/8" Cross Connector
- 3/8" Cross Connector
- 1/2" Tee Connector
- 1/2"-3/8" Tee Connector
- 3/8" Tee Connector


GeoPot 1 SYSTEM - GeoPot1-3 (3 GAL) or GeoPot1-5 (5 GAL)*

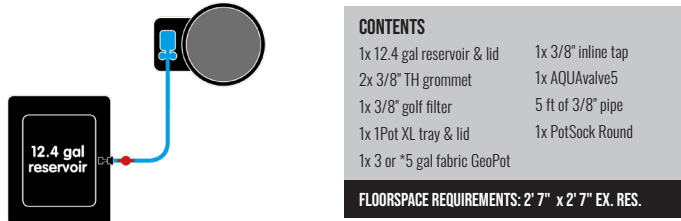


GeoPot 2 SYSTEM - GeoPot2-3 (3 GAL) or GeoPot2-5 (5 GAL)*

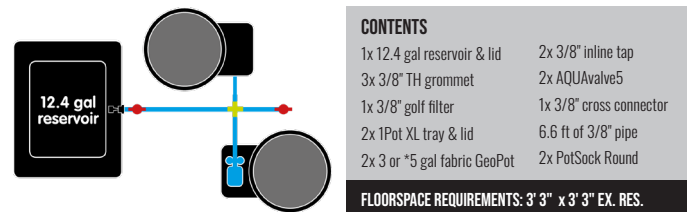


GeoPot 4 SYSTEM - GeoPot4-3 (3 GAL) or GeoPot4-5 (5 GAL)*

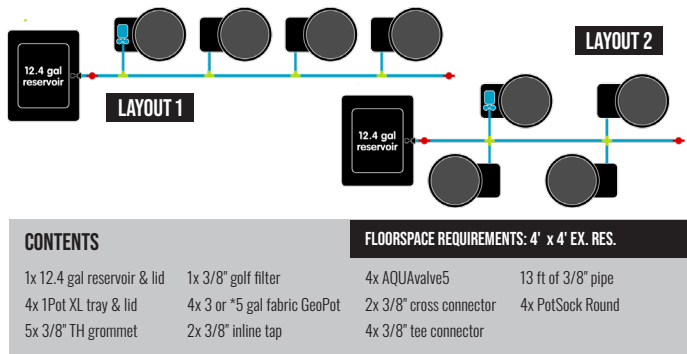


GeoPot 6 SYSTEM - GeoPot6-3 (3 GAL) or GeoPot6-5 (5 GAL)*

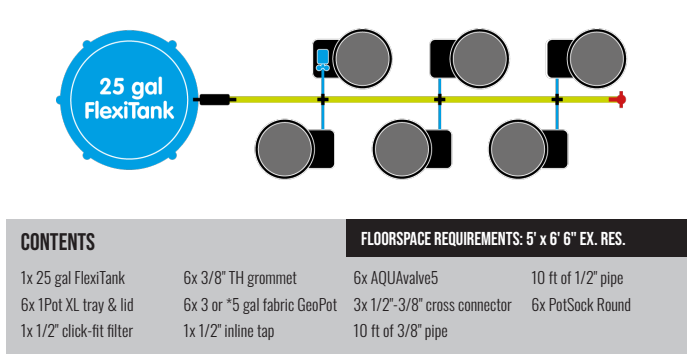


XL GeoPot 8 SYSTEM - GeoPot8-3 (3 GAL) or GeoPot8-5 (5 GAL)*

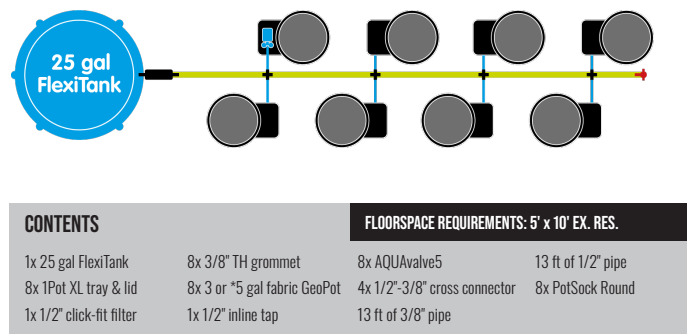


XL GeoPot 9 SYSTEM - GeoPot9-3 (3 GAL) or GeoPot9-5 (5 GAL)*

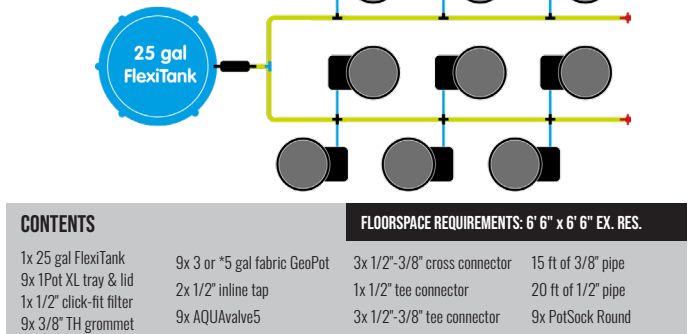


XL GeoPot 12 SYSTEM - GeoPot12-3 (3 GAL) or GeoPot12-5 (5 GAL)*

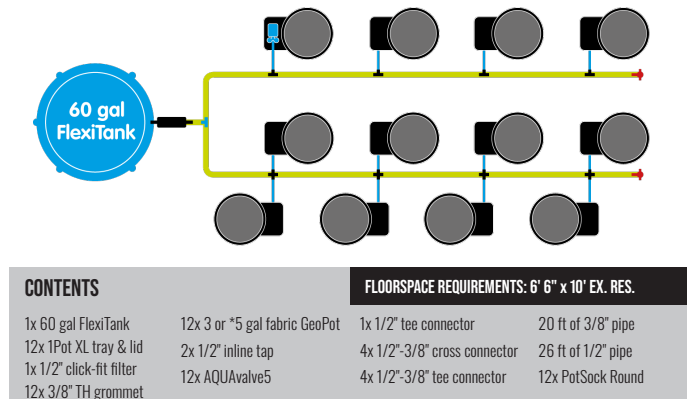

XL GeoPot 16 SYSTEM - GeoPot16-3 (3 GAL) or GeoPot16-5 (5 GAL)*

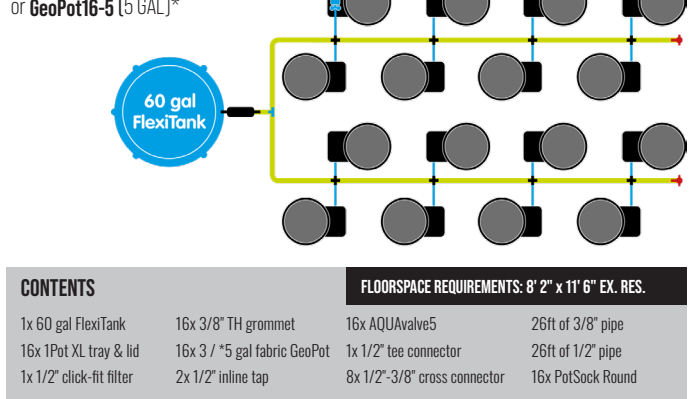


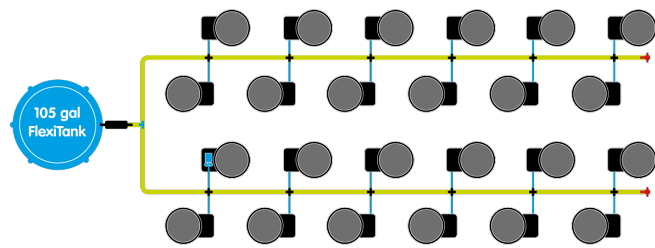

CONTENTS

| | | |
|--------------------------|-------------------------------|--------------------|
| 1x 105 gal FlexiTank | 24x 3/8" TH grommet | 24x AQUAvalve5 |
| 24x 1Pot XL tray & lid | 1x 1/2" tee connector | 24x PotSock Round |
| 1x 1/2" click-fit filter | 12x 1/2"-3/8" cross connector | 39 ft of 3/8" pipe |
| 2x 1/2" inline tap | 24x 3 or *5 gal fabric GeoPot | 32 ft of 1/2" pipe |



FLOORSACE REQUIREMENTS: 11' 6" x 11' 6" EX. RES.

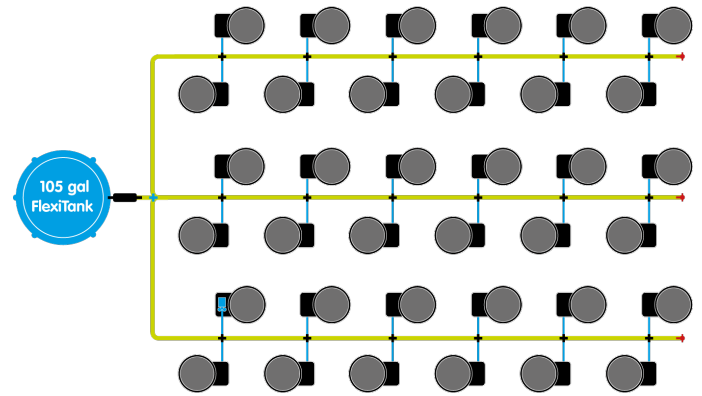

CONTENTS

| | | |
|--------------------------|-------------------------------|--------------------|
| 1x 105 gal FlexiTank | 36x 3/8" TH grommet | 36x AQUAvalve5 |
| 36x 1Pot XL tray & lid | 1x 1/2" cross connector | 36x PotSock Round |
| 1x 1/2" click-fit filter | 18x 1/2"-3/8" cross connector | 59 ft of 3/8" pipe |
| 3x 1/2" inline tap | 36x 3 or *5 gal fabric GeoPot | 49 ft of 1/2" pipe |


FLOORSACE REQUIREMENTS: 11' 6" x 11' 6" EX. RES.

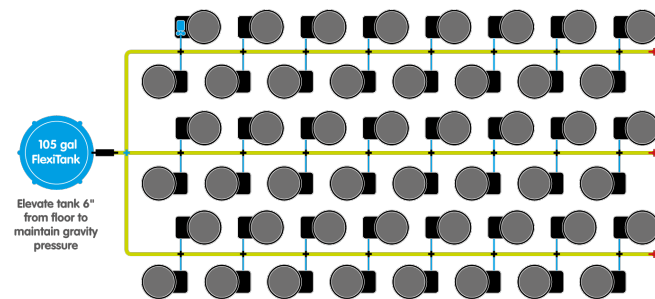

CONTENTS

| | | |
|--------------------------|-------------------------------|--------------------|
| 1x 105 gal FlexiTank | 48x 3/8" TH grommet | 48x AQUAvalve5 |
| 48x 1Pot XL tray & lid | 1x 1/2" cross connector | 48x PotSock Round |
| 1x 1/2" click-fit filter | 24x 1/2"-3/8" cross connector | 78 ft of 3/8" pipe |
| 3x 1/2" inline tap | 48x 3 or *5 gal fabric GeoPot | 75 ft of 1/2" pipe |


FLOORSACE REQUIREMENTS: 16' 5" x 16' 5" EX. RES.

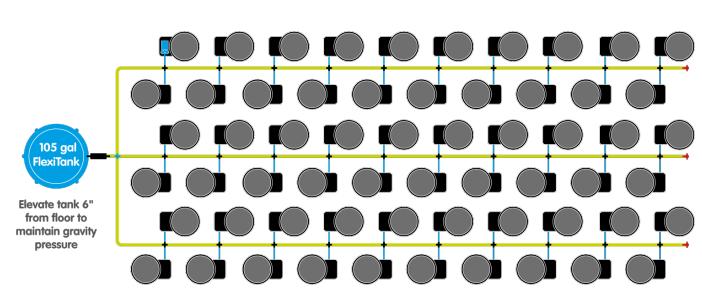

CONTENTS

| | | |
|--------------------------|-------------------------------|--------------------|
| 1x 105 gal FlexiTank | 60x 3/8" TH grommet | 60x AQUAvalve5 |
| 60x 1Pot XL tray & lid | 1x 1/2" cross connector | 60x PotSock Round |
| 1x 1/2" click-fit filter | 30x 1/2"-3/8" cross connector | 98 ft of 3/8" pipe |
| 3x 1/2" inline tap | 60x 3 or *5 gal fabric GeoPot | 82 ft of 1/2" pipe |


FLOORSACE REQUIREMENTS: 23' x 14' 9" EX. RES.

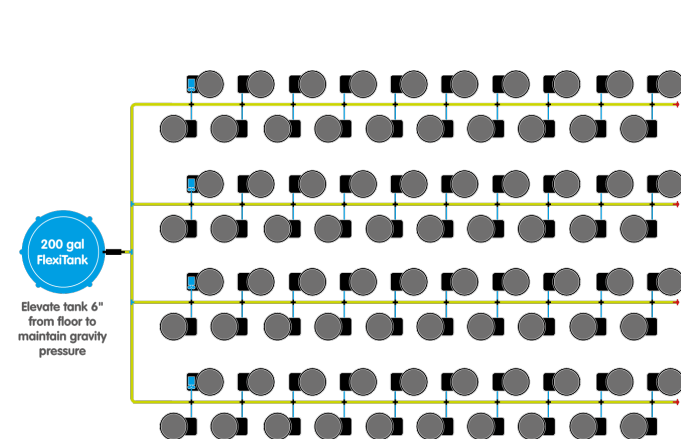

CONTENTS

| | | |
|--------------------------|-------------------------------|---------------------|
| 1x 200 gal FlexiTank | 80x 3/8" TH grommet | 80x AQUAvalve5 |
| 80x 1Pot XL tray & lid | 3x 1/2" tee connector | 80x PotSock Round |
| 1x 1/2" click-fit filter | 40x 1/2"-3/8" cross connector | 131 ft of 3/8" pipe |
| 4x 1/2" inline tap | 80x 3 or *5 gal fabric GeoPot | 98 ft of 1/2" pipe |

FLOORSACE REQUIREMENTS: 21' 4" x 19' 8" EX. RES.

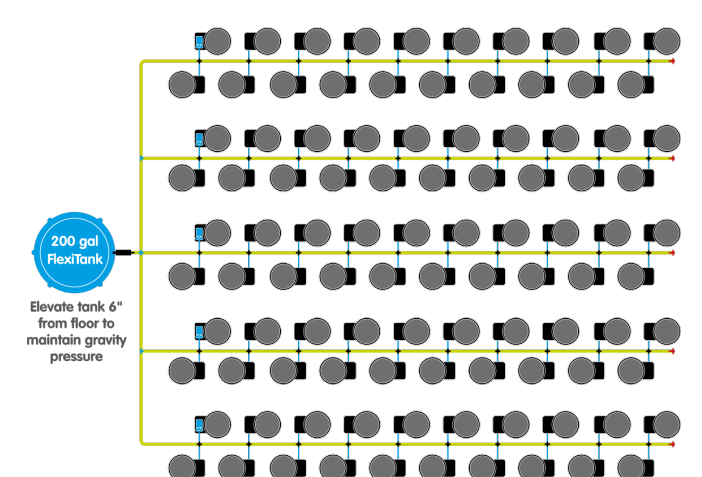


CONTENTS

| | | |
|--------------------------|-------------------------------|--------------------------------|
| 1x 200 gal FlexiTank | 100x 3/8" TH grommet | 100x 3 or *5 gal fabric GeoPot |
| 100x 1Pot XL tray & lid | 2x 1/2" tee connector | 100x AQUAvalve5 |
| 1x 1/2" click-fit filter | 1x 1/2" cross connector | 100x PotSock Round |
| 5x 1/2" inline tap | 50x 1/2"-3/8" cross connector | 164 ft of 3/8" pipe |
| | | 131 ft of 1/2" pipe |

FLOORSACE REQUIREMENTS: 21' 4" x 21' 4" EX. RES.



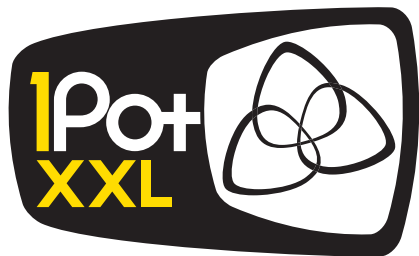

FOR THE BIGGEST, MOST FRUITFUL PLANTS IMAGINABLE

RESPONSIVE, POWER-FREE IRRIGATION & FEEDING FOR BIG PLANT GROWERS

SWITCH BETWEEN 9 GAL AND 13 GAL FABRIC POTS AT WILL



KNOW NO LIMITS

AutoPot XXL propels you into a new world of horticultural possibility, backed with technology that's proven to make the wildest, most fantastical, most fruitful plants a reality.

At last, a power-free watering system for 9 gal and 13 gal growers that truly satisfies the needs of their plants.

ADAPT TO ANYTHING

An ingenious enlargement of our ever-popular XL module, XXL accommodates 9 or 13 gal fabric pots. An adaptive collar even allows growers to switch between pot sizes as required whilst still using the same tray. XXL9 comes with BPA-free, Lead-free, fabric FlexiPots, XXL13 comes with identically specced 13 gal versions.



GROW WITH XXL

Cultivating big plants, whether one or many, requires time and technique. XXL brings ultra-low maintenance, plant-controlled AQUAvalve5 irrigation and feeding into the realm of giant growing - giving you the opportunity and head space to hone your horticultural skills.

E: INFO@AUTOPOT-USA.COM

 AUTOPOT-USA.COM

 [@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)

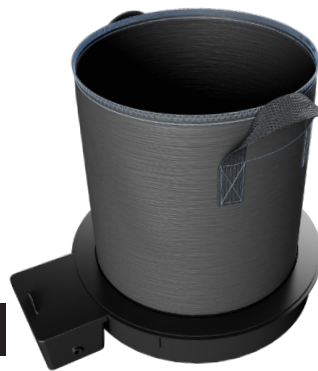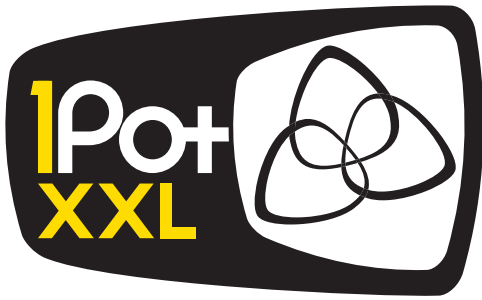


ALL SYSTEMS COMPLETE WITH PIPEWORK AND FITTINGS

FOR FLOORSPACE REQUIREMENTS SEE PAGES 32-33


MSRP - MANUFACTURERS SUGGESTED RETAIL PRICE

ASK US ABOUT UPGRADING TO A FLEXITANK PRO!




with 12.4 gal reservoir

1POT XXL9 - APWS356-9 MSRP \$147.59
1POT XXL13 - APWS356-13 MSRP \$147.29



with 12.4 gal reservoir

2POT XXL9 - APWS357-9 MSRP \$244.34
2POT XXL13 - APWS357-13 MSRP \$247.42



with 12.4 gal reservoir

4POT XXL9 - APWS358-9 MSRP \$435.49
4POT XXL13 - APWS358-13 MSRP \$441.66



with 25 gal FlexiTank

6POT XXL9 - APWS359-9 MSRP \$666.99
6POT XXL13 - APWS359-13 MSRP \$675.99



with 60 gal FlexiTank

8POT XXL9 - APWS361-9 MSRP \$853.99
8POT XXL13 - APWS361-13 MSRP \$866.99



with 60 gal FlexiTank

9POT XXL9 - APWS382-9 MSRP \$970.99
9POT XXL13 - APWS382-13 MSRP \$984.99



with 60 gal FlexiTank

12POT XXL9 - APWS362-9 MSRP \$1,281.99
12POT XXL13 - APWS362-13 MSRP \$1,299.99



with 60 gal FlexiTank

16POT XXL9 - APWS369-9 MSRP \$1,645.99
16POT XXL13 - APWS369-13 MSRP \$1,670.99



with 60 gal FlexiTank

24POT XXL9 - APWS363-9 MSRP \$2,434.99
24POT XXL13 - APWS363-13 MSRP \$2,471.99



with 105 gal FlexiTank

36POT XXL9 - APWS364-9 MSRP \$3,574.99
36POT XXL13 - APWS364-13 MSRP \$3,629.99



with 105 gal FlexiTank

48POT XXL9 - APWS365-9 MSRP \$4,698.99
48POT XXL13 - APWS365-13 MSRP \$4,772.99



with 105 gal FlexiTank

60POT XXL9 - APWS366-9 MSRP \$5,825.99
60POT XXL13 - APWS366-13 MSRP \$5,918.99




with 200 gal FlexiTank

80POT XXL9 - APWS367-9 MSRP \$7,762.99
80POT XXL13 - APWS367-13 MSRP \$7,885.99




with 200 gal FlexiTank

100POT XXL9 - APWS368-9 MSRP \$9,658.99
100POT XXL13 - APWS368-13 MSRP \$9,812.99

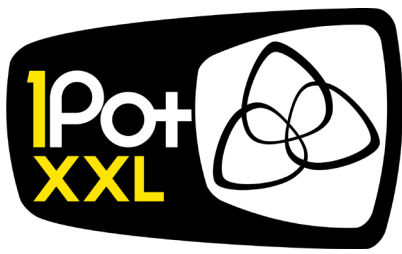

SYSTEM SPECIFICATIONS

- AQUAvalve5
- 3/8" Top Hat (TH) Grommet
- 3/8" pipe
- 3/8" Inline Tap
- 1/2" Click Fit Filter
- 3/8" Golf Filter
- 1/2" pipe
- 1/2" Inline Tap



- 1/2" Cross Connector
- 1/2" Tee Connector
- 1/2"-3/8" Cross Connector
- 1/2"-3/8" Tee Connector
- 3/8" Cross Connector
- 3/8" Tee Connector
- 1/4" Blanking Grommet

1POT XXL9 SYSTEM - APWS356-9 (9 GAL) or XXL13 SYSTEM (13 GAL)* - APWS356-13

CONTENTS

| | |
|----------------------------|--------------------------------|
| 1x 12.4gal reservoir & lid | 1x 1/4" blanking grommet |
| 1x XXL tray & lid | 1x AQUAvalve5 |
| 2x 3/8" TH grommet | 5ft of 3/8" pipe |
| 1x 3/8" golf filter | 1x PotSock Round |
| 1x 3/8" inline tap | 1x 9gal / *13gal fabric pot |
| | 1x adaptive collar (XXL9 only) |

FLOORSPEC REQUIREMENTS: 3' 3" x 3' 3" EX. RES.

2POT XXL9 SYSTEM - APWS357-9 (9 GAL) or XXL13 SYSTEM (13 GAL)* - APWS357-13

CONTENTS

| | |
|-----------------------------|--------------------------------|
| 1x 12.4 gal reservoir & lid | 1x 3/8" cross connector |
| 2x XXL tray & lid | 2x 1/4" blanking grommet |
| 3x 3/8" TH grommet | 6.6ft of 3/8" pipe |
| 1x 3/8" golf filter | 2x PotSock Round |
| 2x 3/8" inline tap | 2x 9gal / *13gal fabric pot |
| 2x AQUAvalve5 | 2x adaptive collar (XXL9 only) |

FLOORSPEC REQUIREMENTS: 5' 0" x 5' 0" EX. RES.

4POT XXL9 SYSTEM - APWS358-9 (9 GAL) or XXL13 SYSTEM (13 GAL)* - APWS358-13

CONTENTS

| | | | |
|----------------------------|-----------------------------|-------------------------|--------------------------------|
| 1x 12.4gal reservoir & lid | 1x 3/8" golf filter | 4x AQUAvalve5 | 4x PotSock Round |
| 4x XXL tray & lid | 4x 9gal / *13gal fabric pot | 2x 3/8" cross connector | 13ft of 3/8" pipe |
| 5x 3/8" TH grommet | 2x 3/8" inline tap | 4x 3/8" tee connector | 4x adaptive collar (XXL9 only) |
| 5x 1/4" blanking grommet | | | |

FLOORSPEC REQUIREMENTS: 6' 6" x 6' 6" EX. RES.

6POT XXL9 SYSTEM - APWS359-9 (9 GAL) or XXL13 SYSTEM (13 GAL)* - APWS359-13

CONTENTS

| | | | |
|--------------------------|-----------------------------|-----------------------------|--------------------------------|
| 1x 25 gal FlexiTank | 1x 1/2" click fit filter | 6x AQUAvalve5 | 10ft of 1/2" pipe |
| 6x XXL tray & lid | 6x 9gal / *13gal fabric pot | 3x 1/2-3/8" cross connector | 6x PotSock Round |
| 6x 3/8" TH grommet | 1x 1/2" inline tap | 10ft of 3/8" pipe | 6x adaptive collar (XXL9 only) |
| 6x 1/4" blanking grommet | | | |

FLOORSPEC REQUIREMENTS: 9' 9" x 6' 6" EX. RES.

8POT XXL9 SYSTEM - APWS361-9 (9 GAL) or XXL13 SYSTEM (13 GAL)* - APWS361-13

CONTENTS

| | | | |
|--------------------------|-----------------------------|-----------------------------|--------------------------------|
| 1x 25gal FlexiTank | 1x 1/2" click fit filter | 8x AQUAvalve5 | 13ft of 1/2" pipe |
| 8x XXL tray & lid | 8x 9gal / *13gal fabric pot | 4x 1/2-3/8" cross connector | 8x PotSock Round |
| 8x 3/8" TH grommet | 1x 1/2" inline tap | 13ft of 3/8" pipe | 8x adaptive collar (XXL9 only) |
| 8x 1/4" blanking grommet | | | |

FLOORSPEC REQUIREMENTS: 13' 2" x 6' 6" EX. RES.

9POT XXL9 SYSTEM - APWS382-9 (9 GAL) or XXL13 SYSTEM (13 GAL)* - APWS382-13

CONTENTS

| | | | |
|--------------------------|-----------------------------|--------------------------------|-------------------|
| 1x 25gal FlexiTank | 1x 1/2" click fit filter | 1x 1/2" tee connector | 15ft of 3/8" pipe |
| 9x XXL tray & lid | 9x 9gal / *13gal fabric pot | 3x 1/2-3/8" cross connector | 20ft of 1/2" pipe |
| 9x 3/8" TH grommet | 2x 1/2" inline tap | 3x 1/2-3/8" tee connector | 9x PotSock Round |
| 9x 1/4" blanking grommet | 9x AQUAvalve5 | 9x adaptive collar (XXL9 only) | |

FLOORSPEC REQUIREMENTS: 9' 9" x 9' 9" EX. RES.

12POT XXL9 SYSTEM - APWS362-9 (9 GAL) or XXL13 SYSTEM (13 GAL)* - APWS362-13

CONTENTS

| | | | |
|---------------------------|------------------------------|---------------------------------|-------------------|
| 1x 60gal FlexiTank | 1x 1/2" click fit filter | 1x 1/2" tee connector | 20ft of 3/8" pipe |
| 12x XXL tray & lid | 12x 9gal / *13gal fabric pot | 4x 1/2-3/8" cross connector | 26ft of 1/2" pipe |
| 12x 3/8" TH grommet | 2x 1/2" inline tap | 4x 1/2-3/8" tee connector | 12x PotSock Round |
| 12x 1/4" blanking grommet | 12x AQUAvalve5 | 12x adaptive collar (XXL9 only) | |


FLOORSPEC REQUIREMENTS: 13' 2" x 9' 9" EX. RES.

16POT XXL9 SYSTEM - APWS383-9 (9 GAL) or XXL13 SYSTEM (13 GAL)* - APWS383-13

CONTENTS

| | | | |
|----------------------------|---------------------------|---------------------------------|-------------------|
| 1x 60gal FlexiTank | 16x 3/8" TH grommet | 1x 1/2" tee connector | 26ft of 3/8" pipe |
| 16x XXL tray & lid | 16x 1/4" blanking grommet | 8x 1/2-3/8" cross connector | 26ft of 1/2" pipe |
| 1x 1/2" click-fit filter | 2x 1/2" inline tap | 16x adaptive collar (XXL9 only) | 16x PotSock Round |
| 16x 9gal/*13gal fabric pot | 16x AQUAvalve5 | | |


FLOORSPEC REQUIREMENTS: 13' 2" x 11' 5" EX. RES.

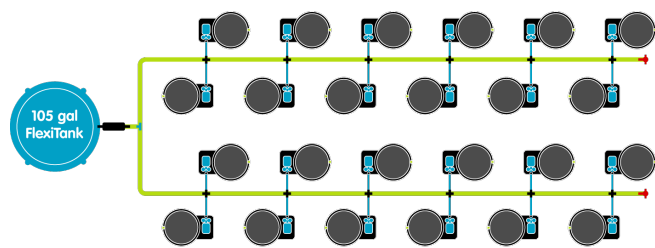

CONTENTS

| | | |
|--------------------------|------------------------------|---------------------------------|
| 1x 105gal FlexiTank | 24x 3/8" TH grommet | 24x 9gal/*13gal fabric pot |
| 24x XXL tray & lid | 24x 1/4" blanking grommet | 24x AQUAvalve5 |
| 1x 1/2" click-fit filter | 1x 3/8" tee connector | 24x PotSock Round |
| 2x 1/2" inline tap | 24x 1/2-3/8" cross connector | 39ft of 3/8" pipe |
| | | 32ft of 1/2" pipe |
| | | 24x adaptive collar (XXL9 only) |


FLOORSACE REQUIREMENTS: 29' 5" x 11' 5" EX. RES.

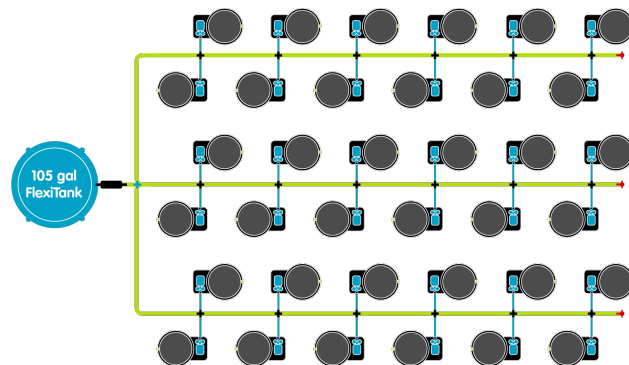

CONTENTS

| | | |
|--------------------------|------------------------------|---------------------------------|
| 1x 105gal FlexiTank | 36x 3/8" TH grommet | 36x 9gal / *13gal fabric pot |
| 36x XXL tray & lid | 36x 1/4" blanking grommet | 36x AQUAvalve5 |
| 1x 1/2" click-fit filter | 1x 1/2" cross connector | 36x PotSock Round |
| 3x 1/2" inline tap | 18x 1/2-3/8" cross connector | 59ft of 3/8" pipe |
| | | 49ft of 1/2" pipe |
| | | 36x adaptive collar (XXL9 only) |


FLOORSACE REQUIREMENTS: 29' 5" x 14' 8" EX. RES.

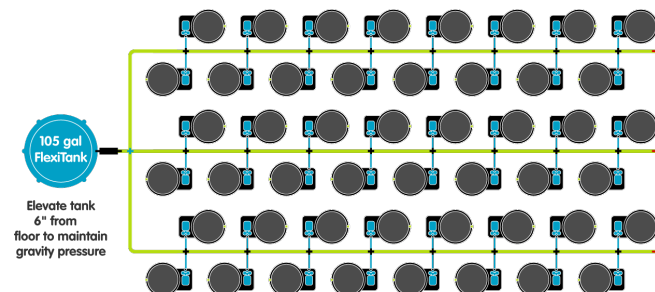

CONTENTS

| | | |
|--------------------------|------------------------------|---------------------------------|
| 1x 105gal FlexiTank | 48x 3/8" TH grommet | 48x 9gal/13gal* fabric pot |
| 48x XXL tray & lid | 48x 1/4" blanking grommet | 48x AQUAvalve5 |
| 1x 1/2" click-fit filter | 1x 1/2" cross connector | 48x PotSock Round |
| 3x 1/2" inline tap | 24x 1/2-3/8" cross connector | 78ft of 3/8" pipe |
| | | 75ft of 1/2" pipe |
| | | 48x adaptive collar (XXL9 only) |


FLOORSACE REQUIREMENTS: 39' 4" x 14' 8" EX. RES.

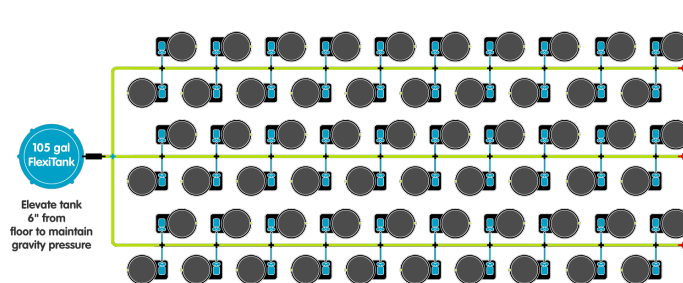

CONTENTS

| | | |
|--------------------------|------------------------------|---------------------------------|
| 1x 105gal FlexiTank | 60x 3/8" TH grommet | 60x 9gal / *13gal fabric pot |
| 60x XXL tray & lid | 60x 1/4" blanking grommet | 60x AQUAvalve5 |
| 1x 1/2" click-fit filter | 1x 1/2" cross connector | 60x PotSock Round |
| 3x 1/2" inline tap | 30x 1/2-3/8" cross connector | 98ft of 3/8" pipe |
| | | 82ft of 1/2" pipe |
| | | 60x adaptive collar (XXL9 only) |


FLOORSACE REQUIREMENTS: 49' 2" x 14' 8" EX. RES.

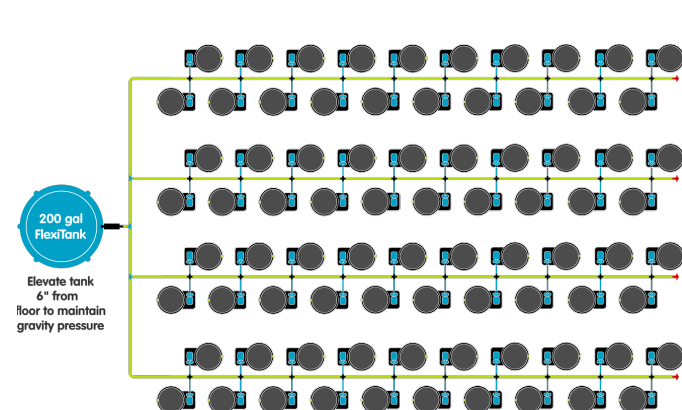

CONTENTS

| | | |
|--------------------------|------------------------------|---------------------------------|
| 1x 200gal FlexiTank | 80x 3/8" TH grommet | 80x 9gal / *13gal fabric pot |
| 80x XXL tray & lid | 80x 1/4" blanking grommet | 80x AQUAvalve5 |
| 1x 1/2" click-fit filter | 3x 1/2" tee connector | 80x PotSock Round |
| 4x 1/2" inline tap | 40x 1/2-3/8" cross connector | 131ft of 3/8" pipe |
| | | 98ft of 1/2" pipe |
| | | 80x adaptive collar (XXL9 only) |

FLOORSACE REQUIREMENTS: 49' 2" x 19' 7" EX. RES.

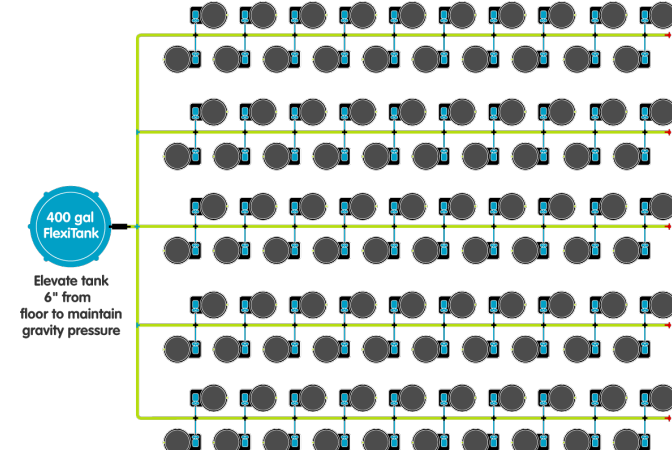


CONTENTS

| | | |
|--------------------------|------------------------------|----------------------------------|
| 1x 200gal FlexiTank | 100x 1/4" blanking grommet | 100x 9gal / *13gal fabric pot |
| 100x XXL tray & lid | 2x 1/2" tee connector | 100x PotSock Round |
| 1x 1/2" click-fit filter | 1x 1/2" cross connector | 164ft of 3/8" pipe |
| 5x 1/2" inline tap | 50x 1/2-3/8" cross connector | 131ft of 1/2" pipe |
| 100x 3/8" TH grommet | 100x AQUAvalve5 | 100x adaptive collar (XXL9 only) |

FLOORSACE REQUIREMENTS: 49' 2" x 24' 6" EX. RES.



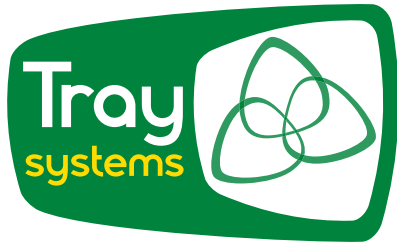

MAXIMIZE GROWING SPACE, MINIMIZE MAINTENANCE

MULTIPLE POTS IN A SINGLE TRAY & LID ASSEMBLY, ALL FED BY A SINGLE AQUAVALVE

TRAY SYSTEMS FOR EVERY STAGE OF ADULT PLANT GROWTH



GROWING SPACE

Irrigate multiple pots in a single tray and lid assembly, all fed by a single AQUAvalve5, radically reducing the footprint and system maintenance. Take advantage of all the space you have without the concern of accessing individual pots and trays. Ideal for tight spaces, rolling benches and vertical racking.

OVERHEADS

Tray systems irrigate with zero run-off so don't require plumbing for waste water and fewer lights are needed with plants arranged less loosely.

Fewer valves and fittings vastly reduces maintenance whilst the systems draw no more water than individual modules.

PLANT HEALTH

All our Tray Systems incorporate moulded bases to minimize standing water whilst the lid blocks light and debris from entering tray.

Use fabric pots with Auto XL GeoPot for air-pruning, zero root-circling and faster growing plants from smaller pots. Use 2.2 gal or 3.9 gal pots with Auto8 for maximum flexibility.

E: INFO@AUTOPOT-USA.COM

 **AUTOPOT-USA.COM**




 **@AUTOPOT_USA**



AUTO9XL6.6 MSRP \$479.99 >>

Auto9 XL Includes:

1x Auto9 XL tray & lid, 1x AQUAvalve5, 1x AQUAvalve cover,
1x Round blue access cover, 1x 3/8" top hat grommet,
3' 3" of 3/8" piping, 9x 6.6 gal XL plastic pot, 9x root control disc



<< AUTO9XLGP MSRP \$473.79

Auto9 XL GeoPot Includes:



1x Auto9 XL tray & lid, 1x AQUAvalve5, 1x AQUAvalve cover,
1x Round blue access cover, 1x 3/8" top hat grommet,
3' 3" of 3/8" piping, 9x 5 gal GeoPots, 9x PotSock Round



AUTO3XL6.6 MSRP \$223.39 >>

Auto3 XL Includes:

1x Auto3 XL tray & lid, 1x AQUAvalve5, 1x AQUAvalve cover,
1x Round blue access cover, 1x 3/8" top hat grommet,
3' 3" of 3/8" piping, 3x 6.6 gal XL plastic pot, 3x root control disc



<< AUTO3XLGP MSRP \$221.89

Auto3 XL GeoPot Includes:



1x Auto3 XL tray & lid, 1x AQUAvalve5, 1x AQUAvalve cover,
1x Round blue access cover, 1x 3/8" top hat grommet,
3' 3" of 3/8" piping, 3x 5 gal GeoPots, 3x PotSock Round



AUTO82.2 MSRP \$425.59 >>

Auto8 2.2 gal Includes:

1x Auto8 tray & lid, 1x AQUAvalve5, 1x AQUAvalve cover,
1x Round blue access cover, 1x 3/8" top hat grommet, 3' 3" of 3/8" piping,
8x 2.2 gal plastic pots, 8x root control disc (Square), 8x PotSock Square

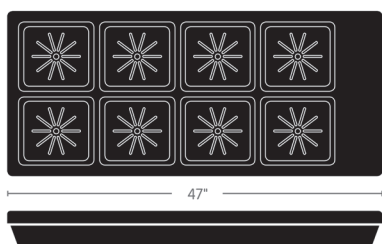

<< AUTO83.9 MSRP \$447.59

Auto8 3.9 gal Includes:

1x Auto8 tray & lid, 1x AQUAvalve5, 1x AQUAvalve cover,
1x Round blue access cover, 1x 3/8" top hat grommet, 3' 3" of 3/8" piping,
8x 3.9 gal plastic pots, 8x root control disc (Square), 8x PotSock Square

FOR RESERVOIRS SEE PAGES 48 - 51 & 54


MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE



MAXIMIZE GROWING SPACE WITH AUTO5 - FOR TRULY HUGE PLANTS

FEED UP TO FIVE 9 GAL FABRIC POTS WITH A SINGLE AQUAVALVE

FABRIC POTS SPEED PLANT DEVELOPMENT - GET GROWING FASTER




AUTO5XL9


MSRP \$410.19 >>

Includes:

1 x Auto5 Lid,
1 x 4 ft sq Garden Tray,
5 x 9 gal fabric FlexiPot,
1 x Round Blue Access Cover,
1 x AQUAvalve5,
1 x AQUAvalve Cover,
1 x AQUAvalve PotSock,
1 x Metal Plate for AQUAvalve PotSock,
1 x 3/8" Top Hat Grommet,
3' 3" of 3/8" Pipe, 1x Drill Template



Auto5 - for large plants in fabric pots, maximises available growing space and minimises maintenance thanks to a single AQUAvalve5

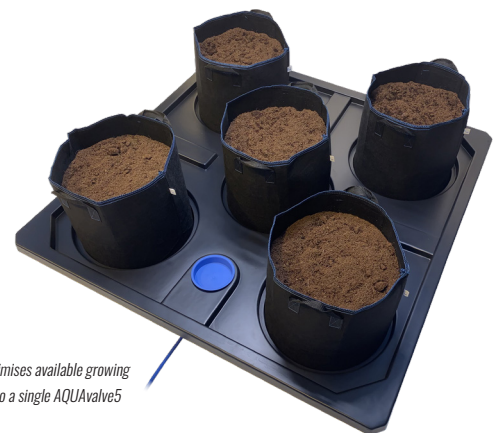

AUTO5 WITHOUT POTS

AUTO5NP

MSRP \$347.49

Includes:

1 x Auto5 Lid, 1 x 4 ft sq Garden Tray,
1 x Round Blue Access Cover, 1 x AQUAvalve5,
1 x AQUAvalve Cover, 1 x AQUAvalve PotSock,
1 x Metal Plate for AQUAvalve PotSock,
1 x 3/8" Top Hat Grommet, 3' 3" of 3/8" Pipe,
1x Drill Template



AUTO5 BASIC

AUTO5XL/UNIT

MSRP \$311.49

Includes:

1 x Auto5 Lid,
1 x 4 ft sq Garden Tray,
1 x Round Blue Access Cover
1x Drill Template

FOLLOW US FOR UPCOMING PRODUCT RELEASES

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM

@AUTOPOT_USA




g-Lite
by
geopot

AN EXPANDED RANGE OF FABRIC POTS FOR PLANTS OF ALL SIZES

INCLUDING 5 GAL POTS TO FIT OUR XL SYSTEM MODULES

9, 13, & 37 GAL POTS - FOR BIG, HEALTHY, FAST GROWING STOCK PLANTS

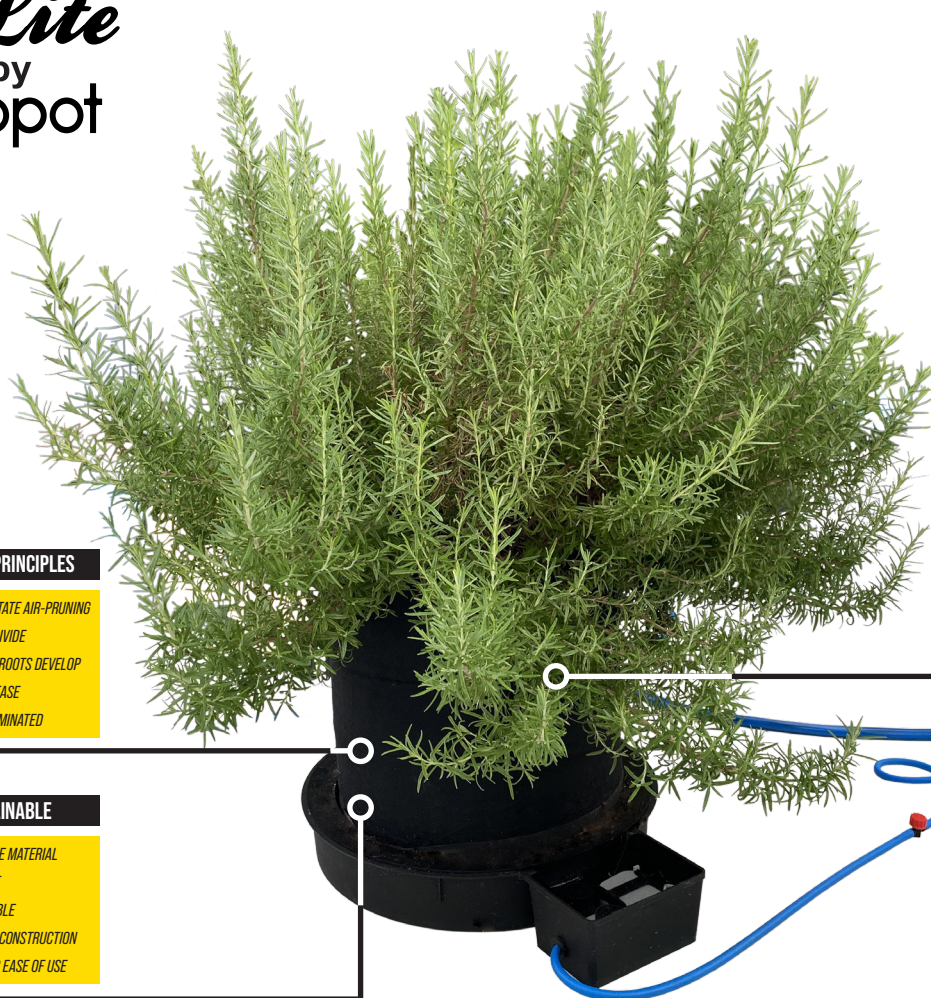

Left: Our expanded selection of FlexiPot fabric pots; helping you to grow bigger, stronger plants - faster.

ROOT TRAINING PRINCIPLES

- POROUS POTS FACILITATE AIR-PRUNING
- PRUNED ROOT TIPS DIVIDE
- SECONDARY FEEDER ROOTS DEVELOP
- UPTAKE RATES INCREASE
- ROOT CHASING IS ELIMINATED

SAFE & SUSTAINABLE


- BPA-FREE, LEAD-FREE MATERIAL
- MACHINE-WASHABLE
- EXTENSIVELY REUSABLE
- TOUGH, SUPPORTIVE CONSTRUCTION
- CARRY HANDLES FOR EASE OF USE

GROWTH STIMULATING FABRIC

- POROUS SIDES ALLOW OXYGEN IN
- OXYGENATED ROOT ZONE PRODUCES SUPERCHARGED GROWTH
- YOU GET BIGGER PLANTS, FROM SMALLER POTS, MORE QUICKLY

3 GAL GEOPOT - APWSGEOPOT3

MSRP \$5.99



Suitable for:
Auto3 & Auto9 - page 36
Garden trays - page 57
XL module trays - page 53

5 GAL GEOPOT - APWSGEOPOT5


MSRP \$6.99



Suitable for:
Auto3 & Auto9 - page 36
Garden trays - page 57
XL module trays - page 53

9 GAL FLEXIPOT - APWS9GFP


MSRP \$12.89



Suitable for:
Garden trays - page 57
XXL module trays - page 53

13 GAL FLEXIPOT - APWS13GFP


MSRP \$14.99



Suitable for:
Garden trays - page 57
XXL module trays - page 53

37 GAL FLEXIPOT - APWS37GFP

MSRP \$20.99



Suitable for:
Garden trays - page 57

FOR RESERVOIRS SEE PAGES 48 - 51 & 54

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE




ONE TRAY, FIVE USES - AUTOMATIC WATERING AT ITS VERSATILE BEST

ACCOMMODATES GROW BAGS, SEED TRAYS, MICRO HERBS, POTS & PLANTERS


SUITABLE FOR ALL PLANT TYPES, AT ALL STAGES OF GROWTH



Tray2Grow with grow bags

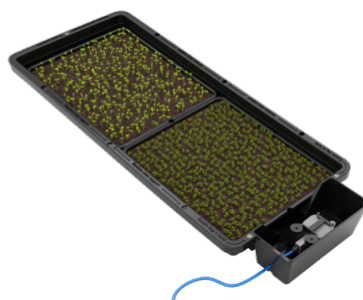

Tray2Grow with microherbs

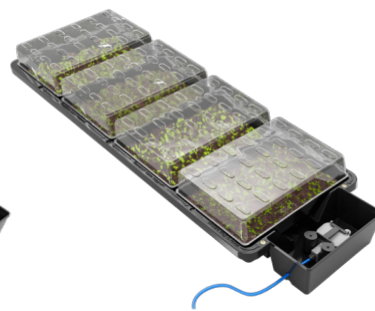

Tray2Grow with seed trays



Tray2Grow with pots



Tray2Grow with planters

VERSATILITY

Automatic watering at its versatile best, Tray2Grow offers gardeners a multitude of cultivation methods. From grow bags to seed trays, planters to coco slabs, pots to microherbs, Tray2Grow can be configured to suit every conceivable growth stage and every plant type.

INNOVATIVE IRRIGATION

Equipped for every eventuality, Tray2Grow includes optional capillary spikes that can be fitted to the inside of the tray. These pierce the underside of a grow bag, allowing you to irrigate the substrate within. Guide holes in the tray are provided for bamboo canes, allowing you to easily trellis your plants.

ALLOTMENT SCALE

With the spikes removed and capillary matting in place Tray2Grow can take up to four standard sized seed trays, two micro herb trays, two coco slabs, any number of bottom-perforated or bio pots, or our capacious 23.5 gallon framed fabric planter.

PART OF OUR NEW GARDEN CENTRE RANGE

WITH FULLY ILLUSTRATED RETAIL PACKAGING

E: INFO@AUTOPOT-USA.COM

 AUTOPOT-USA.COM

 [@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)



USE WITH CAPILLARY SPIKES TO IRRIGATE & FEED GROW BAGS

USE WITH CAPILLARY MATTING TO IRRIGATE & FEED POTS & TRAYS

TRAY2GROW PLANTER ALLOWS YOU TO GROW ROOT VEG ANYWHERE




Above: Tray2Grow Complete includes capillary matting for use with pots, trays, and planters, plus capillary spikes for use with grow bags.

« TRAY2GROW COMPLETE - APWS220

MSRP \$135.99

Includes:


- | | |
|--------------------------|--------------------------------|
| 1x Tray2Grow Tray & Lid | 3x Circular Spirit Level |
| 1x AQUAvalve5 | 10x Capillary Spikes |
| 2x 3/8" Grommet | 1x Capillary Matting |
| 1m of 3/8" Pipe | 1x Root Control Sheet |
| 16-3/8" Click-Fit Filter | 4x Seed Trays (lids not incl.) |
| 1x 3/8" Golf Filter | 1x Slug Repellent Copper Tape |
| 1x 6mm Overflow Grommet | |

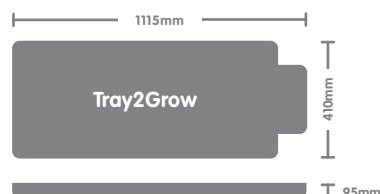

TRAY2GROW - TRAY & LID «

APWS223

MSRP \$38.99

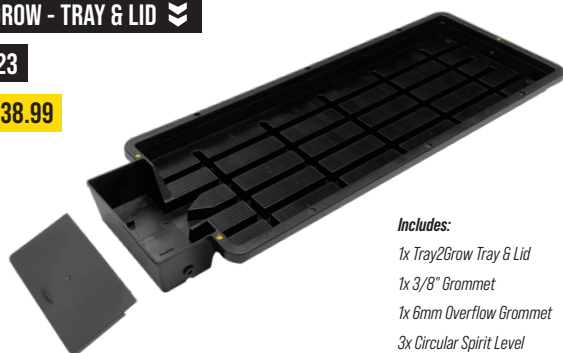

Includes:

- 1x Tray2Grow Tray & Lid
- 1x 3/8" Grommet
- 1x 6mm Overflow Grommet
- 3x Circular Spirit Level

TRAY2GROW PLANTER «

APWS231 «

AVAILABLE SPRING 2023

MSRP \$49.99



Grow root veg anywhere with Tray2Grow Planter - fully collapsible & washable

TRAY2GROW ACCESSORIES & SPARES




x10

« TRAY2GROW SPIKE & CAPILLARY

APWS228

MSRP \$16.99



« TRAY2GROW MICROHERB TRAY

APWS232

MSRP \$8.29



« TRAY2GROW ROOT CTRL SHEET

APWS224

MSRP \$9.79



x1

« TRAY2GROW SPIKE ONLY

APWS226


MSRP \$1.49



« TRAY2GROW SEED TRAY

APWS229

MSRP \$3.29



« TRAY2GROW CAPILLARY MAT

APWS225

MSRP \$17.99

FOR IN-EARTH IRRIGATION SEE PAGE 45

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE



@AUTOPOTUSA



AUTOPOT-USA.COM



@AUTOPOTUSA



MULTIPLY THE PLANT OUTPUT OF EVERY MODULE WITH POT DIVIDER

USE IN THE PRE-VEG STAGE TO SUB-DIVIDE 2.2 & 3.9 GAL POTS

EASY-TO-USE DESIGN ALLOWS PLANTS TO BE LIFTED OUT CLEANLY

POTDIVIDER FOR 2.2 GAL POTS - APWSPD

MSRP \$11.99




PotDivider 2.2 fits 2.2 gal pots as used in easy2grow and Auto8 systems



PotDivider 2.2 in easy2grow (top) and Auto8 (bottom) (modules not incl.)

POT DIVIDER FOR 3.9 GAL POTS - APWSPD-3.9

MSRP \$14.99

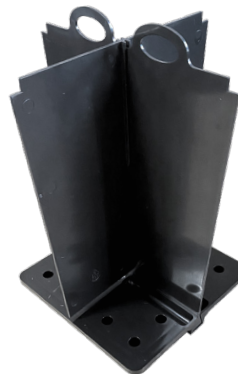

PotDivider 3.9 fits 3.9 gal pots as used in 1Pot, easy2grow, and Auto8 systems



PotDivider 3.9 in a 1Pot module (module not incl.)



PERFECT FOR GROWING STRAWBERRIES

DESIGNED TO FIT 2.2 GAL POTS - AS USED IN EASY2GROW

FOLIAGE GROWS UP, FRUITS HANG DOWN - EASY TO HARVEST

STRAWBERRY POT TOPPER

APPOTTOPPER/8.5

MSRP \$4.75

**Production items in black only*



For 2.2 gal pots & easy2grow modules see page 52



Strawberry toppers sit directly on the rim of 2.2 gal pots



Fill pots with media and lay strawberry plants side-on



Top strawberry plants off with a little extra media

FOLLOW US FOR UPCOMING PRODUCT RELEASES

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM

@AUTOPOT_USA

PROPAGATION LIDS & SYSTEMS

A FULL RANGE OF PROPAGATION LIDS TO COVER ALL POT SIZES

LIDS HELP CREATE HUMIDITY IN PLANTS MICRO-ENVIRONMENT

HUMIDITY HELPS TO STIMULATE GROWTH AT A CRITICAL STAGE



Listing incl. lid only

2.2 / 3.9 GAL PROPAGATION LID - APWSPROPLID

MSRP \$12.99



For 2.2 / 3.9 gal pots & easy2grow / 1Pot modules see page 52

2.2 / 3.9 gal Lid Dimensions: 10.4" W x 10.2" H

6.6 GAL PROPAGATION LID - APWSPROPLIDLXL

MSRP \$13.99



Listing incl. lid only

For XL modules & 6.6 gal pots see pages 52-53 - 6.6 gal Propagation Lid Dimensions: 12.5" W x 14" H

4POT PRO SYSTEM - APWS001PRO

MSRP \$399.89



4Pot Pro - Including propagation lids for essential humidity

CONTENTS

| | | | |
|-----------------------------|---------------------|-------------------------|----------------------|
| 1x 12.4 gal reservoir & lid | 1x 3/8" golf filter | 4x AQUAvalve5 | 4x Square AirBase |
| 4x 1Pot tray & lid | 4x 3.9 gal pot | 2x 3/8" cross connector | 4x AirDome Kit |
| 5x 3/8" top hat | 4x propagation lids | 4x 3/8" tee connector | 4x root control disc |
| grommet | 2x 3/8" inline tap | 13ft of 3/8" pipe | |

CREATING THE RIGHT MICRO ENVIRONMENT WITH PROPAGATION LIDS

1. LID ON WITH VENTS CLOSED



Keep the vents closed to create a micro environment. The lid helps to generate the humidity that young plants crave.

2. OPENING THE VENTS



As your plant increases in size half open the vents to release some humidity and temperature.

3. HARDENING OFF



Fully open vents to harden off your plant. Once vents are fully opened leave for several days prior to removal of the lid

FOR SEED / CUTTING PROPAGATION SEE PAGE 43

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

@AUTOPOTUSA

AUTOPOT-USA.COM

@AUTOPOTUSA



EASY2GO - APWS200-A5

MSRP \$39.99



TURN ANY GARDEN TRAY INTO AN AUTOPOT WATERING SYSTEM

USE IN THE HOME, GREENHOUSE, CONSERVATORY OR ON A BALCONY

KEEPS PLANTS WATERED AND FED FOR WEEKS - POWER FREE!



easy2GO - the endlessly adaptable kit that allows you to turn any flat tray into a watering system.

COCOMAT

THE IDEAL LOW-MAINTENANCE, NATURAL IRRIGATION SYSTEM

COCO FIBRES & NATURAL LATEX GENTLY WICK WATER & NUTRIENTS

FILL YOUR TRAY ONCE - COCOMAT WATERS FOR UP TO 10 DAYS



Fits all standard-sized propagation trays

COCOMAT BUNDLE- APWSCOCOPACK

MSRP \$19.99

Includes: 1x Root Control Sheet,
1x CocoMat 20" x 12" x 1.2"

1. PLACE COCOMAT AND ROOT CONTROL INTO A TRAY

2. FILL TRAY WITH WATER

3. PLACE SEED TRAY ON TOP AND GROW!



COCOMAT - APWSCOCO

MSRP \$23.99

Includes:
1x CocoMat 23" x 20" x 1.2"

SEE PAGES 10 - 11 FOR PROPAGATION TIPS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

E: INFO@AUTOPOT-USA.COM

 AUTOPOT-USA.COM

 @AUTOPOT_USA




ALL EASY2PROPAGATE KITS AND LIDS FULLY BOXED

ULTRA-STRONG LID EASY TO SHIP SINGLE UNITS

AVAILABLE IN FOUR DIFFERENT KIT CONFIGURATIONS

EASY2PROPAGATE COMPLETE KIT - APWS211


MSRP \$377.99

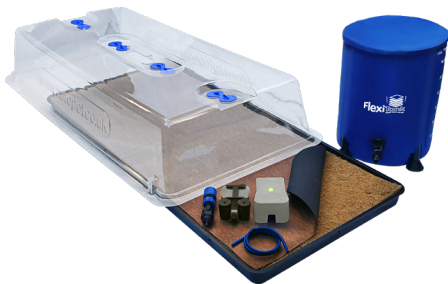

1x Clear easy2Propagate Lid with 4 x Fitted Vents, 1x 6.6 gal FlexiTank, 1x 1/2-3/8" Click-Fit Tank Adaptor & Filter, 1x AQUAvalve5, 1x AQUAvalve Cover, 5' of 3/8" piping, 1x 3/8" Elbow Bar, 1x Garden Tray, 2x Coco Matting 23" x 20" x 1.2", 1x Root Control Sheet 45.5" x 20"

EASY2PROPAGATE EXTENSION KIT - APWS212


MSRP \$315.29

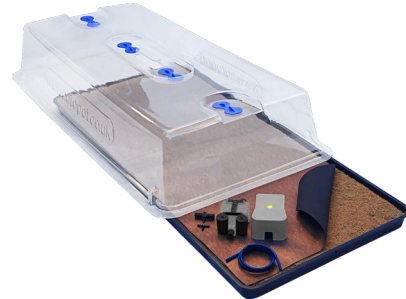

1x Clear easy2Propagate Lid with 4 x Fitted Vents, 1x AQUAvalve5, 1x AQUAvalve Cover, 1x 1/2-3/8" Tee Connector, 1x 3/8" Tee Connector, 1x 3/8" Elbow Bar, 3' 3" of 3/8" piping, 1x Garden Tray, 2x Coco Matting 23" x 20" x 1.2", 1x Root Control Sheet 45.5" x 20"

EASY2PROPAGATE BASIC KIT - APWS213

MSRP \$269.29

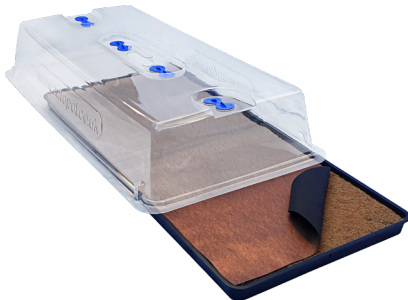

1x Clear easy2Propagate Lid with 4 x Fitted Vents, 1x Garden Tray, 2x Coco Matting 23" x 20" x 1.2", 1x Root Control Sheet 45.5" x 20"



EASY2PROPAGATE LID ONLY- APWS210

MSRP \$161.49



1x Clear easy2Propagate Lid with 4 x Fitted Vents
(Fits Garden Tray - not included in Lid Only option)

EASY2PROPAGATE DIMENSIONS

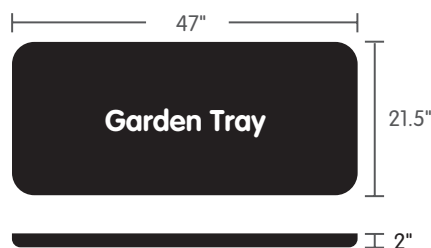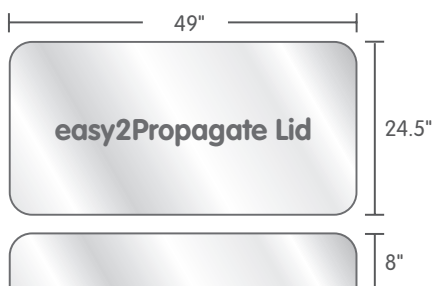

FOR RESERVOIRS SEE PAGES 48 - 51 & 54

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

@AUTOPOTUSA

AUTOPOT-USA.COM

@AUTOPOTUSA



FOR GROWING EVEN THE LARGEST OF PLANTS WITH AUTOPOT

NOW AVAILABLE AS A COMPLETE KIT - INCLUDING SKIRT, FITTINGS & TRAY

AVAILABLE FOR 2 X 2, 2.5 X 2.5 AND 3 X 3 SQ GARDEN TRAYS



PLANTSKIRT

AUTOSKIRT

MSRP \$31.99

Includes:

1x PlantSkirt for 30"-39.5" Trays

Fits a tray of 30"-39.5" sq.

Fits a pot with a max diameter of 27.5" Pot,
tray and substrate not included

With PlantSkirt the heat and light that would otherwise cause nutrient solution to evaporate is instead reflected back onto the plant - promoting growth



PLANTSKIRT - SMALL

AUTOSKIRTSM

MSRP \$28.69

Includes:

1x PlantSkirt for 24" Trays

Fits a tray of 24" sq.

Fits a pot with a max diameter of 15.5"
Pot, tray and substrate not included

AUTOSKIRTKIT w/2x2 TRAY & 9GAL FLEXIPOT - AUTOSKIRT2KIT

MSRP \$136.69



Includes:

1x PlantSkirt Small, 1x 9gal fabric FlexiPot, 1x 2ft x 2ft Garden Tray,
1x AQUAvalve PotSock, 1x AQUAvalve PotSock Plate, 1x AQUAvalve5,
1x AQUAvalve Cover, 3.3ft of 3/8" pipe, 1x 3/8" Elbow Bar, 1x 1/2"-3/8"
Tee Connector, 1x 1/2"-3/8" Cross Connector, 1x 3/8" Tee Connector

AUTOSKIRTKIT w/2.5x2.5 TRAY & 37GAL FLEXIPOT - AUTOSKIRT2.5KIT

MSRP \$178.99



Includes:

1x PlantSkirt, 1x 37 gal fabric FlexiPot, 1x 2.5ft x 2.5ft Garden Tray,
1x AQUAvalve PotSock, 1x AQUAvalve PotSock Plate, 1x AQUAvalve5,
1x AQUAvalve Cover, 3.3ft of 3/8" pipe, 1x 3/8" Elbow Bar, 1x 1/2"-3/8"
Tee Connector, 1x 1/2"-3/8" Cross Connector, 1x 3/8" Tee Connector

AUTOSKIRTKIT w/3x3 TRAY & 37GAL FLEXIPOT - AUTOSKIRT3KIT

MSRP \$205.79



Includes:

1x PlantSkirt, 1x 37 gal fabric FlexiPot, 1x 3ft x 3ft Garden Tray,
1x AQUAvalve PotSock, 1x AQUAvalve PotSock Plate, 1x AQUAvalve5,
1x AQUAvalve Cover, 3.3ft of 3/8" pipe, 1x 3/8" Elbow Bar, 1x 1/2"-3/8"
Tee Connector, 1x 1/2"-3/8" Cross Connector, 1x 3/8" Tee Connector

SETTING UP WITH PLANTSKIRT

1



Position pot centrally in tray.

Fill pot with medium and pot up plants.

Water through pot and allow to drain.

2



Place AQUAvalve PotSock and plate onto the tray.

Fit pipe and Elbow Bar to AQUAvalve and place into the AQUAvalve PotSock.

Connect the AQUAvalve up to your reservoir.

3



The PlantSkirt is secured around the middle of the pot and the outer rim of the tray.

Secure in place with the PlantSkirt's drawstrings.

4



Once the drawstrings are pulled tight the PlantSkirt provides an effective seal preventing light and debris from entering the tray.

SEE PAGE 57 FOR GARDEN TRAYS


FOR A WIDE RANGE OF FABRIC POTS SEE PAGE 37

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM

@AUTOPOT_USA

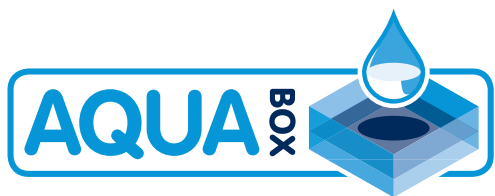

IDEAL FOR RAISED BEDS, LARGE PLANTERS, AND GROW BAGS


PLANTS ARE WATERED FOR DAYS OR WEEKS AT A TIME

CAPILLARY MATTING DISTRIBUTES WATER & FEED UNDER THE SOIL

AQUABOX STRAIGHT - PLANTERS & NARROW BEDS

AQUABOX STRAIGHT - APWS0018 **RRP \$52.99**


Includes: 1x AQUAbox Straight, 1x AQUAvalve5, 1x Circular spirit level, 1x 3/8" top hat grommet, 3.9ft of capillary matting, 6.5ft of 3/8" pipe, 1x 1/2-3/8" Click-Fit adapter & filter

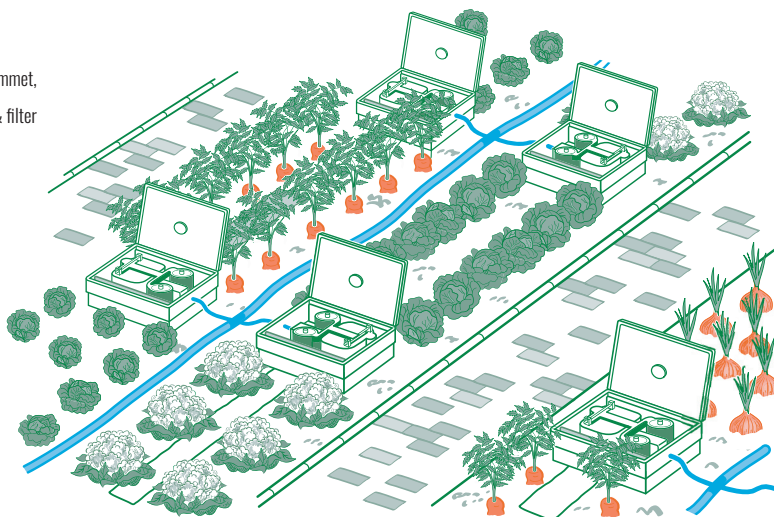

AQUABOX SPYDER - WIDE RAISED BEDS & ALLOTMENTS

AQUABOX SPYDER - APWS0016 **MSRP \$55.79**

Includes: 1x AQUAbox Spyder, 1x AQUAvalve5, 1x Circular spirit level, 1x 3/8" top hat grommet, 6.5ft of 3/8" pipe, 19.5ft of capillary matting, 1x 1/2-3/8" Click-Fit adapter & filter

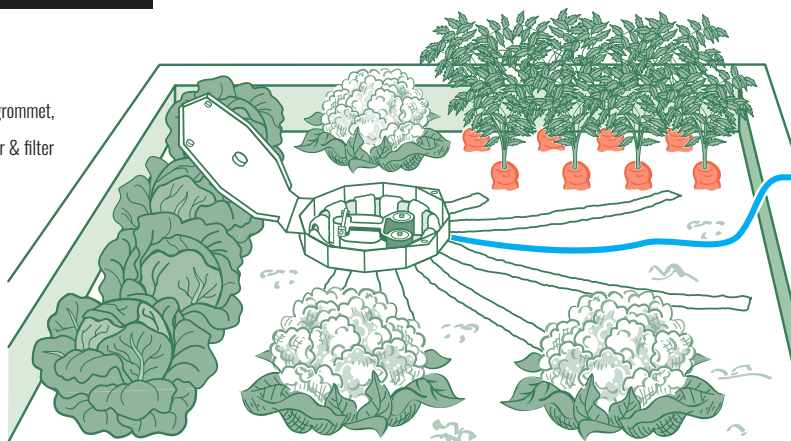

AQUABOX ACCESSORIES



AQUABOX STRAIGHT REPLACEMENT MATTING 3' 11" x 13/4"

APWS020

MSRP \$10.49



AQUABOX SPYDER REPLACEMENT MATTING 19' 8" x 3/5"

APWS0019

MSRP \$13.79


SEE OUR YOUTUBE CHANNEL FOR SET UP VIDEOS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

@AUTOPOTUSA

AUTOPOT-USA.COM

@AUTOPOTUSA

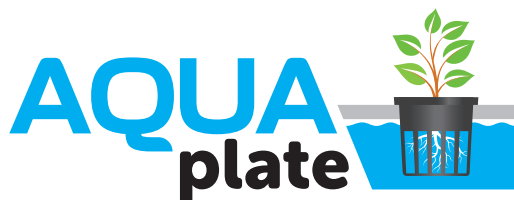

GROW FREE FROM SUBSTRATE WITH AUTOPOT

GIVE PLANTS DIRECT ROOT ACCESS TO NUTRIENT RICH WATER

ENCOURAGE FASTER, STRONGER ROOT DEVELOPMENT

AQUAPLATE SQUARE KIT - APWSAQUASQ

MSRP \$24.99

Includes: 1x AQUAplate Square, 5x Mesh Pots,
5x Neoprene Collars, 5x Foam Pads, 1x PotSock Square



AQUAplate Square fits easy2grow or 1Pot trays See page 53

AQUAPLATE CIRCLE KIT - APWSAQUACIR

MSRP \$29.49

Includes: 1x AQUAplate Circle, 5x Mesh Pots,
5x Neoprene Collars, 5x Foam Pads, 1x PotSock Round



AQUAplate Circle
fits 1Pot XL trays
See page 53



MESH POT FOR AQUAPLATE

AQUAPLATETEKUMGB

MSRP \$0.36



BLUE FOAM DISC FOR AQUAPLATE

AQUAPLATEFTT60PPI

MSRP \$0.62



NEOPRENE COLLAR FOR AQUAPLATE

AQUAPLATEFOAM50MM

MSRP \$0.74



BOOST GROWTH & YIELDS BY INCREASING OXYGEN CONTENT IN THE POT

GET A HEALTHIER ROOT ZONE & GREATER NUTRIENT UPTAKE

TAKES LESS THAN 30 SECONDS TO ASSEMBLE

AIRDOME COMPLETE - APWS090

RWP \$5.09 - MSRP \$11.69



Includes: 1x AirDome body, 1/4" straight connector,
1x 1/4" cross connector, 4x pieces of blue bubble
pipe, 3' 3" length of black airline, 1x full instructions

AIRDOME BODY ONLY APWS091

MSRP \$3.59



BUBBLE PIPE FOR AIRDOME APWS092

MSRP \$0.68



AIRDOME QUICK CONNECT APWS097

MSRP \$5.99



AirDome Tips:

- » When selecting an air pump AutoPot recommend utilizing 15gph/dome
- » To maximize the effectiveness of the AirDome use a 'fluffy' mix, such as 50% good quality compost and 50% perlite.
- » Avoid peat based compost as this will compress, reducing the AirDome's effectiveness.
- » Never blow cold air into the root zone, only warm air.

SEE PAGE 53 FOR OUR RANGE OF MODULE TRAYS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM

@AUTOPOT_USA




OPTIMISES ROOT ZONE DRAINAGE IN AUTOPOT WATERING SYSTEMS

REMOVES THE NEED FOR A PEBBLE LAYER IN THE BASE OF YOUR POT

DESIGNED FOR EASY, OPTIONAL INTEGRATION WITH AIRDOME

AIRBASE SQUARE - APWS0095

MSRP \$10.49

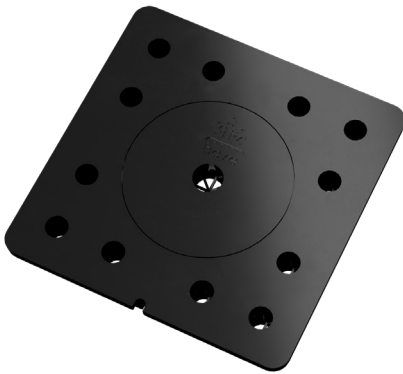

AIRBASE ROUND - APWS0096

MSRP \$10.99




BETTER DRAINAGE, BETTER GROWTH


Give your plants a lift with AirBase. This handy plate fits into the bottom of your pot and allows you to sidestep the use of a pebble layer for drainage. A beautifully simple and effective innovation, AirBase is fabricated from tough ABS plastic making it highly durable and thus extensively reusable.

- AirBase Square fits our 2.2 and 3.9 gal plastic pots
- AirBase Round fits our 6.6 gal plastic pots & 5 gal fabric pots

AIRDOME COMPATIBLE - AERATE YOUR ROOT ZONE FOR SUPERCHARGED GROWTH

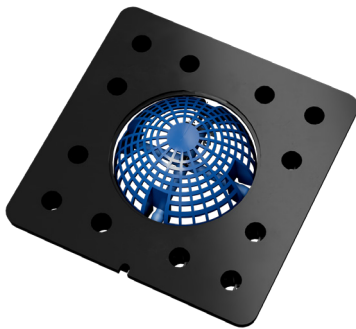

AIRBASE SQUARE WITH AIRDOME ⬆



AIRBASE ROUND WITH AIRDOME ⬆

AirBase features a pop-out centre-section allowing for easy, optional AirDome integration. The AirDome sits beneath the AirBase and pumps oxygen into your root zone via bubble pipe. This aeration helps roots expand more quickly and stimulates the development of a highly absorptive root structure for improved nutrient uptake. The aeration also helps to maintain the condition of your substrate, for a healthy, productive, disease-free root zone.



AIRBASE SQUARE WITH AIRDOME IN 1POT ⬆



AIRBASE ROUND WITH AIRDOME IN 1POT XL ⬆



AIRBASE ROUND WITH AIRDOME IN 5GAL GEOPOT ⬆

**Blue AirDomes for illustrative purposes only - production AirDomes now in black*

SEE PAGES 10 - 11 FOR PROPAGATION TIPS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

@AUTOPOTUSA

AUTOPOT-USA.COM

@AUTOPOTUSA



THE BEST SELLING FLEXIBLE RESERVOIR IN THE WORLD

A REVOLUTIONARY APPROACH TO WATER STORAGE

A FLEXITANK FOR VIRTUALLY ANY GROWING SPACE - BIG OR SMALL



SIMPLICITY ITSELF

FlexiTank revolutionizes water storage, it is everything you need in one compact box. These lightweight and durable reservoirs require no tools for assembly, reduce storage and shipping costs and take just minutes to assemble.

BUILT TO LAST

FlexiTanks incorporate a level of design and build quality that far outstrips that of our competitors. Thicker skins, higher grade seals and stronger fittings make FlexiTank the only collapsible reservoirs recommended for use with AutoPot Watering Systems.

FOR ANY SPACE

Available in seven sizes, from 6.6 gal to 265 gal, FlexiTanks allow growers to set up in hitherto unexplored spaces. The 6.6 and 13 gal FlexiTanks mean you can fit a reservoir virtually anywhere. These additions to the FlexiTank range mean that almost no space is too small for a system.

E: INFO@AUTOPOT-USA.COM

 AUTOPOT-USA.COM

 [@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)



FULLY COLLAPSIBLE WITH TOOL-FREE ASSEMBLY

LIGHTWEIGHT & DURABLE WITH 6 MONTHS MANUFACTURERS WARRANTY

INSTALL ANYWHERE, EASY TO SHIP AND STORE

6.6 GAL FLEXITANK - APWS006

MSRP \$49.99



13 GAL FLEXITANK - APWS007

MSRP \$59.99



PRO CLICK-FIT TANK ADAPTOR

& FILTER - APWSPROCLICK

RWP \$19.39

MSRP \$35.29



1/2" CLICK-FIT TANK ADAPTOR

& FILTER - APWS086

RWP \$13.39

MSRP \$25.99



25 GAL FLEXITANK - APWS010

MSRP \$69.99



60 GAL FLEXITANK - APWS011

MSRP \$95.99



1/2-3/8" CLICK-FIT TANK

ADAPTOR & FILTER - APWS085-A5

MSRP \$15.49



1/2"-1/4" CLICK-FIT TANK

ADAPTOR & FILTER - APWS085

MSRP \$15.49



105 GAL FLEXITANK - APWS012

MSRP \$139.99



200 GAL FLEXITANK - APWS013

MSRP \$199.99



HOSE CONNECTOR 1/2"

APWS084

MSRP \$6.69



FLEXITANK FITTING CAP

APWS046

MSRP \$5.69



265 GAL FLEXITANK - APWS014

MSRP \$249.99



FLEXITANK TAP

APWS015

MSRP \$10.69



FLEXITANK FITTING CLICK-FIT

APWS045

MSRP \$5.69



SEE PAGE 12 FOR RESERVOIR AND WATER USE TIPS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE



REFLECTIVE AND LIGHT-TIGHT; PERFECT FOR BRIGHT, HIGH TEMP SITUATIONS

CONCEALED SUPPORTS AND INTERNAL CAPACITY MARKINGS

ULTRA-STRONG, ANTI-TIP DESIGN



IN EXTREMIS

The Revolution Refined: FlexiTank Pro is the perfect solution for water storage in bright, high temperature situations. The reflective and light-tight skin can help to keep water and nutrient solution at a stable temperature in extreme climates.

PRACTICAL AND STYLISH

FlexiTank Pro's skin beautifully disguises an extremely rugged, fully collapsible design within. Concealed supports and internal capacity markings add neat edges to the proven, ultra-strong, ultra-practical FlexiTank design.

UPGRADE NOW

FlexiTank and FlexiTank Pro utilise the same accessories and fittings for easy integration with AutoPot Watering Systems. All AutoPot Watering Systems are available with the option to upgrade to a FlexiTank Pro reservoir. Ask your stockist for further details.

E: INFO@AUTOPOT-USA.COM

 AUTOPOT-USA.COM




 [@AUTOPOT_USA](https://www.instagram.com/AUTOPOT_USA)



ONE YEAR'S MANUFACTURERS WARRANTY

COMPLETE WITH ATTRACTIVE RETAIL PACKAGING

AVAILABLE AS AN UPGRADE ON ALL AUTOPOT WATERING SYSTEMS

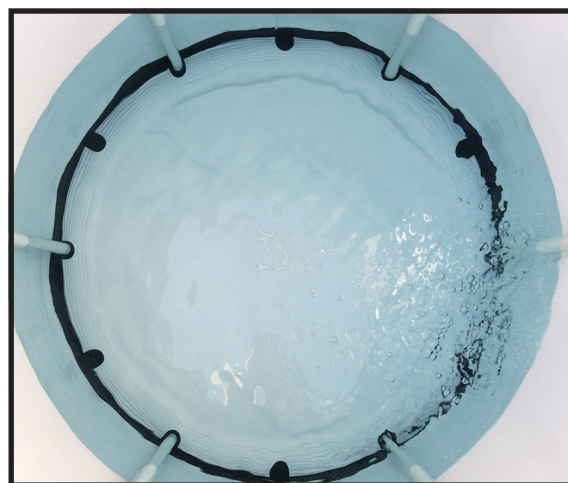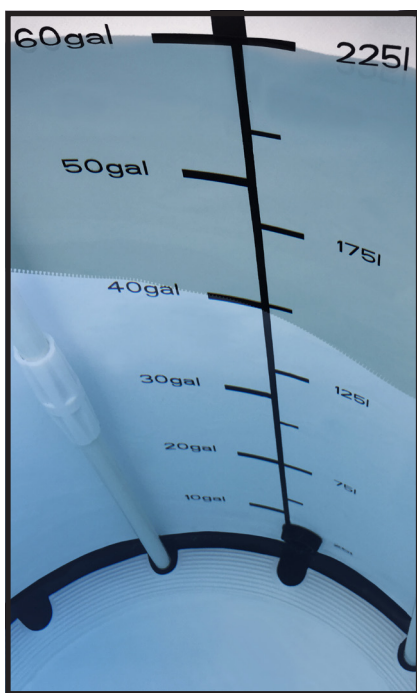

25 GAL FLEXITANK PRO - APWSPRO25G

MSRP \$149.95



60 GAL FLEXITANK PRO - APWSPRO60G

MSRP \$179.95



105 GAL FLEXITANK PRO - APWSPRO105G

MSRP \$199.95



SEE PAGE 12 FOR RESERVOIR AND WATER USE TIPS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

@AUTOPOTUSA

AUTOPOT-USA.COM

@AUTOPOTUSA

MODULES & PACKS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE

XXL MODULE - APWS300-9-A5

MSRP \$98.86



WITH 13GAL POT*
MSRP \$98.39

Includes:

1x XXL tray, lid & blanking grommet
1x 3/8" top hat grommet
1x 9 gal or* 13 gal fabric FlexiPot,
1x adaptive collar (XXL9 only)
1x AQUAvalve5,
3.3ft of 3/8" pipe,
1x root control PotSock,
1x 3/8" tee connector,
1x 1/2-3/8" tee connector,
1x 1/2-3/8" cross connector,
1x full instructions

1POTXL MODULE - APWS150-A5

MSRP \$65.99



Includes:

1x XL tray and lid
1x 3/8" top hat grommet
1x 6.6 gal pot,
1x AQUAvalve5,
3.3ft of 3/8" pipe,
1x root control disc,
1x 3/8" tee connector,
1x 1/2-3/8" tee connector,
1x 1/2-3/8" cross connector,
1x full instructions

GEPOT MODULE - GEOPOTX1-A5-5

MSRP \$63.99



WITH 3GAL POT*
MSRP \$62.99

Includes:

1x XL tray and lid
1x 3/8" top hat grommet
1x 5 gal or* 3 gal fabric GeoPot,
1x AQUAvalve5,
3.3ft of 3/8" pipe,
1x PotSock Round,
1x 3/8" tee connector,
1x 1/2-3/8" tee connector,
1x 1/2-3/8" cross connector,
1x full instructions

1POT MODULE - APWS100-A5

MSRP \$57.39



Includes:

1x 1Pot tray, lid & 3/8" top hat grommet
1x 3.9 gal pot,
1x AQUAvalve5,
3.3ft of 3/8" pipe,
1x root control disc,
1x 3/8" tee connector,
1x 1/2-3/8" tee connector,
1x 1/2-3/8" cross connector,
1x full instructions

EASY2GROW MODULE - APWS123-A5

MSRP \$88.99



WITH 3.9 GAL POTS
MSRP \$94.99

Includes:

1x easy2grow tray and lid,
2x 2.2 gal or* 3.9 gal pot,
1x AQUAvalve5,
3.3ft of 3/8" pipe,
2x PotSock Square,
1x 3/8" tee connector,
1x 1/2-3/8" tee connector,
1x 1/2-3/8" cross connector,
1x full instructions

1POT MODULE ACC. PACK - AQUAVALVE 5 - APWS021-A5

MSRP \$31.19



Incl. 1x AQUAvalve5, 3.3ft of 3/8" pipe, 1x marix disc, 1x root ctrl disc, 1x 3/8" tee,
1x 1/2-3/8" tee, 1x 1/2-3/8" cross, 1x 3/8" top hat grommet, 1x instructions

1POT XL MODULE ACC. PACK - AQUAVALVE 5 - APWS022-A5

MSRP \$32.99



Includes: 1x AQUAvalve5, .3ft of 3/8" pipe, 1x root ctrl disc, 1x 3/8" tee,
1x 1/2-3/8" tee, 1x 1/2-3/8" cross, 1x 3/8" top hat grommet, 1x instructions

EASY2GROW EXT. ACC. PACK - AQUAVALVE 5 - APWS024-A5

MSRP \$33.99



Includes: 1x AQUAvalve5, 1.3ft of 3/8" pipe, 1x 3/8" tee, 1x 1/2-3/8" tee,
1x 1/2-3/8" cross, 2x PotSock Squares, 1x full instructions

EASY2GROW KIT ACC. PACK - AQUAVALVE 5 - APWS023-A5

MSRP \$37.99



Includes:

1x AQUAvalve5
2x PotSock Square
1x 5ft of 3/8" Pipe
1x 3/8" top hat grommet
1x 3/8" Golf Filter
1x 3/8" inline tap
1x instructions

GEPOT MODULE ACC. PACK - AQUAVALVE 5 - APWSGEOPACK-A5

MSRP \$37.79



Includes:

1x AQUAvalve5
1x PotSock Round
1x 3/8" top hat grommet
1x 3/8" tee
1x 1/2-3/8" tee
1x 1/2-3/8" cross
1x 3.3ft of 3/8" Pipe
1x instructions

XXL9 MODULE ACC. PACK - AQUAVALVE 5 - APXXL/35L/PACK

MSRP \$58.79

INCL. POT



Includes:

1x AQUAvalve5
1x 9 gal Fabric Pot
1x PotSock for 9 gal Pot
1x 3/8" top hat grommet
1x 1/4" blanking grommet
3.3ft of 3/8" Pipe
1x 1/2-3/8" cross
1x 1/2-3/8" tee
1x 3/8" tee
1x instructions

XXL13 MODULE ACC. PACK - AQUAVALVE 5 - APXXL/50L/PACK

MSRP \$65.39

INCL. POT



Includes:

1x AQUAvalve5
1x 13 gal Fabric FlexiPot
1x PotSock for 13 gal Pot
1x 3/8" top hat grommet
1x 1/4" blanking grommet
3.3ft of 3/8" Pipe
1x 1/2-3/8" cross
1x 1/2-3/8" tee
1x 3/8" tee
1x instructions

MODULE PACKS & SPARES FOR 1/4" AQUAVALVE SYSTEMS AVAILABLE ON REQUEST - CONTACT YOUR REP FOR DETAILS



POTS & TRAYS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE



INCL. 3/8" TOP HAT GROMMET

XXL MODULE TRAY & LID - APWS02-A5

MSRP \$32.99



INCL. 3/8" TOP HAT GROMMET

1POT XL TRAY & LID - APWS152-A5

MSRP \$27.99



INCL. 3/8" TOP HAT GROMMET

1POT TRAY & LID - APWS062-A5

MSRP \$20.99



EASY2GROW TRAY & LID - APWS127A

MSRP \$23.99



9 GAL FABRIC FLEXIPOT - APWS9GFP

MSRP \$12.89



5 GAL FABRIC GEOPOT - APWSGEOPOT5

MSRP \$6.99



3 GAL FABRIC GEOPOT - APWSGEOPOT3

MSRP \$5.99



6.6 GAL POT BLACK - APWS151

MSRP \$15.99



6.6 GAL WHITEPOT - APWS151-W

MSRP \$19.48



3.9 GAL POT BLACK - APWS055

MSRP \$9.89



3.9 GAL WHITEPOT - APWS055-W

MSRP \$13.29



2.2 GAL POT BLACK - APWS126

MSRP \$7.39



2.2 GAL WHITEPOT - APWS126-W

MSRP \$9.99



LID FOR XXL MODULE TRAY - APWS303L

MSRP \$4.99



RING FOR XXL MODULE TRAY - APWS301R

MSRP \$6.99



LID FOR XL MODULE TRAY - APWS153

MSRP \$11.79



LID FOR 1POT MODULE TRAY - APWS056

MSRP \$10.39



LID FOR EASY2GROW TRAY - APWS127B

MSRP \$9.99



For



AUTO3/9XL BLANKING CAP - AUTOCAP

MSRP \$10.69



For AQUAvalve access holes on all tray systems

BLUE ACCESS COVER - BLUEACCESSCOVER

MSRP \$5.09



@AUTOPOTUSA



AUTOPOT-USA.COM



@AUTOPOTUSA



3/8" ACCESSORIES

FOR AUTOPOT WATERING SYSTEMS THAT USE AQUAVALVE5 & 3/8" PIPE

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE



3/8" STRAIGHT CONNECTOR - APWS072-A5

MSRP \$0.99



3/8" TEE CONNECTOR - APWS057-A5

MSRP \$1.19



1/2"-3/8" TEE CONNECTOR - APWS067-A5

MSRP \$2.49



3/8" END STOP - APWS068-A5

MSRP \$0.99



3/8" ELBOW CONNECTOR - APWS088-A5

MSRP \$1.99



3/8" CROSS CONNECTOR - APWS058-A5

MSRP \$1.85



1/2"-3/8" CROSS CONNECTOR - APWS066-A5

MSRP \$2.69



3/8" TOP HAT GROMMET - APWS060-A5

MSRP \$2.49



3/8" PIPE (5 FT LENGTH) - APWS049-A5

MSRP \$4.89



3/8" PIPE (100 FT ROLL) - APWS065-A5


MSRP \$89.99



CASE ONLY

3/8" GOLF FILTER CASE ONLY - APWS059-A5

MSRP \$5.39



GOLF FILTER MATERIAL ALL SIZES - APWS087

MSRP \$0.62




3/8" IN-LINE TAP - APWS063-A5

MSRP \$5.95



AQUAVALVE5 - APWS050-A5

MSRP \$26.79



AQUAVALVE5 BOTTOM FLOAT SILICONE - APWS064B

MSRP \$0.62



AQUAVALVE5 TOP FLOAT SILICONE - APWS064

MSRP \$0.62



Complete with lid and 3/8" Top Hat Grommet

12.4 GAL RES. WITH LID & GROMMET - APWS053A

MSRP \$36.79 MSRP \$26.79



12.4 GAL RESERVOIR ONLY - APWS053

MSRP \$26.79



LID FOR 12.4 GAL RESERVOIR - APWS054

MSRP \$10.39



AQUAVALVE5 COLLAR - APWS074-A5

MSRP \$1.29

E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM

@AUTOPOT_USA



1/2" ACCESSORIES

SUITABLE FOR ANY AUTOPOT WATERING SYSTEM THAT USES 1/2" PIPEWORK

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE



1/2" STRAIGHT CONNECTOR - APWS080

MSRP \$2.49



1/2" TEE CONNECTOR - APWS078

MSRP \$2.79



1/2" ELBOW CONNECTOR - APWS088

MSRP \$1.94



1/2" END STOP - APWS081

MSRP \$1.94



1/2"-3/8" CLICK FIT FILTER - APWS085-A5

MSRP \$15.49



1/2" INLINE TAP - APWS075

MSRP \$6.19



1/2" CROSS CONNECTOR - APWS079

MSRP \$5.29



1/2" GROMMET (3/4" HOLE RQD) - APWS082

MSRP \$2.39



1/2" SNAP ON COUPLER - SNAPCOUPLER

MSRP \$4.49



1/2" INLINE FILTER - APWS069

MSRP \$14.49



1/2" CLICK-FIT INLINE FILTER - APWS086

MSRP \$25.99



1/2" CLICK-FIT PROFILTER - APWSPROCLICK

MSRP \$35.29



1/2" PROFILTER - PROFILTER/1

MSRP \$26.89



HOSE CONNECTOR - APWS084

MSRP \$6.69



TAP FOR ALL WATER BUTTS - APWS076

MSRP \$15.99



FLEXITANK FITTING CAP - APWS046

MSRP \$5.69



FLEXITANK FITTING CLICK-FIT - APWS045

MSRP \$5.69



FLEXITANK TAP - APWS015

MSRP \$10.69



1" GROMMET (1" HOLE RQD) APWS083

MSRP \$2.49



COLOR MAY DIFFER TO THAT SHOWN

1/2" PIPE 100 FT ROLL - APWS077

MSRP \$117.79



1/4" ACCESSORIES

INC. 1/2"-1/4" FITTINGS & FILTERS - FOR OLDER AUTOPOT WATERING SYSTEMS

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE



1/4" STRAIGHT CONNECTOR - APWS072

MSRP \$0.99



1/4" TEE CONNECTOR - APWS057

MSRP \$1.19



1/2"-1/4" TEE CONNECTOR - APWS067

MSRP \$2.49



1/4" END STOP - APWS068

MSRP \$0.99



1/4" PIPE (5 FT LENGTH) - APWS049

MSRP \$4.49



1/4" CROSS CONNECTOR - APWS058

MSRP \$1.85



1/2"-1/4" CROSS CONNECTOR - APWS066

MSRP \$2.69



1/4" GROMMET - APWS060

MSRP \$2.49



1/4" HOSEPIPE 164 FT ROLL - APWS065

MSRP \$89.99



1/2"-1/4" CLICK-FIT FILTER - APWS085

MSRP \$15.49



1/2"-1/4" INLINE FILTER - APWS070

MSRP \$10.39



1/4" GOLF FILTER CASE ONLY - APWS059

MSRP \$5.39



1/4" INLINE TAP - APWS063

MSRP \$5.85



AQUAVALVE COLLAR - APWS074

MSRP \$1.29



AQUAVALVE - APWS050-A4

MSRP \$26.79



AQUAVALVE SILICONE(OLD VALVES) - APWS064-A4

MSRP \$0.62



FOR ALL
AQUAVALVES

AQUAVALVE COVER - APWS073

MSRP \$11.79



FOR ALL
AQUAVALVES

AQUAVALVE TOP FLOAT DISC - FLOATCAP

MSRP \$1.99



REPLACEMENT SPIRIT LEVEL - APWS017

MSRP \$1.99



3/8" - 1/4" TOP HAT GROMMET - APWS061

MSRP \$2.49

E: INFO@AUTOPOT-USA.COM

AUTOPOT-USA.COM

@AUTOPOT_USA



ROOT CONTROL

MSRP = MANUFACTURERS SUGGESTED RETAIL PRICE



ROOT CTRL DISC SQ - APWS051

MSRP \$2.39



ROOT CTRL DISC ROUND - APWS154

MSRP \$3.59



For 13 gal FlexiPots

POTSOCK (13GAL) - POTSOCKXXL13G


MSRP \$13.99



For 9 gal FlexiPots

POTSOCK (9GAL) - POTSOCKXXL9G

MSRP \$11.19



To weigh down AquaValve PotSocks in open trays

AQUAVALVE POTSOCK PLATE - POTSOCKPLATE

MSRP \$10.69



For 6.6 gal or 5 gal pots

POTSOCK ROUND - POTSOCKXL


MSRP \$8.39



For 2.2 gal or 3.9 gal pots

POTSOCK SQUARE - POTSOCKSQ

MSRP \$5.95



For 5 gal pots - with drawstring

DRAWSTRING POTSOCK - POTSOCKDS

MSRP \$12.99



AQUAVALVE POTSOCK - POTSOCK/AQ

MSRP \$2.69



Use if placing AquaValve in open trays with fabric pots

AQUAVALVE POTSOCK KIT-POTSOCKAQKIT

MSRP \$12.89

GARDEN TRAYS

GROW BAG TRAY - G182B

MSRP - \$13.95



39.5" (100cm) Long, 16" (40cm) Wide, 2" (5cm) High

JUMBO GARDEN TRAY - G15B

MSRP - \$26.69



46" (117cm) Long, 16" (40cm) Wide, 2" (5cm) High

2 X 2 SQ GARDEN TRAY - G45B

MSRP - \$29.99



23" (59cm) Long, 23" (59cm) Wide, 3" (7cm) High

4 X 2 GARDEN TRAY - G82B


MSRP - \$39.99



47" (120cm) Long, 21.5" (55cm) Wide, 2" (5cm) High

3 X 2 GARDEN TRAY - G95B

MSRP - \$39.99

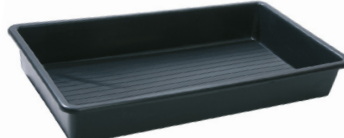

39.5" (100cm) Long, 21.5" (55cm) Wide, 6" (15cm) High

2.5 X 2.5 SQ GARDEN TRAY - G172B

MSRP - \$45.99



31.5" (80cm) Long, 31.5" (80cm) Wide, 5" (12cm) High

3 X 3 SQ GARDEN TRAY - G112B

MSRP - \$82.99



39.5" (100cm) Long, 39.5" (100cm) Wide, 5" (12cm) High

4 X 4 SQ GARDEN TRAY - G127B


MSRP - \$107.59



47" (120cm) Long, 47" (120cm) Wide, 5" (12cm) High

XL DOME PROPAGATOR - G155B

MSRP - \$29.99



23" (58cm) Long, 16" (40.5cm) Wide, 9" (22.5cm) High



AUTOPOT GROWERS

THE OXFORDSHIRE CHILLI FARM, UK

The Oxfordshire Chilli Farm (Plantasia) have been growing capsicums using AutoPot Watering Systems for 10 years. AutoPot offer growing solutions to each variety under cultivation. For large 'super-hot' varieties the XL System provides ideal size and adjustability. Habanero and Scotch Bonnets are served by the 1Pot System. Sweet peppers are grown using the high-wire method in easy2grow with 15L pots instead of the 8.5L as this suits these capsicums better. For further details of Plantasia's current chilli selection, nutrient and substrate combinations and greenhouse layouts visit www.plantasia.co.uk




Crop Type: Capsicum Chinense var. 7Pot Primo
Greenhouse size: 11,000 sq ft Keder House
AutoPot Systems Used:
 easy2Propagate, easy2grow, 1Pot, 1Pot XL
Crops per year: 1 **Growing Media:** Coco/Soil
Yield: 4lb/sq ft



MEDWYN WILLIAMS - MEDWYN OF ANGLESEY

A 13-time RHS Chelsea Gold Medallist, Medwyn Williams is famed for cornucopias of immaculately grown, specimen vegetables. For him the chief prospects of using AutoPot were savings in time and costs, without ever compromising on plant health or veg quality. Medwyn was also intrigued by the potential of AutoPot to act as a leveller where competition growing is concerned. Two years of using the systems have brought about his latest Gold Medal, and confirmed his suspicion; that AutoPot brings the growing of large, exhibition-quality veg onto a level playing field. He predicts that, in future, far more entries on show benches will be AutoPot grown.

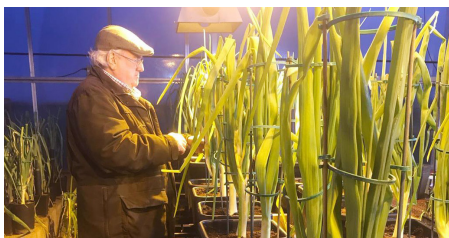

Crop Type: Leeks, Onions, Potatoes (with AutoPot)
Greenhouse Size: 2000 sq ft
AutoPot Systems Used: 1Pot XL, 1Pot, easy2grow, easy2propagate **Growing Media:** 100% Coco Coir
Crops Per Year: Multiple **Nutrients Used:** Mineral
Follow: Insta @medwynsofangle



KUNYA BEACH, KENYA

Kunya Beach Nursery is located in an important horticultural region of Africa. Growers in the area must meet stringent government criteria given the existing demands on local resources. AutoPot Watering Systems easily meet these criteria thanks to their water efficiency and power-free operation. For this reason the nursery has attracted a great deal of government and commercial interest. Sustainable horticulture is seen as a great driver for potential local employment. Furthermore the market for affordable, reliable crops is vast and, by utilising such systems, the overheads are minimal.



Crop Type: Tomatoes, Peppers, Melons
Greenhouse Size: 13,000 sq ft
AutoPot Systems Used: easy2grow, WhitePot
Growing Media: Pumice and Cocopeat 50/50
Crops Per Year: 2 **Nutrients Used:** Mineral Compound
Yield: 5lb/sq ft





STORE RESOURCES

PUT YOUR STORE ON THE MAP!

AutoPot Stockist? Want to be at the fingertips of customers everywhere? Join our Store Finder - FREE!

How? **1** Simply scan the QR **2** Submit your application online **3** We put you on the map.

Interested? Visit autopot.co.uk/store-locator-application-form-uk/ or scan the QR code here:



IN-STORE DISPLAYS

Our Reps are more than happy to help you fly the flag for AutoPot. Talk to them about our vast and varied range of branded in-store marketing materials, all designed to see you enhance sales and much of it customizable. Co-branding with your logo? Why not? To fit your space? Can do. A huge archive of glorious AutoPot in-action images to work with? Absolutely.

THE RESOURCE CENTRE

Get product images, systems info, diagrams, Quick-Guides and more - all via the Resource Centre at autopot.co.uk.

Whether you're building a website or crafting print literature we want to see you get the best out of our resources.

Get the required password by emailing info@autopot-usa.com. Alternatively reach us by scanning the QR here:



VIDEOS FOR WEB AND IN-STORE

We know an increasing number of stores are looking to promote AutoPot in-store or online via video content. In order to assist we've assembled an array of videos ready to be embedded, uploaded via file-copies, or played via file in-store. Get in touch with your Rep to request access to a wealth of great content- assembly videos, animations, and, in the near-future, tutorial videos showing your customers how to get the most out of their systems.

THE AUTOPOT NEWSLETTER

Growers from around the world sharing their genius techniques with AutoPot, the latest product news and grow tests with myriad producers combining forces with AutoPot, the full rundown on where to find us on the show circuit, special offers, unmissable store resources, and the latest on the U.K.'s premier trade-hydroponic event The AutoPot Summer Social - for all this joy and more sign up now to the AutoPot Newsletter - scan the QR here:



FOLLOW US FOR THE LATEST

As-it-happens updates on everything AutoPot and a great opportunity to see your store featured on our feeds. Our Reps are plenty snap-happy when they make their rounds and we enjoy sharing your displays and in-store innovations with our following. Every page herein includes our tags in the footer.




www.autopot-usa.com

Available worldwide




manufacturer

Email: mail@autopot.co.uk
Web: www.autopot.co.uk



distributor

Email: info@autopot.asia
Web: www.autopot.asia




distributor

Email: info@autopot.nl
Web: www.autopot.nl



distributor

Email: info@autopot-canada.ca
Web: www.autopot-canada.ca



distributor

Email: autopot.france@gmail.com
Web: www.autopot.fr




distributor

Email: info@autopot-usa.com
Web: www.autopot-usa.com



distributor

Email: mail@autopot.es
Web: www.autopot.es

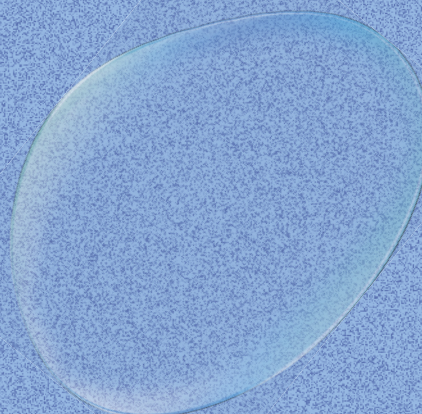

AutoPot USA
Postal Address Only
AutoPot USA
10016 Pioneer Blvd, Suite 222,
Santa Fe Springs, CA 90670

Warehouse Address
AutoPot USA 919 Penn Avenue
Pittsburgh, PA 15221

Tel: +1 (702) 338-0373

Email: info@autopot-usa.com
Web: www.autopot-usa.com



@autopot_usa



/autopotUSA



@autopotusa



©AutoPot Global Ltd 2023

All prices correct 1st January 2023